




VIEW ON HV SIDE
PHASE ROTATION
1U 1V 1W

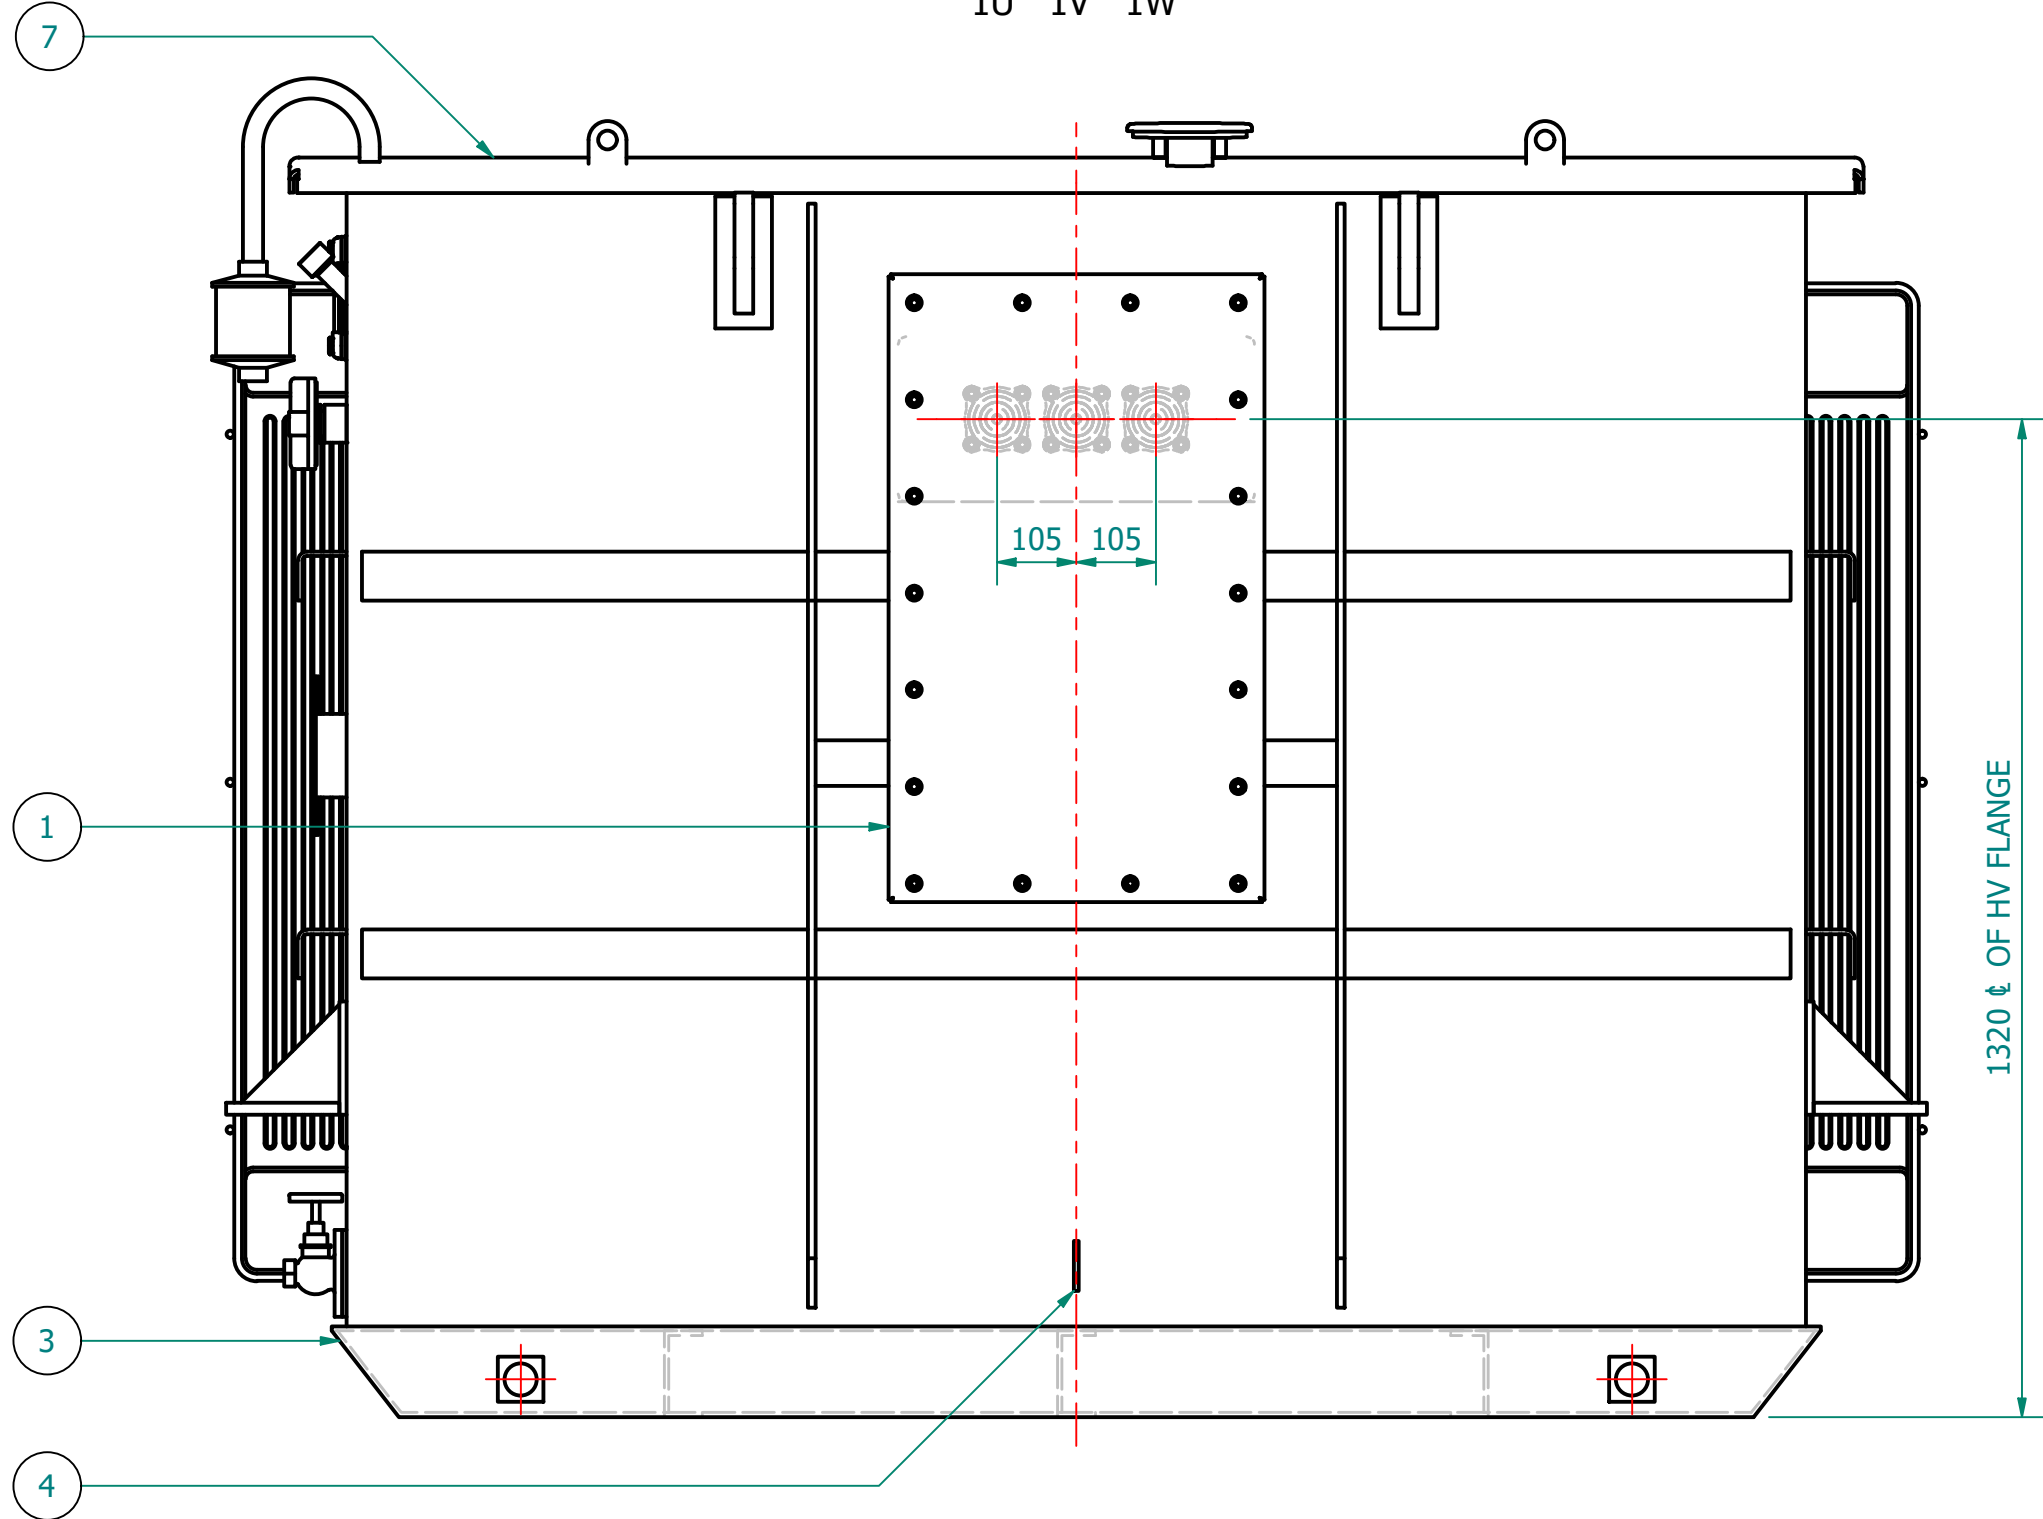


VIEW ON TAP SWITCH END

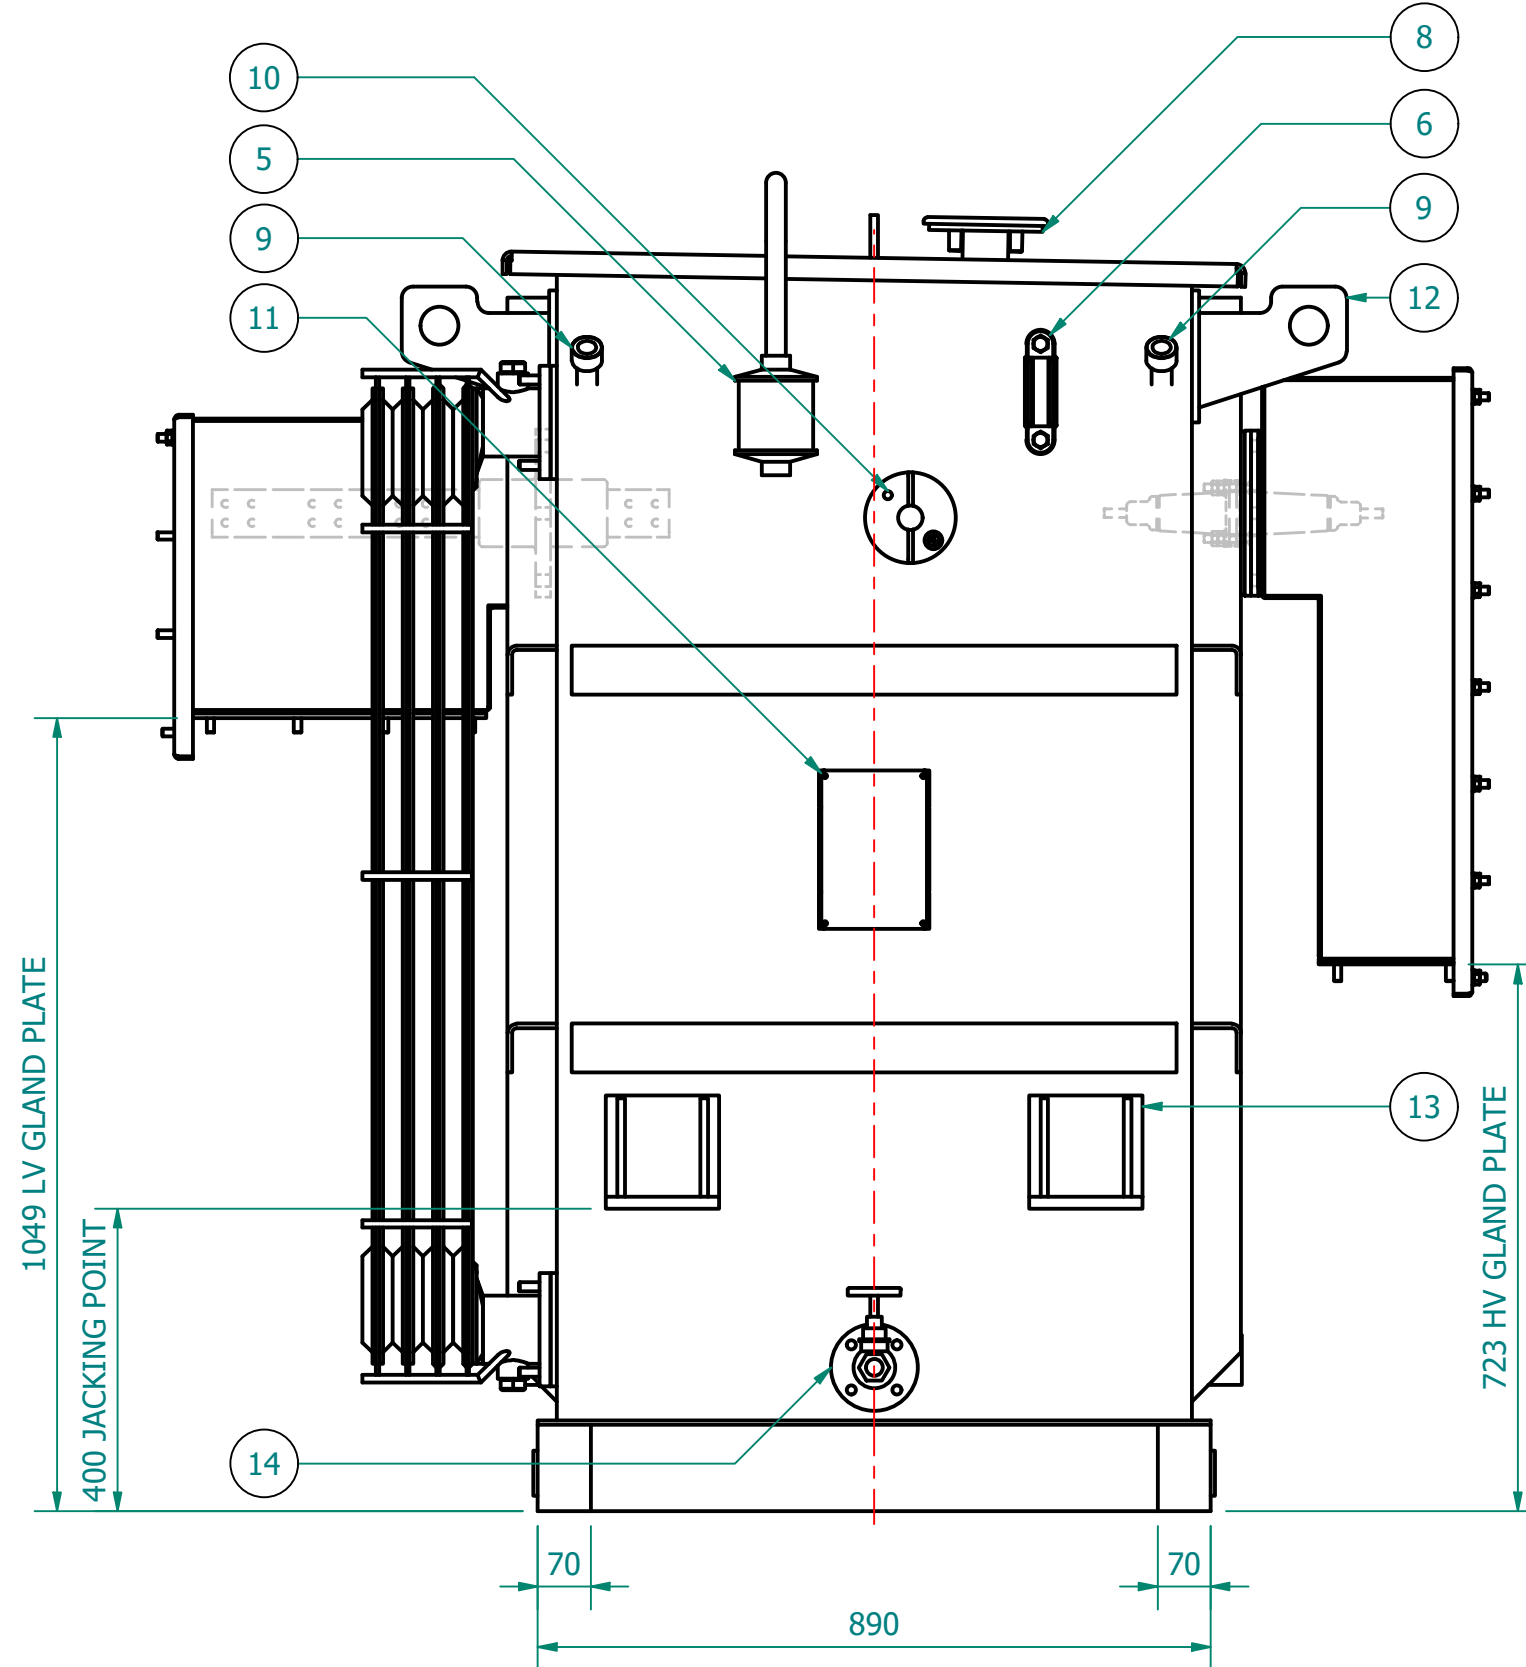

VIEW ON LV SIDE
PHASE ROTATION
2W 2V 2U 2N

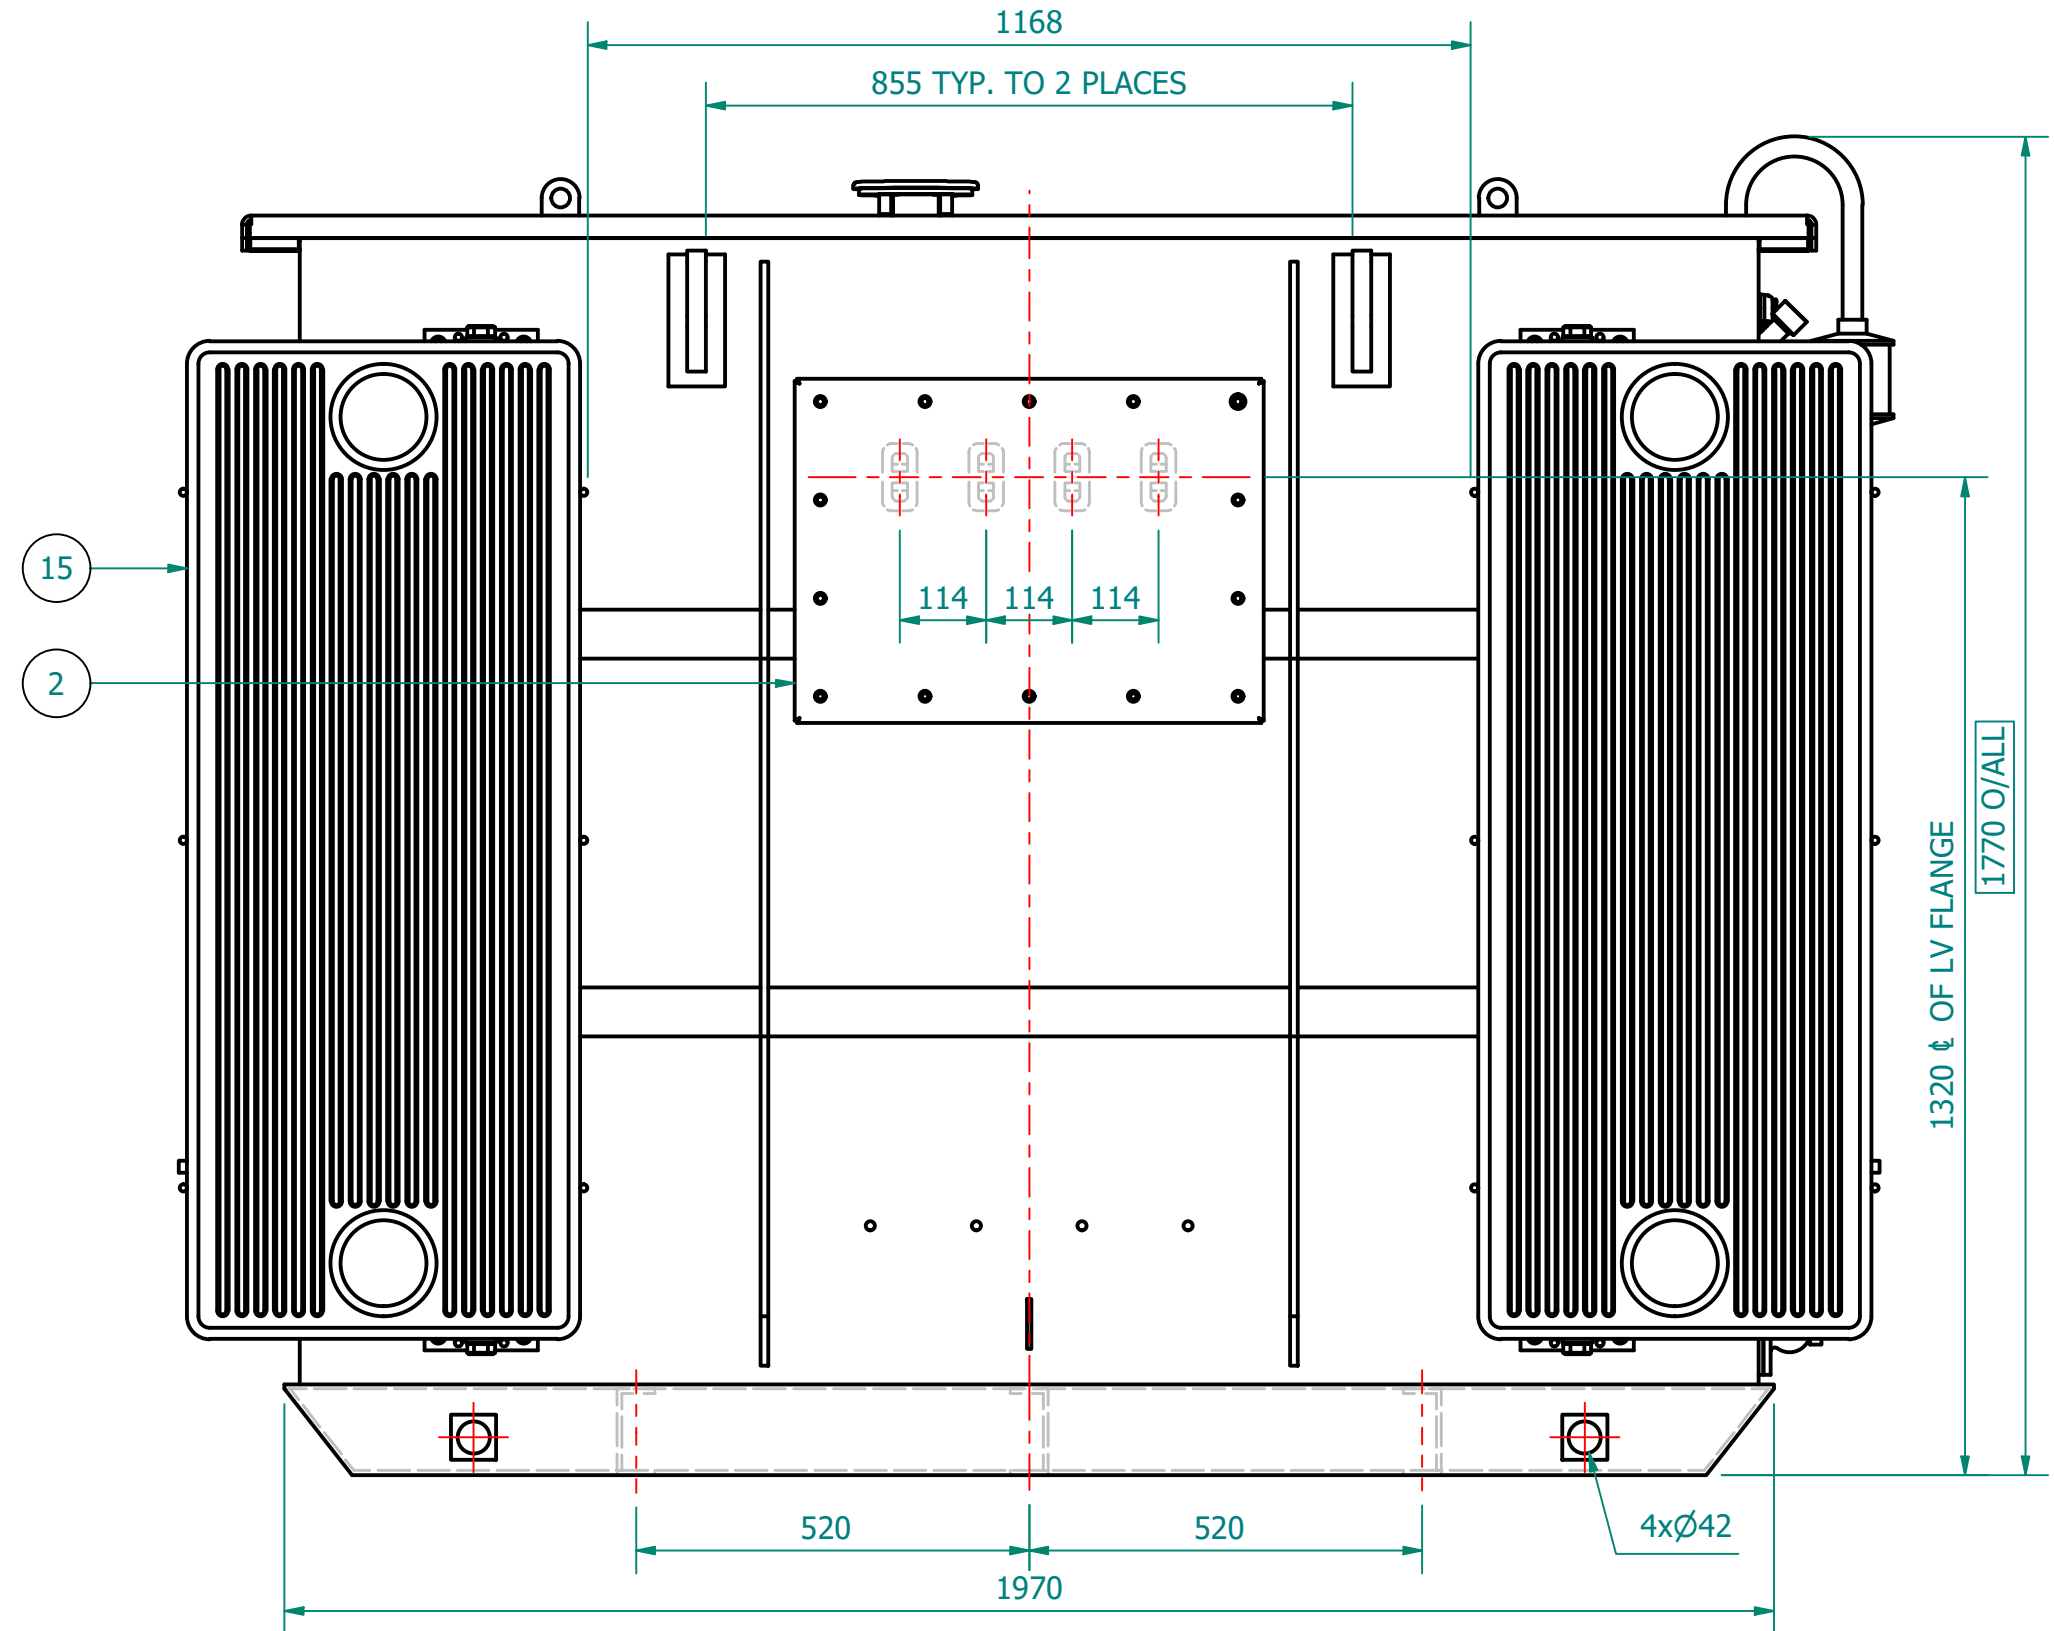

PLAN VIEW

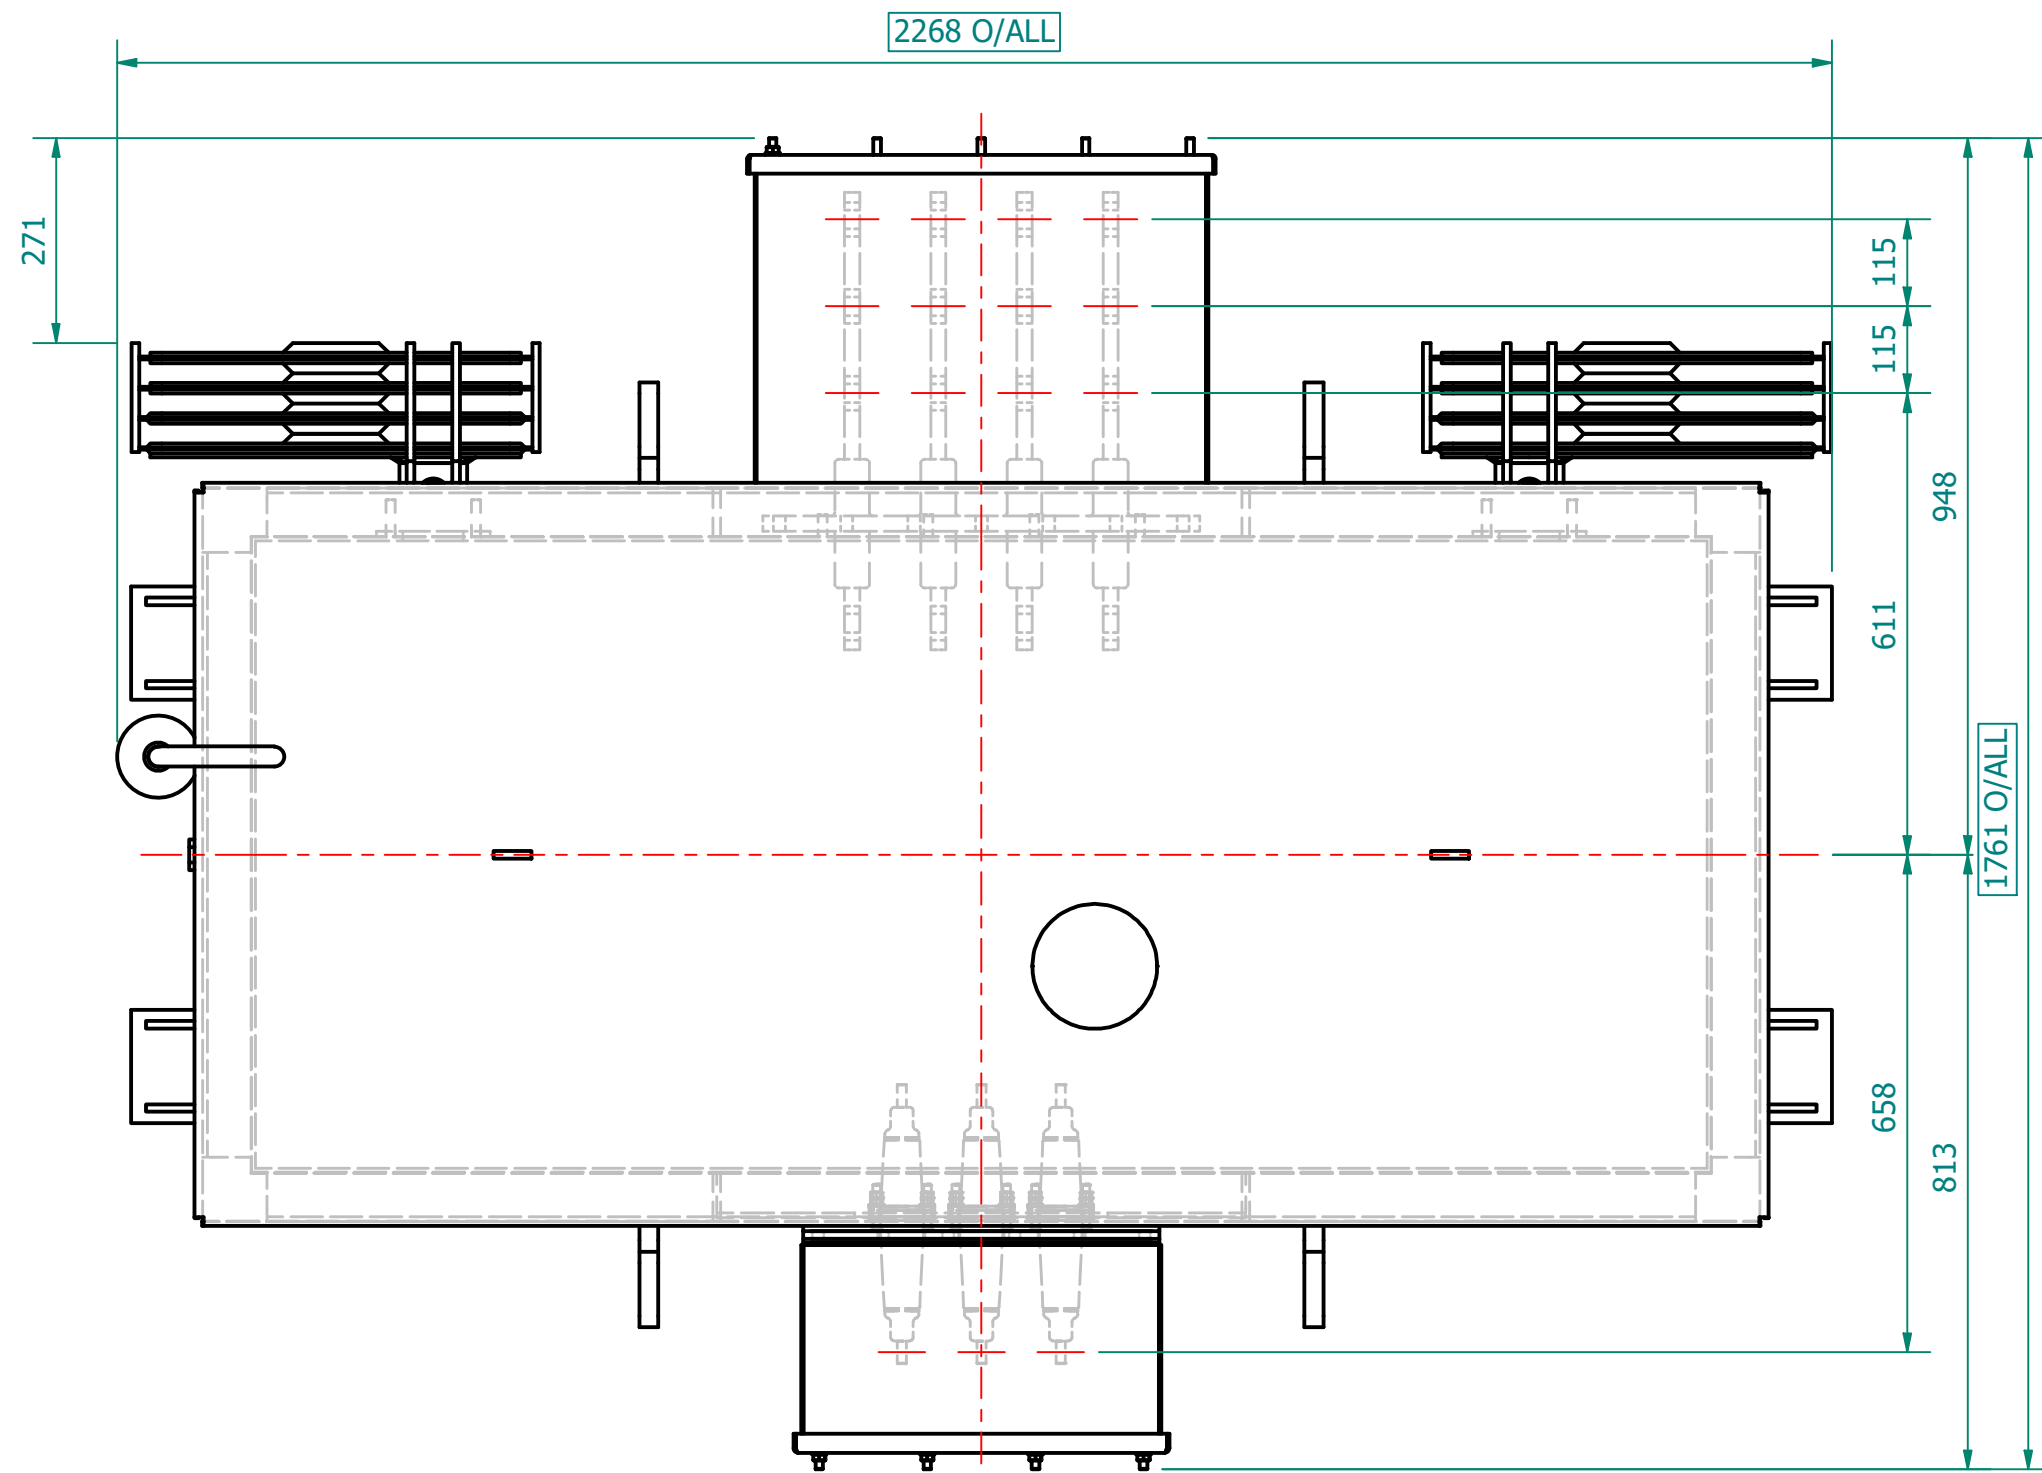



TRANSFORMER WEIGHT & VOLUME		
CORE AND WINDING	kg	3880
TANK AND FITTING	kg	1050
COOLING LIQUID VOLUME	L	1413
COOLING LIQUID WEIGHT	kg	1371
TOTAL TX WEIGHT	kg	6301

VIEW OF LV SIDE - CABLE CLEAT STUDS
CABLES MUST BE SUPPORTED IN ACCORDANCE WITH -
CURRENT IET Wiring Regulations BS7671 & IEC 61914



4x M12 x 30 @ 140mm PITCH ~430mm FROM THE GROUND

ESSENTIAL LABELS

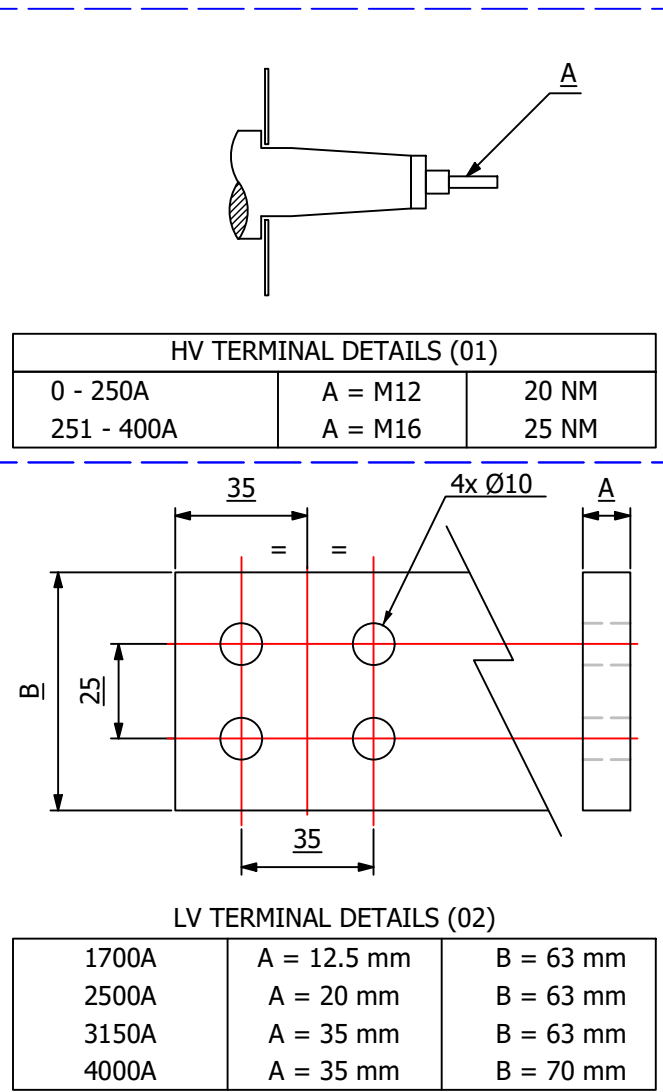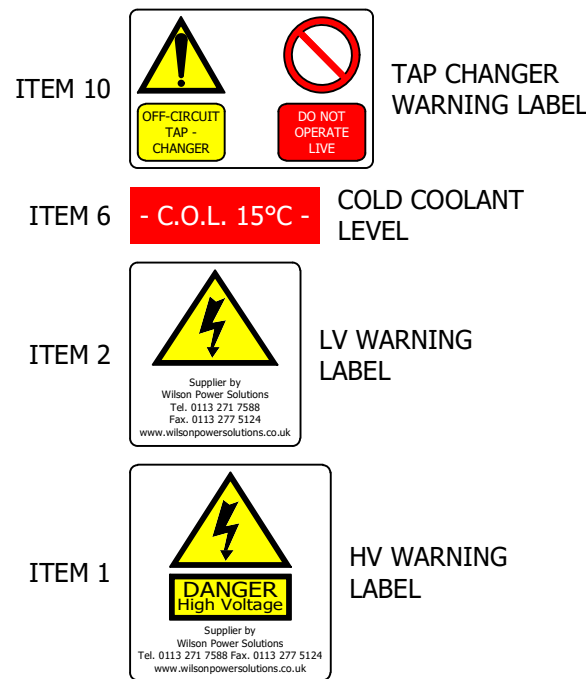

1600kVA ELECTRICAL RATINGS					
No Load Voltage Ratio at Normal Tap	HV Tappings	Vector Group	Frequency	Full-Load Current at Normal Tap	
				HV Side	LV Side
11000 / 415V	+7.5 to -5.0% IN 2.5% INCREMENTS	Dyn11	50Hz	83.978A	2225.929A
Design Impedance at Normal Tap	No Load Losses at rated Voltage & Frequency	Full Load Losses at rated Current & at 75°C Temp.	Temp. Rise above Ambient 40°C		
			in Oil by Therm.	in Wdg. by Res.	
5.50%	675W	9170W	60°C	65°C	
GENERAL NOTES					
1 ALL DIMENSIONS ARE IN 'mm'.					
2 ALL DIMENSIONS/WEIGHTS ARE SUBJECT TO ± 10% TOLERANCE.					
3 ELECTRONIC SCALE - 1:1 (ONLY WRITTEN DIMENSIONS TO BE FOLLOWED).					
4 TOLERANCE ON IMPEDANCE PER IEC:60076.					
5 PAINT SHADE.: 632 As PER BS:381C (SEMI GLOSS) TO ISO12944 - MIN C4H SPEC.					
6					
7					
8					
9					

ITEM	QTY	DESCRIPTION
15	2	DETACHABLE RADIATORS with AIR-RELEASE & DRAIN PLUG (520W x 1200C x 45 x 40P)
14	1	DRAIN VALVE (25NB) with MALE PLUG
13	4	JACKING PADS
12	4	TRANSFORMER LIFTING LUGS
11	1	RATING & DIAGRAM PLATE (SS)
10	1	OFF-CIRCUIT TAP SWITCH (6-Position & Padlockable)
9	2	THERMOMETER POCKET (3/4" BSP MALE THREAD)
8	1	OIL FILLING PIPE WITH FLANGED COVER
7	1	TOP COVER with LIFTING LUGS (x2)
6	1	OIL LEVEL GAUGE (with 15°) COLD OIL LEVEL MARK
5	1	ENVIRO GEL BREATHER TYPE R
4	2	EARTHING TERMINAL (FLAT TYPE suitable for M12 Bolt)
3	1	TRANSFORMER BASE (SKID TYPE) c/w HAULAGE HOLES & BRACING
2	1	LV CABLE BOX - 1.1kV, 4-POLE, AIR INSULATION, (FACING-'F', BS:2562) SUITABLE FOR 3 x 1c CABLES PER PHASE & N - MAX. 630mm.sq
1	1	HV CABLE BOX - 12KV, 3-POLE, HEAT-SHRINK INSULATION, (FACING-'E' BS:2562) SUITABLE FOR 1 x 3c CABLE - MAX. 185mm.sq

IF IN DOUBT - ASK. REMOVE ALL SHARP EDGES. DO NOT SCALE. DRAWING NOT TO SCALE

REVISION HISTORY				DESCRIPTION
REV	REV BY	VERIFIED	APPROVED	

CURRENT REVISION	REVISION DESCRIPTION		REV 00	PROJECT	
	ORIGINAL			CUSTOMER	
			S.O. NUMBER		
			DATE		
	REV. BY:	SATHWIK	24-MAR-2026	P.O. NUMBER	
	VERIFIED:			W.O. NUMBER	
	APPROVED:				

DRAWING TITLE
GENERAL ARRANGEMENT DRAWING FOR
1600kVA WILSON e4 AMORPHOUS ULTIMATE LOW LOSS
11000/415V, 50Hz, Dyn11, KNAN
AL WOUND DISTRIBUTION TRANSFORMER

DRAWN BY:
SATHWIK
DATE:
24-03-2026
DRAWING NO.:

WILSON POWER SOLUTIONS
Westland Square, Leeds,
West Yorkshire LS11 5SS, United Kingdom
Tel: +44 (0) 113 271 7588
Fax: +44 (0) 113 277 5124
web: www.wilsonpowersolutions.co.uk email: info@wilsonpowersolutions.co.uk

WPS-E4-1600-AL-GA-KNAN

SHEET 1 OF 1