




VIEW ON HV SIDE
PHASE ROTATION
1U 1V 1W

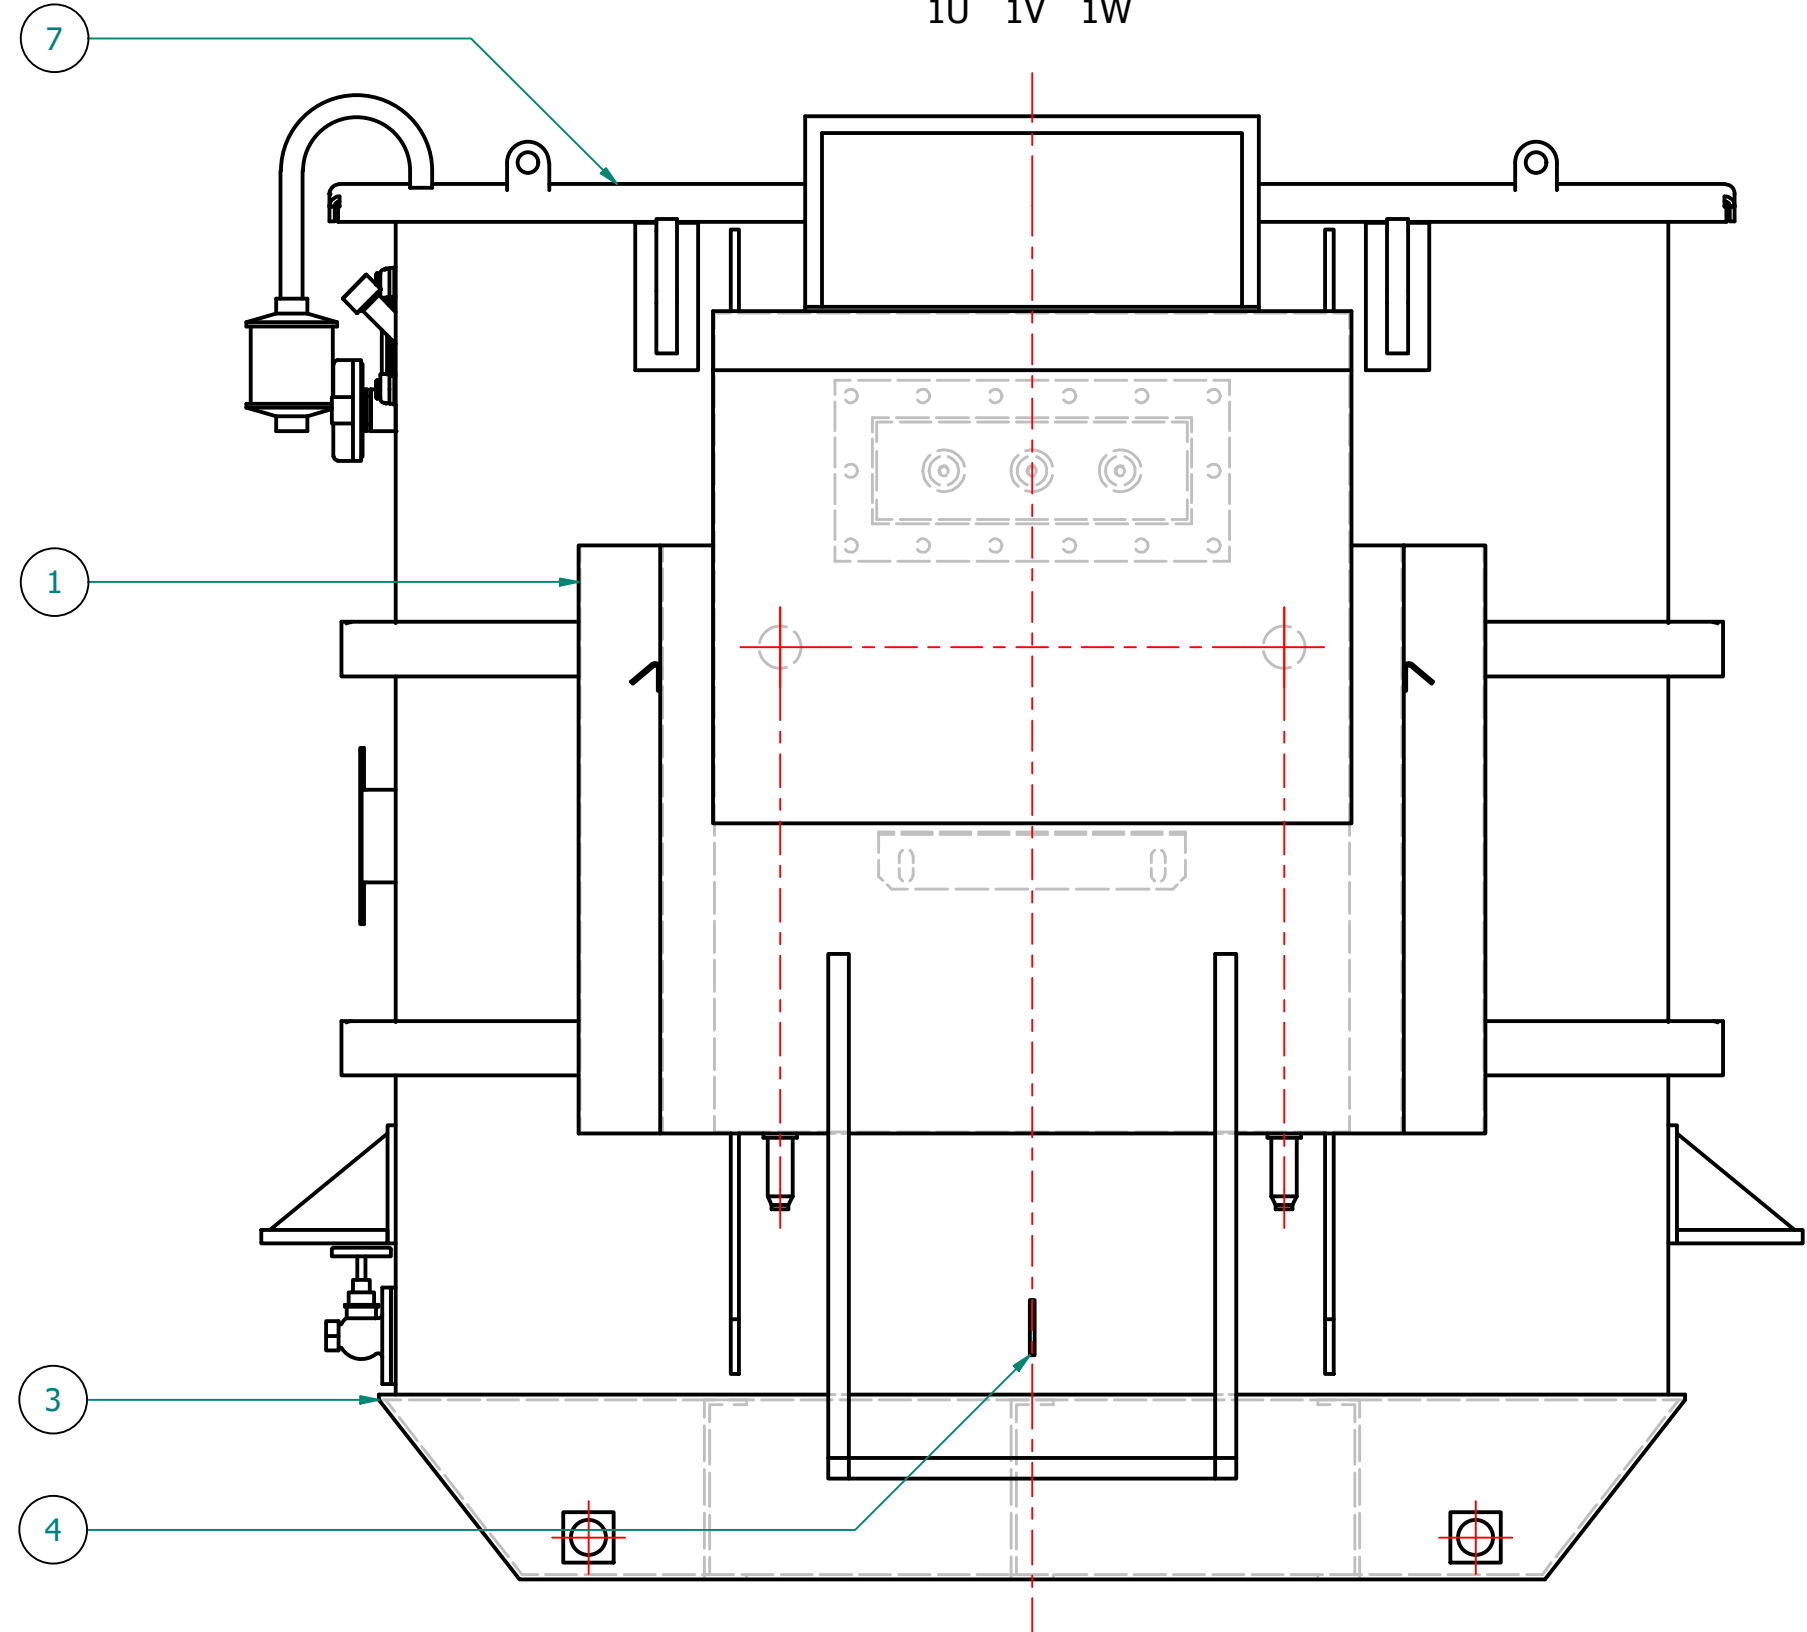


VIEW ON TAP SWITCH END

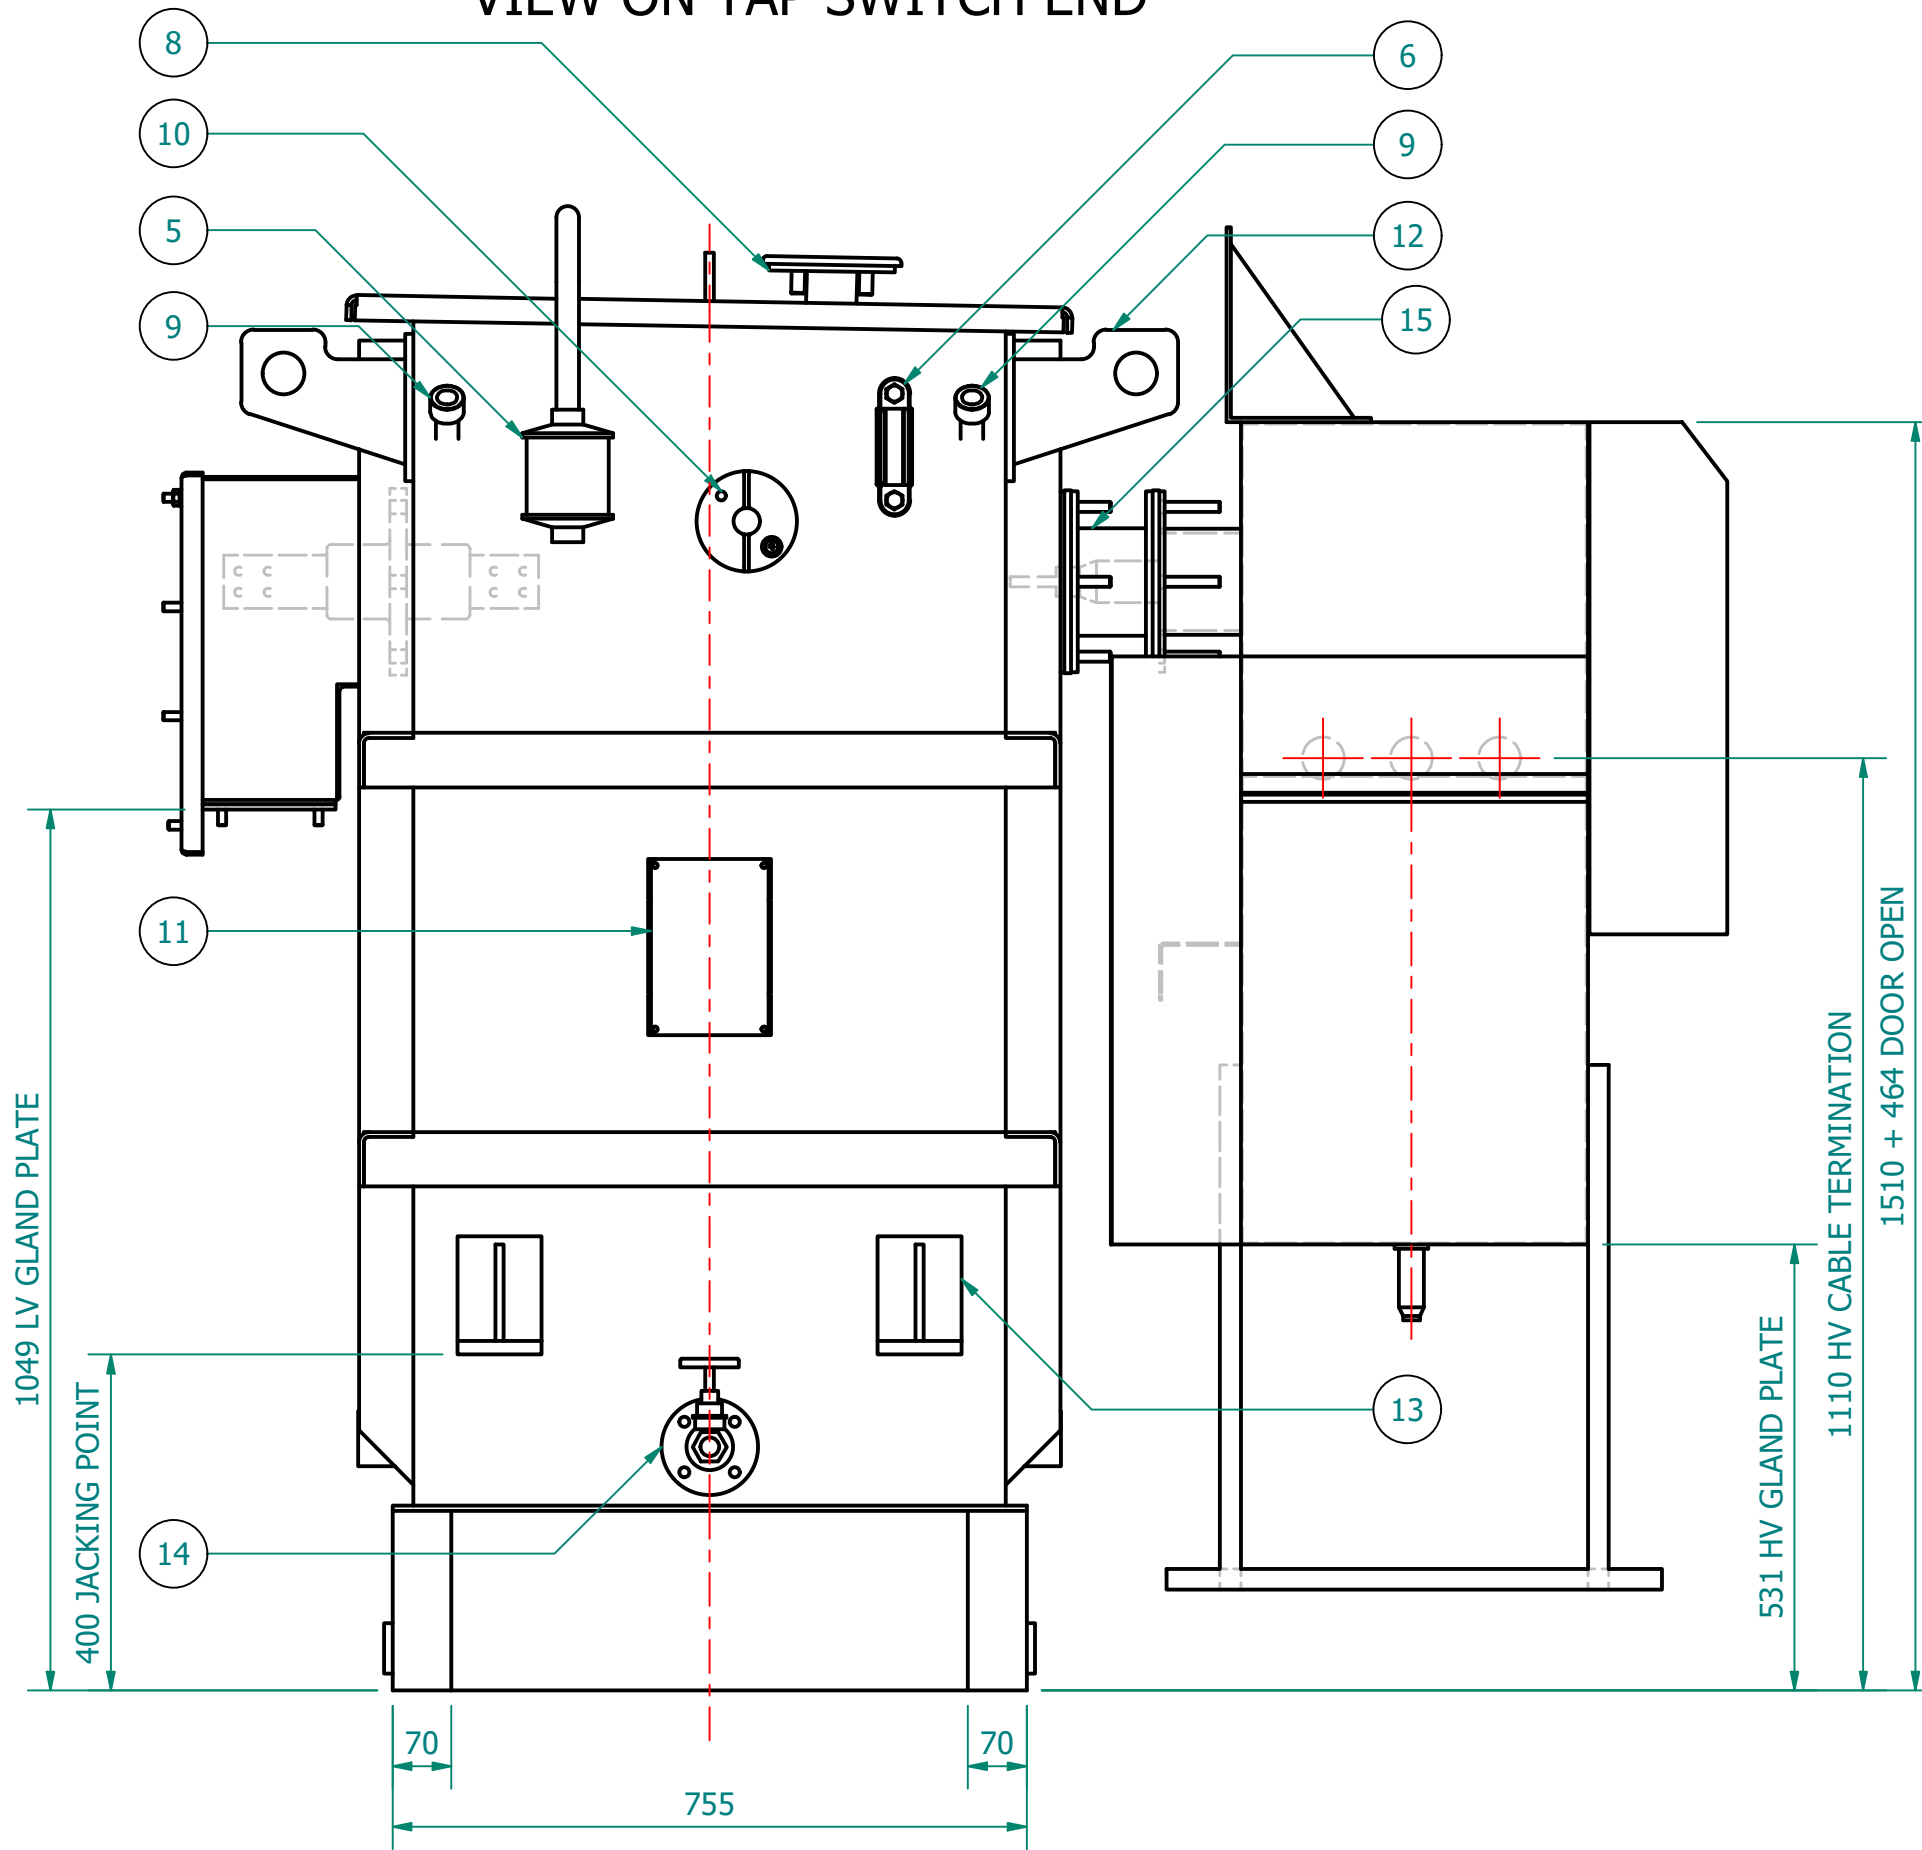

VIEW ON LV SIDE
PHASE ROTATION
2W 2V 2U 2N

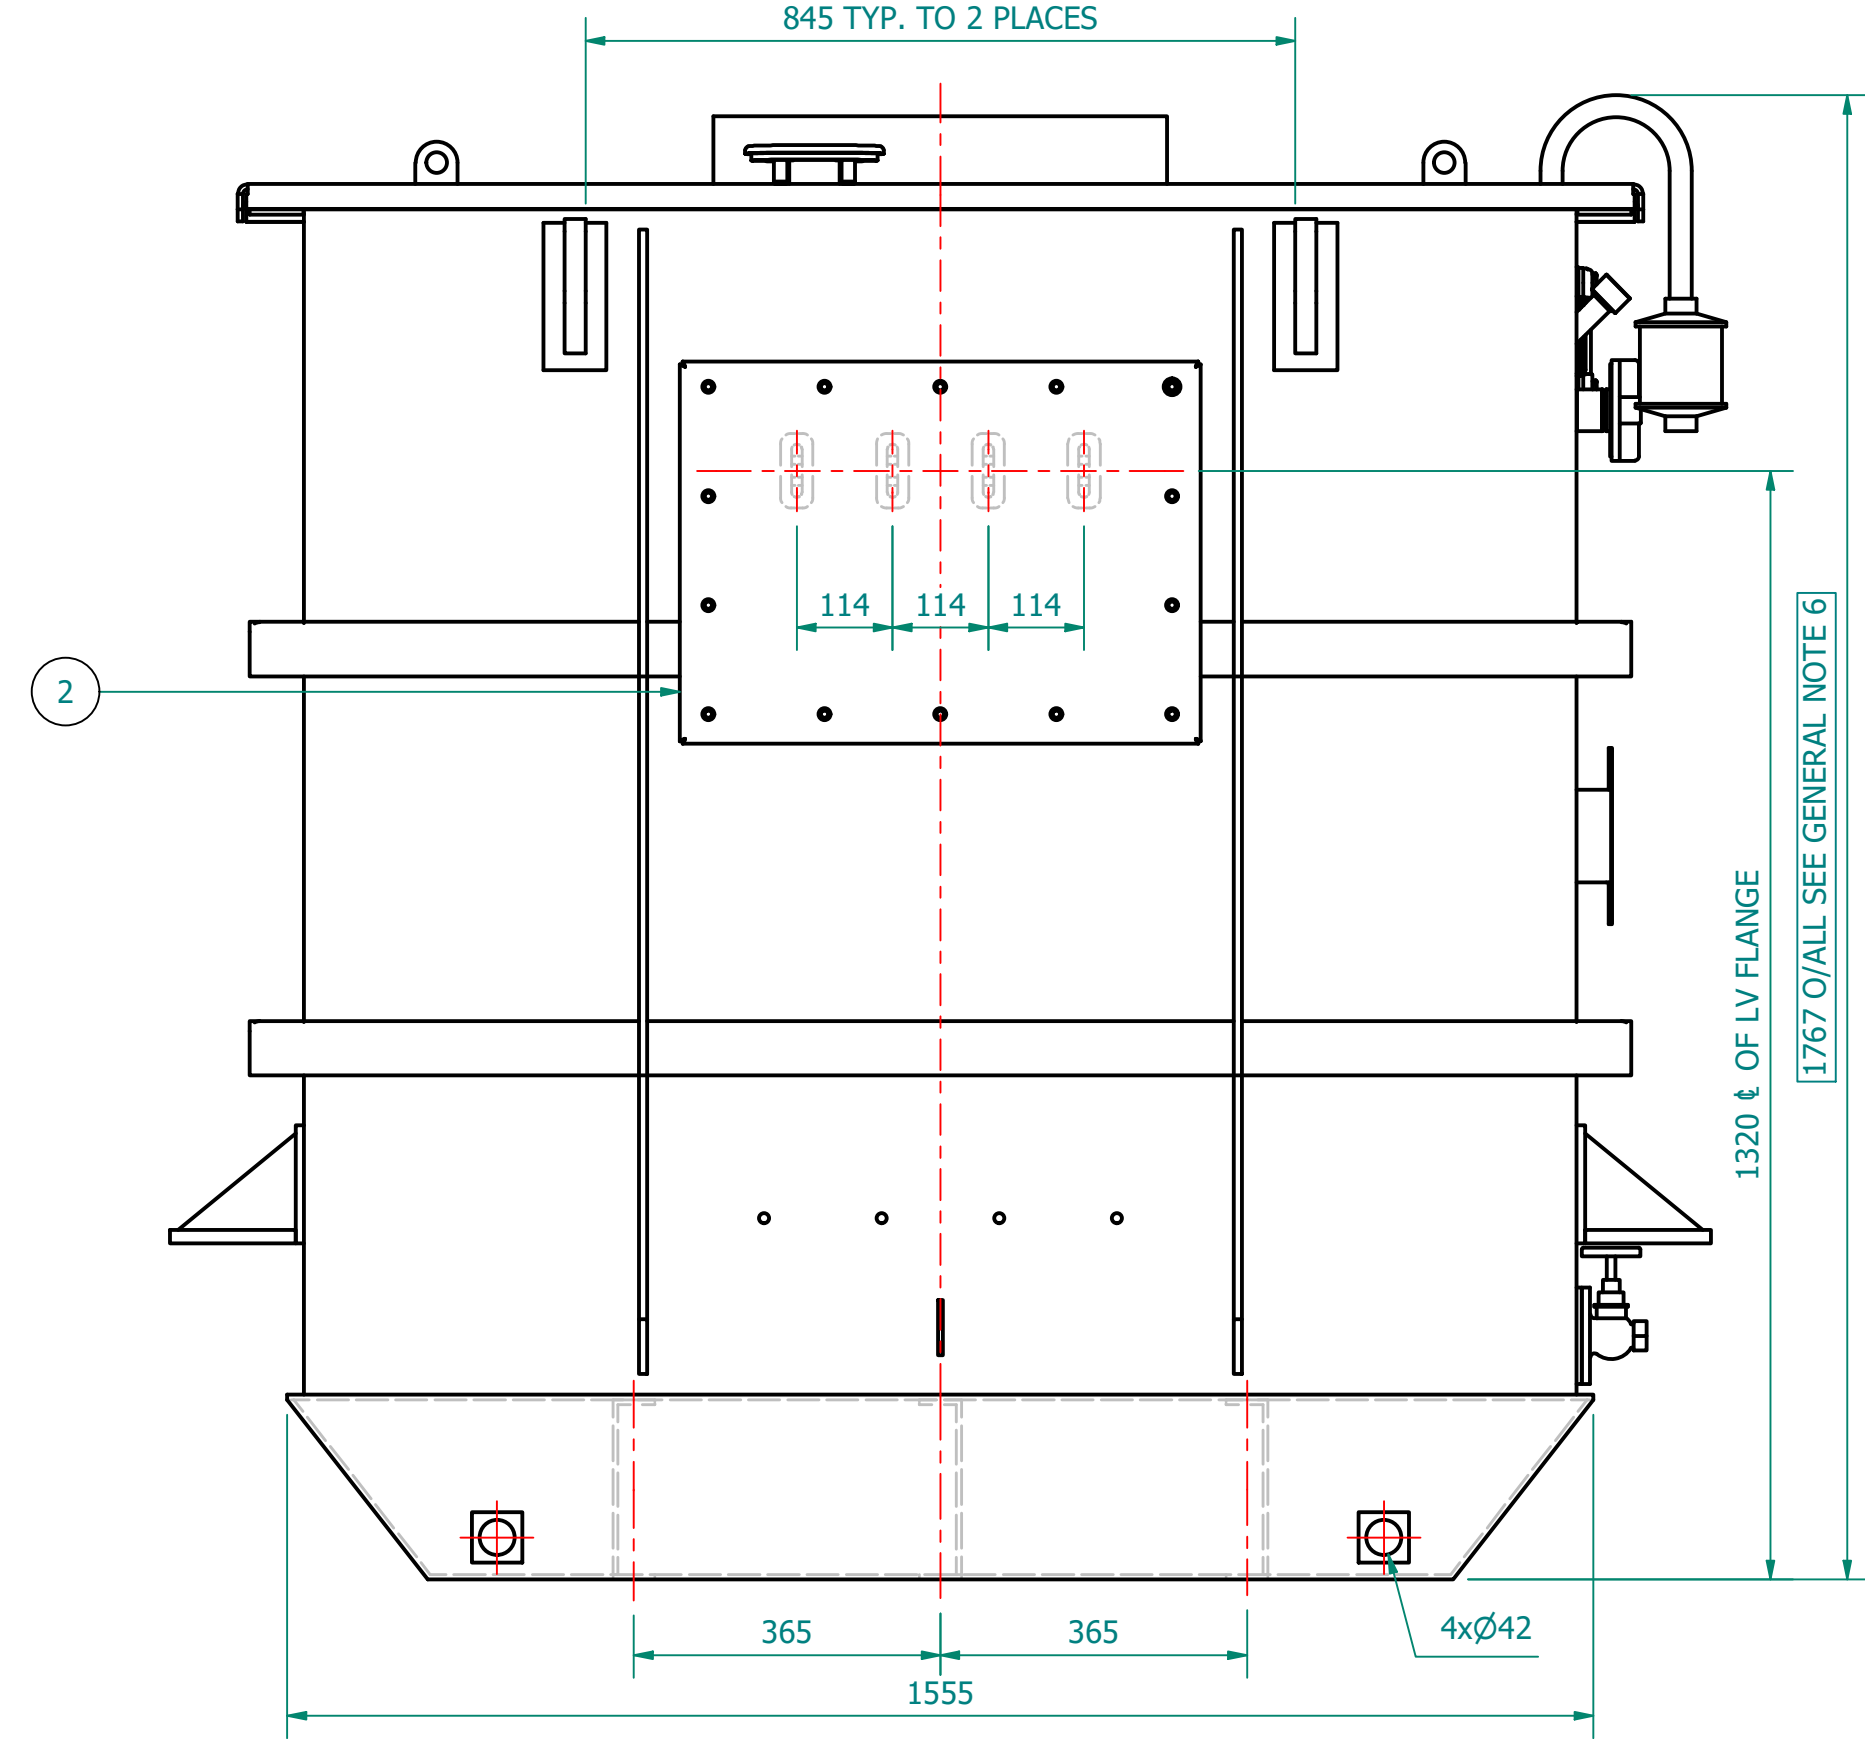


PLAN VIEW


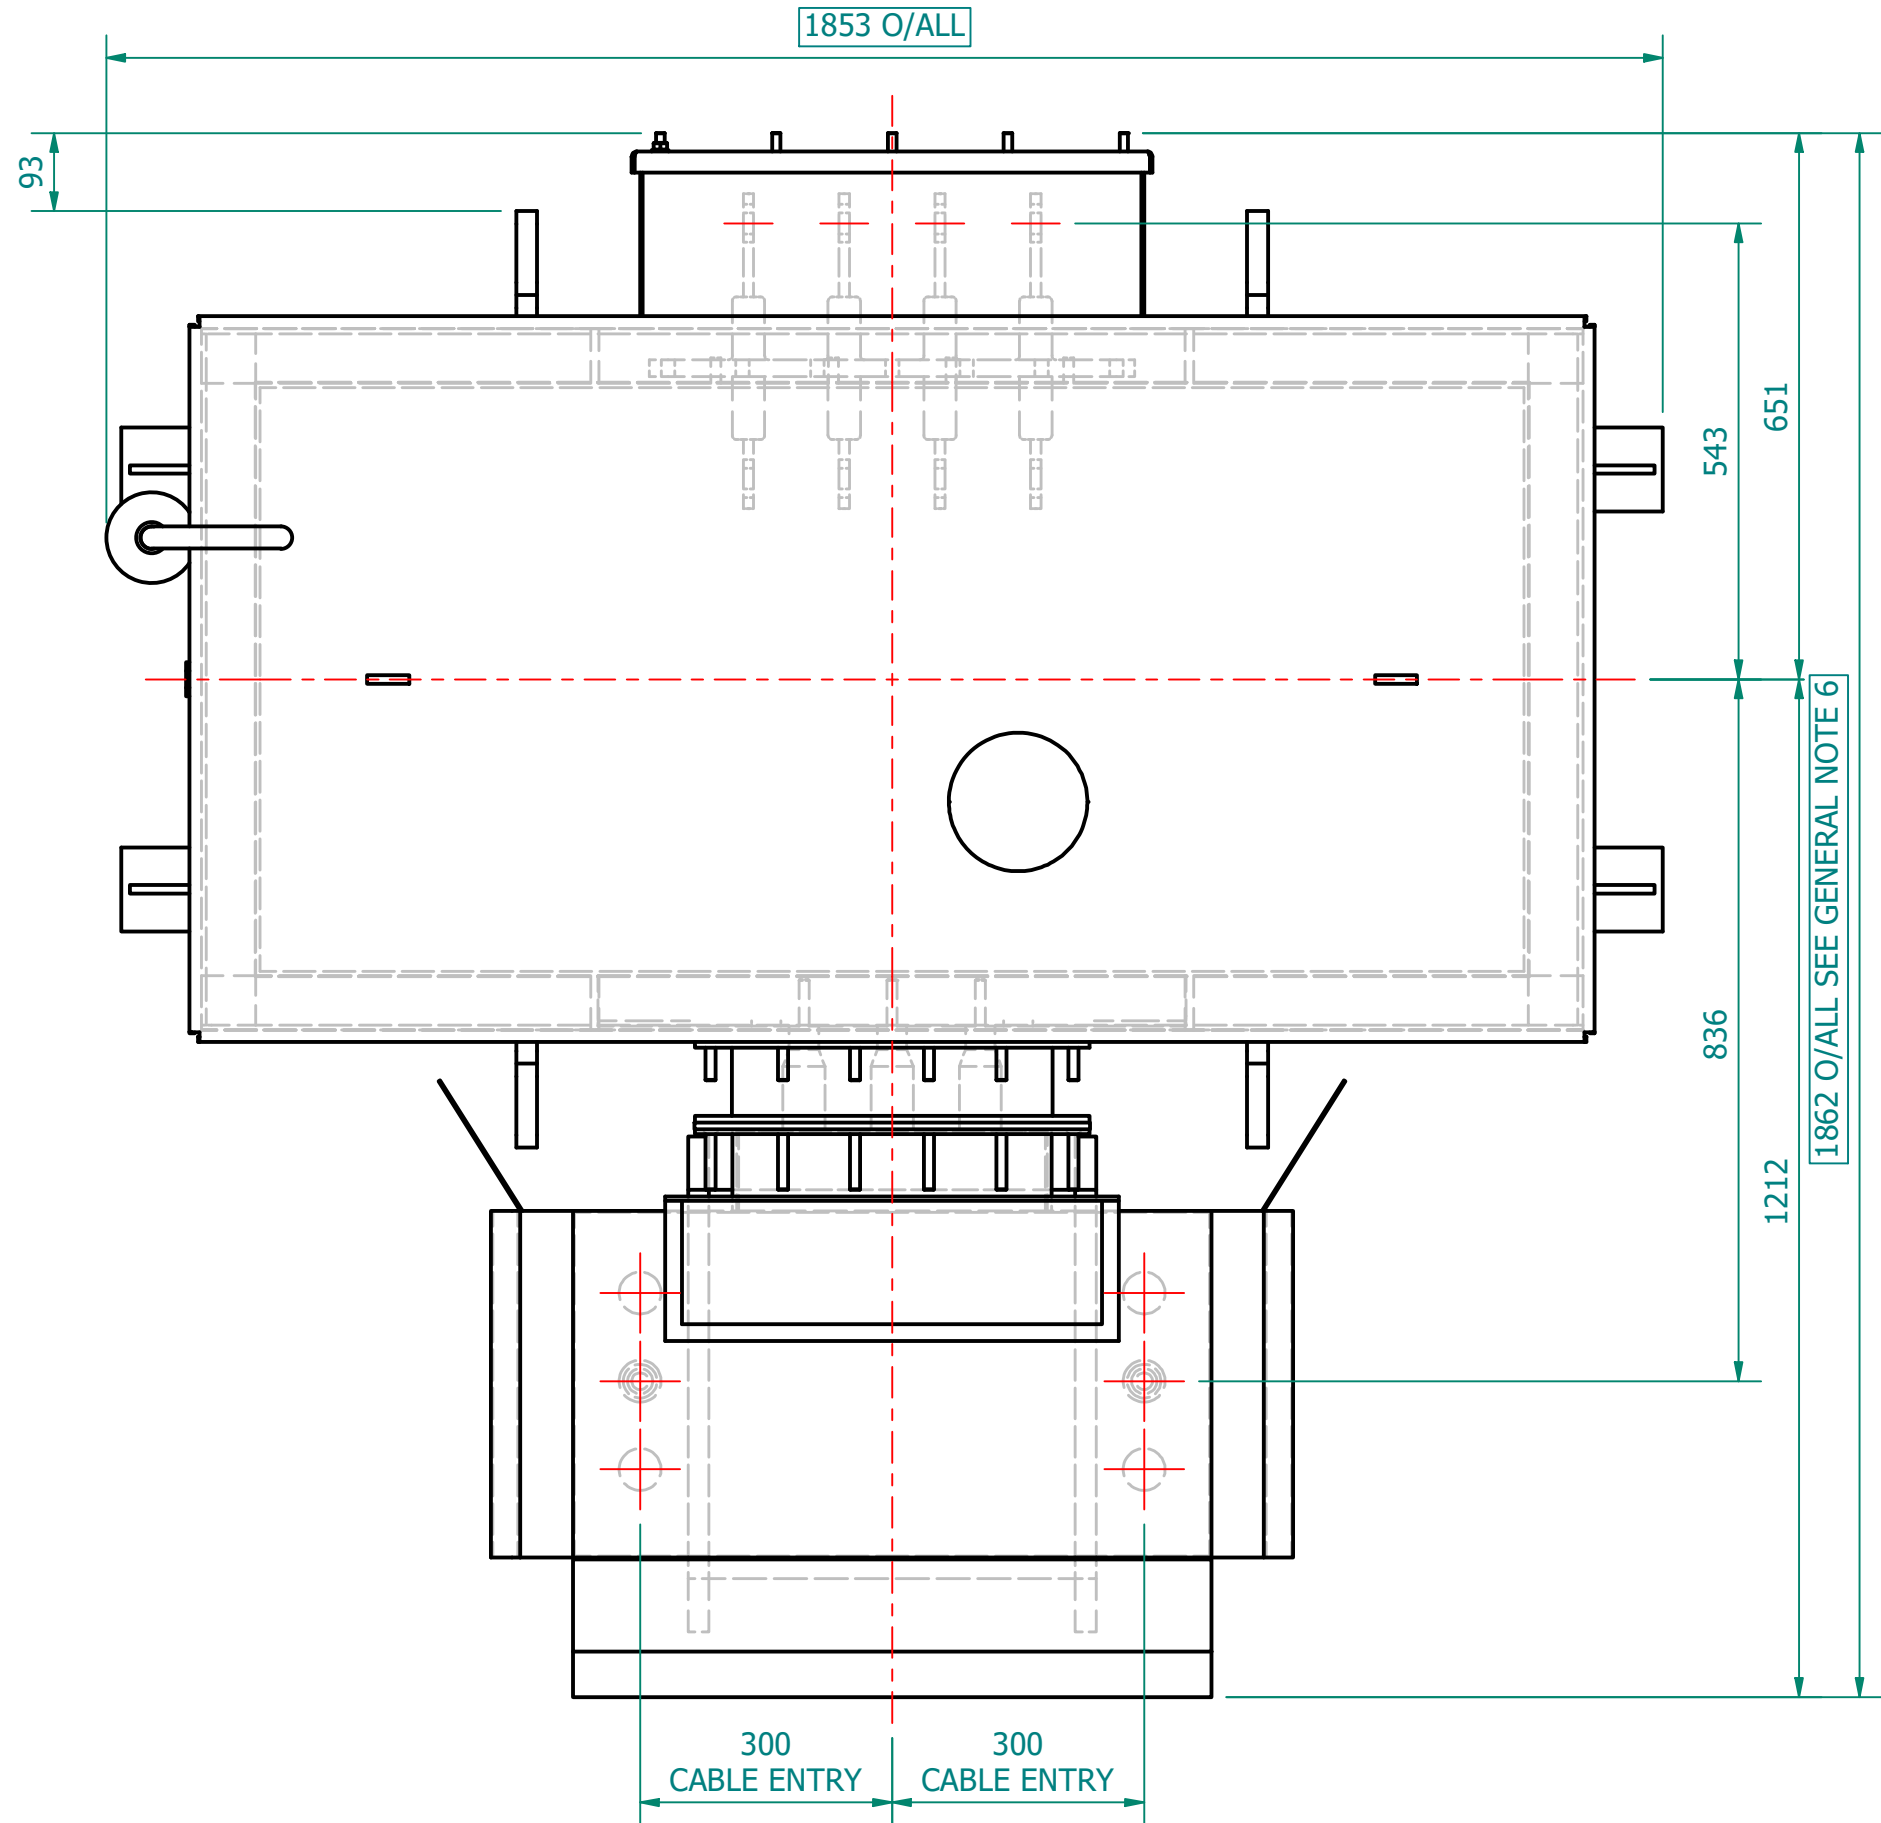


TRANSFORMER WEIGHT & VOLUME		
CORE AND WINDING	kg	1950
TANK AND FITTING	kg	690
COOLING LIQUID VOLUME	L	897
COOLING LIQUID WEIGHT	kg	870
TOTAL TX WEIGHT	kg	3510
ADDITIONS TO THE TRANSFORMER WEIGHT		
HV UNIT	kg	385

VIEW OF LV SIDE - CABLE CLEAT STUDS
CABLES MUST BE SUPPORTED IN ACCORDANCE WITH -
CURRENT IET Wiring Regulations BS7671 & IEC 61914

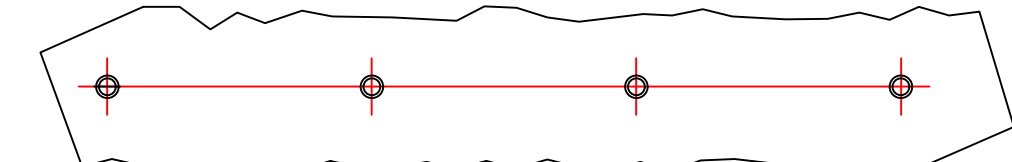

ESSENTIAL LABELS

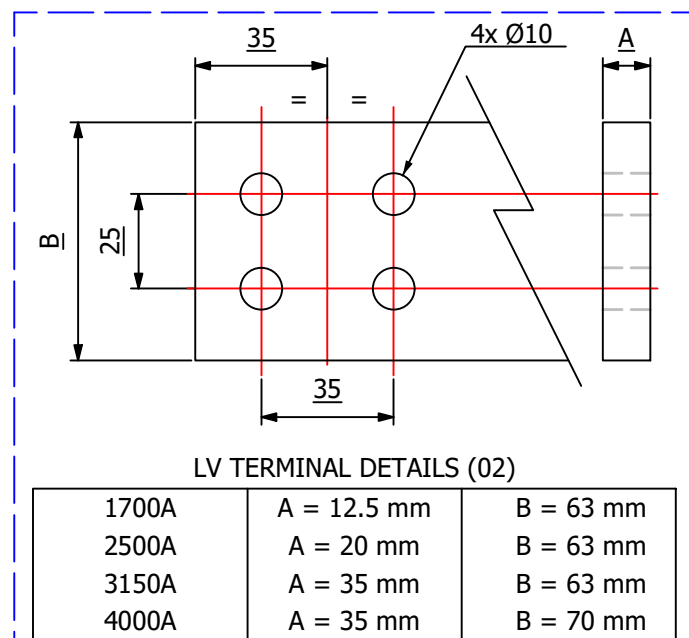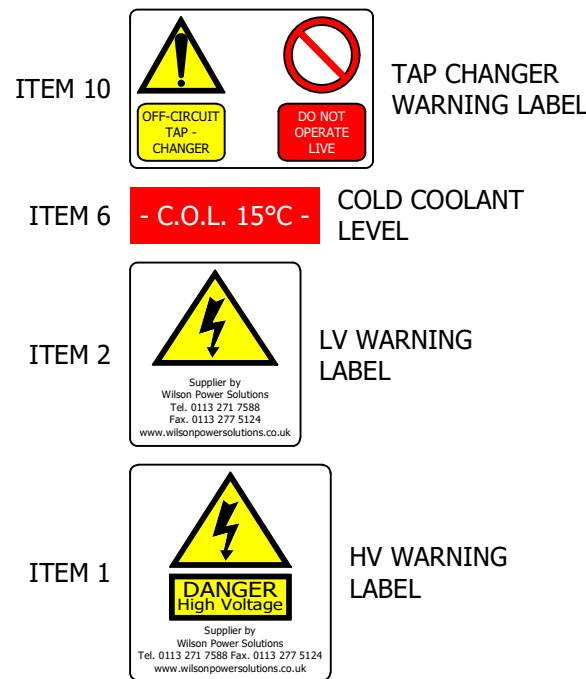

500KVA ELECTRICAL RATINGS					
No Load Voltage Ratio at Normal Tap	HV Tappings	Vector Group	Frequency	Full-Load Current at Normal Tap	
				HV Side	LV Side
11000 / 415V	+7.5 to -5.0% IN 2.5% INCREMENTS	Dyn11	50Hz	26.243A	695.603A
Design Impedance at Normal Tap	No Load Losses at rated Voltage & Frequency	Full Load Losses at rated Current & at 75°C Temp.	Temp. Rise above Ambient 40°C		
			in Oil by Therm.	in Wdg. by Res.	
4.75%	295W	2750W	60°C	65°C	
GENERAL NOTES					
1	ALL DIMENSIONS ARE IN 'mm'.				
2	ALL DIMENSIONS/WEIGHTS ARE SUBJECT TO ± 10% TOLERANCE.				
3	ELECTRONIC SCALE - 1:1 (ONLY WRITTEN DIMENSIONS TO BE FOLLOWED).				
4	TOLERANCE ON IMPEDANCE PER IEC:60076.				
5	PAINT SHADE.: 632 As PER BS:381C (SEMI GLOSS) TO ISO12944 - MIN C4H SPEC.				
6	O/ALL DIMS ARE SUBJECT TO EQUIPMENT DOOR OPENING DISTANCES.				
7					
8					
9					

ITEM	QTY	DESCRIPTION
15	1	HV THROAT
14	1	DRAIN VALVE (25NB) with MALE PLUG
13	4	JACKING PADS
12	4	TRANSFORMER LIFTING LUGS
11	1	RATING & DIAGRAM PLATE (SS)
10	1	OFF-CIRCUIT TAP SWITCH (6-Position & Padlockable)
9	2	THERMOMETER POCKET (3/4" BSP MALE THREAD)
8	1	OIL FILLING PIPE WITH FLANGED COVER
7	1	TOP COVER with LIFTING LUGS (x2)
6	1	OIL LEVEL GAUGE (with 15°) COLD OIL LEVEL MARK
5	1	ENVIRO GEL BREATHING TYPE R
4	2	EARTHING TERMINAL (FLAT TYPE suitable for M12 Bolt)
3	1	TRANSFORMER BASE (SKID TYPE) c/w HAULAGE HOLES & BRACING
2	1	LV CABLE BOX - 1.1kV, 4-POLE, AIR INSULATION, (FACING-'F', BS:2562) SUITABLE FOR 1 x 1c CABLES PER PHASE & N - MAX. 630mm.sq
1	1	HV RMU - 11kV, 200A, GCB, 630A BUS [Schneider RN2d-T1/21] TLF PROTECTION, (FACING-'F' BS:2562)

IF IN DOUBT - ASK. REMOVE ALL SHARP EDGES. DO NOT SCALE. DRAWING NOT TO SCALE

REVISION HISTORY				DESCRIPTION
REV	REV BY	VERIFIED	APPROVED	

CURRENT REVISION	REVISION DESCRIPTION		REV	PROJECT	
	ORIGINAL			CUSTOMER	
			S.O. NUMBER		
			DATE		
	REV. BY: SATHWIK		24-MAR-2026	P.O. NUMBER	
	VERIFIED:			W.O. NUMBER	
APPROVED:					

DRAWING TITLE
GENERAL ARRANGEMENT DRAWING FOR
500kVA WILSON e4 AMORPHOUS ULTIMATE LOW LOSS
11000/415V, 50Hz, Dyn11, KNAN
AL WOUND DISTRIBUTION TRANSFORMER
RN2d

DRAWN BY:
SATHWIK
DATE:
24-03-2026
DRAWING NO.:

WILSON POWER SOLUTIONS
Westland Square, Leeds
West Yorkshire LS11 5SS, United Kingdom
Tel: +44 (0) 113 271 7588
Fax: +44 (0) 113 277 5124
web: www.wilsonpowersolutions.co.uk email: info@wilsonpowersolutions.co.uk
WPS-E4-500-AL-A002-KNAN
SHEET 1 OF 1