
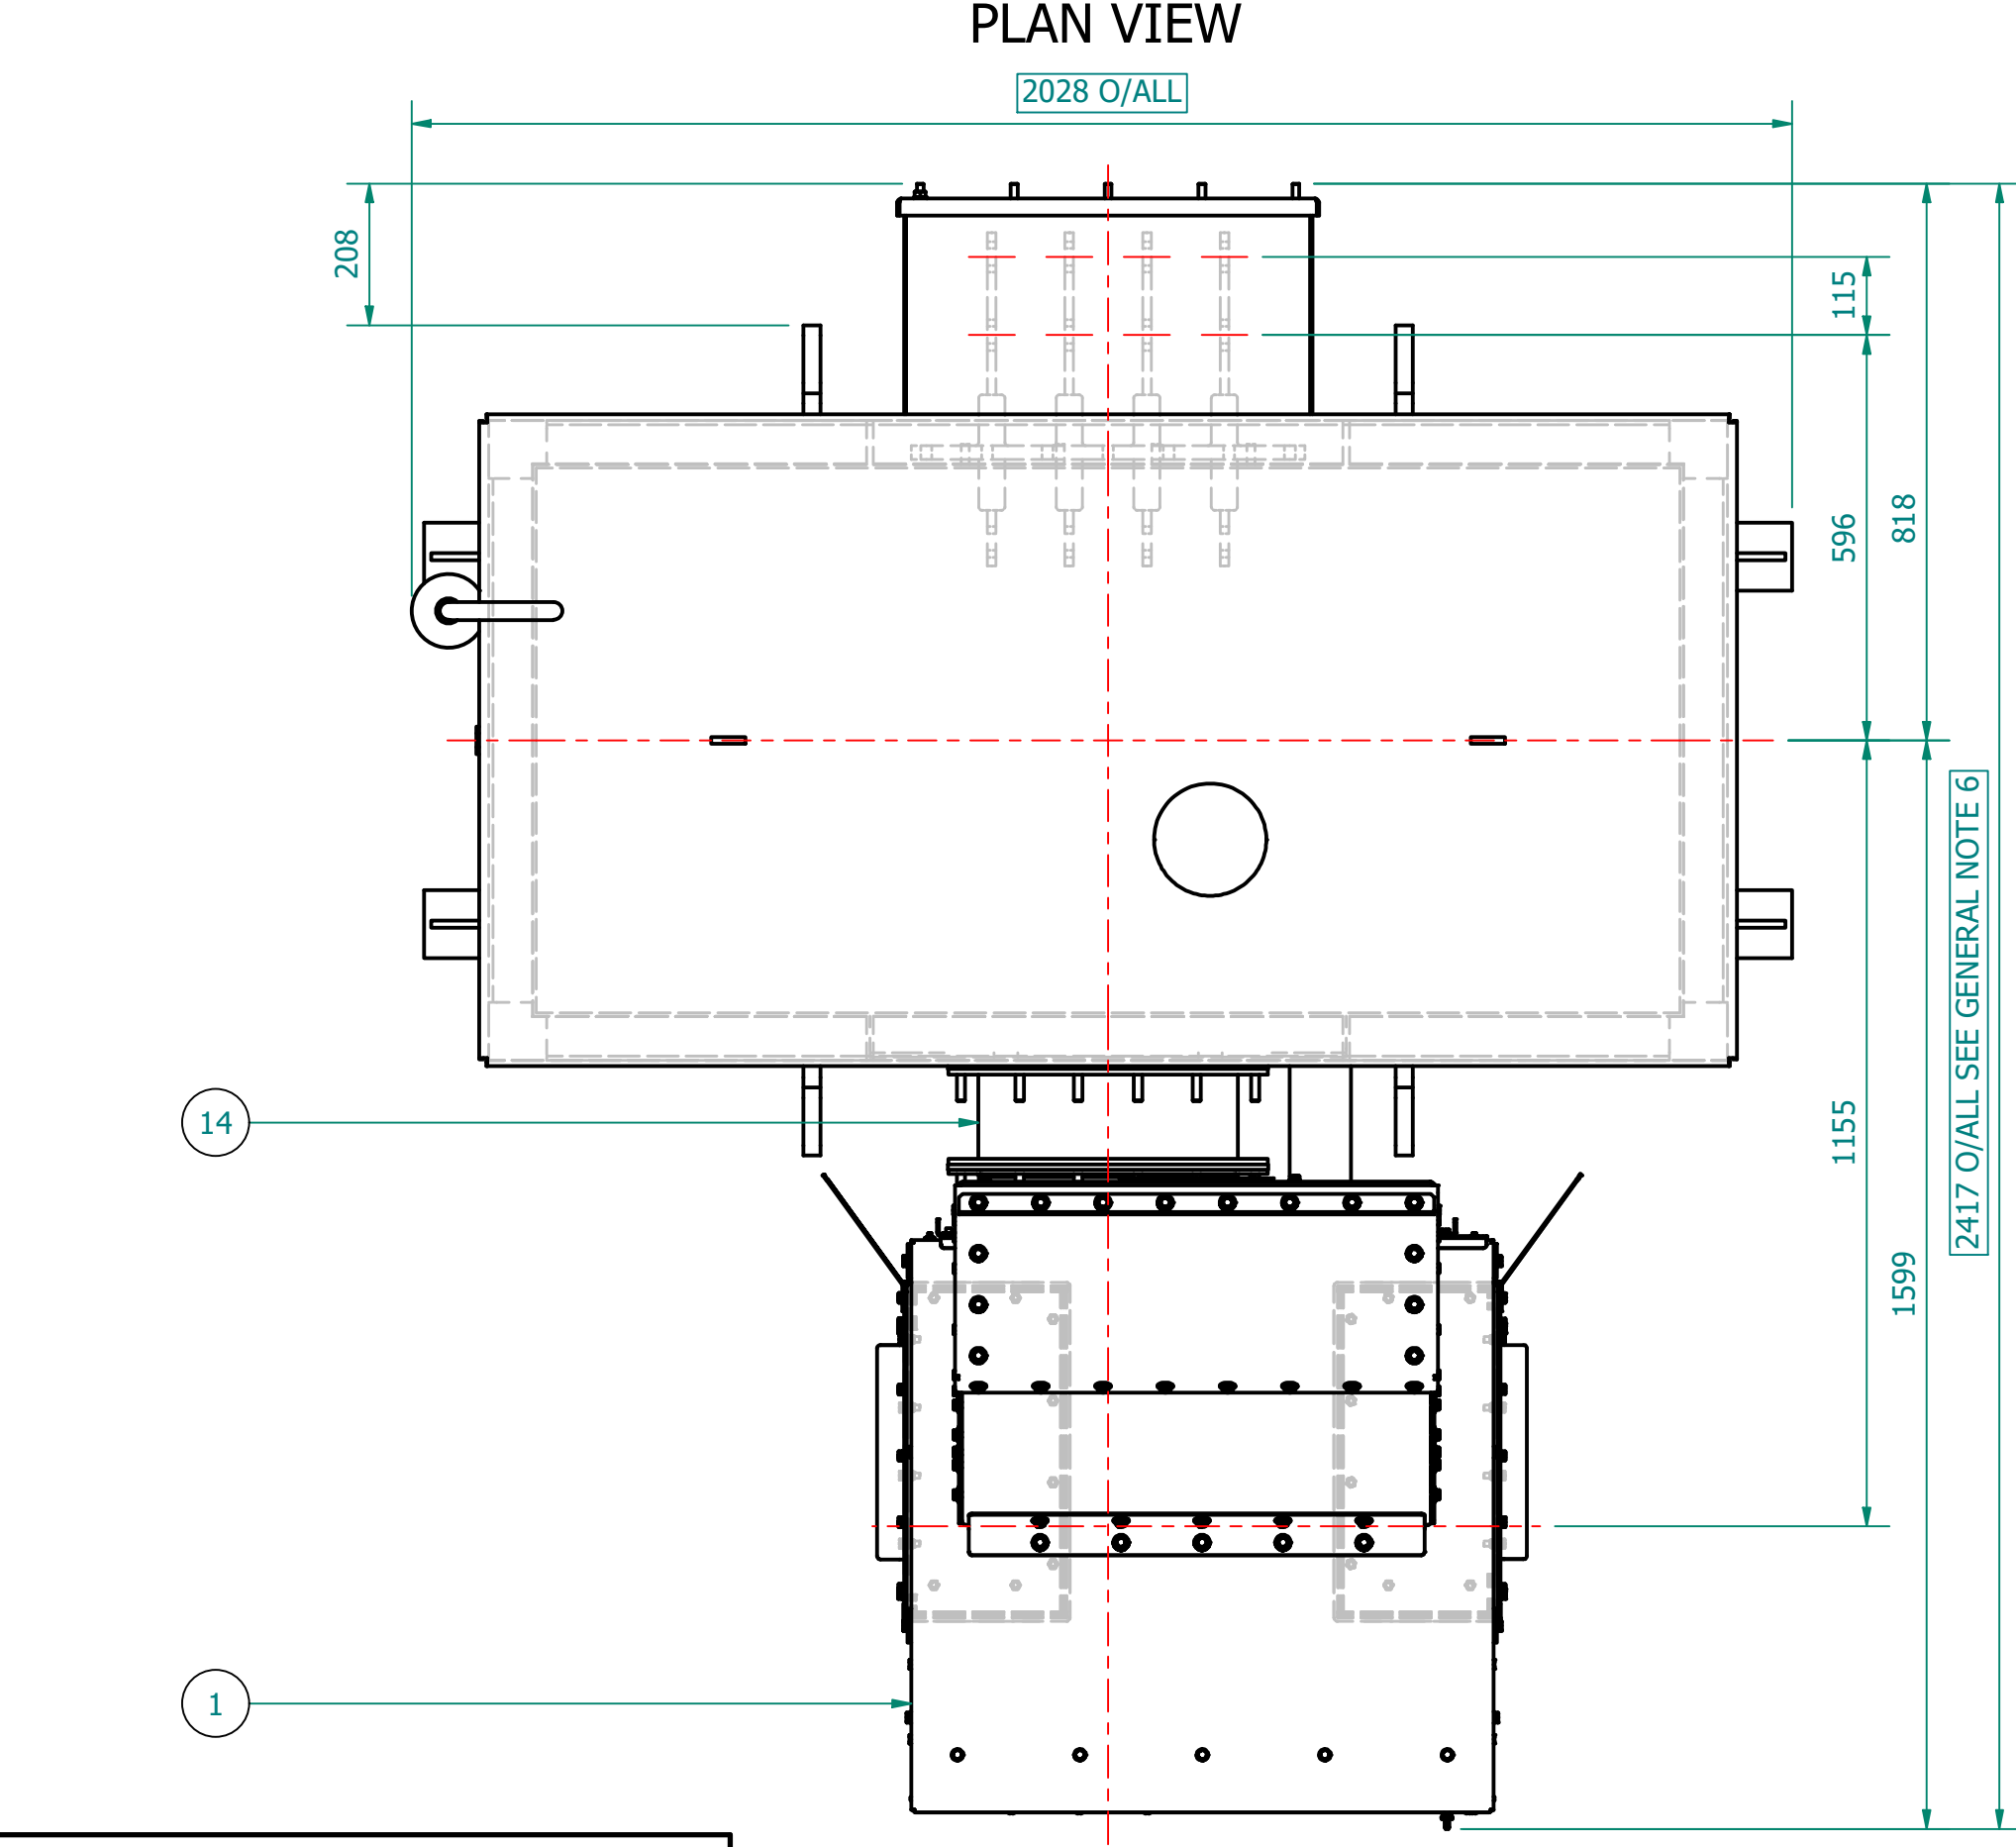
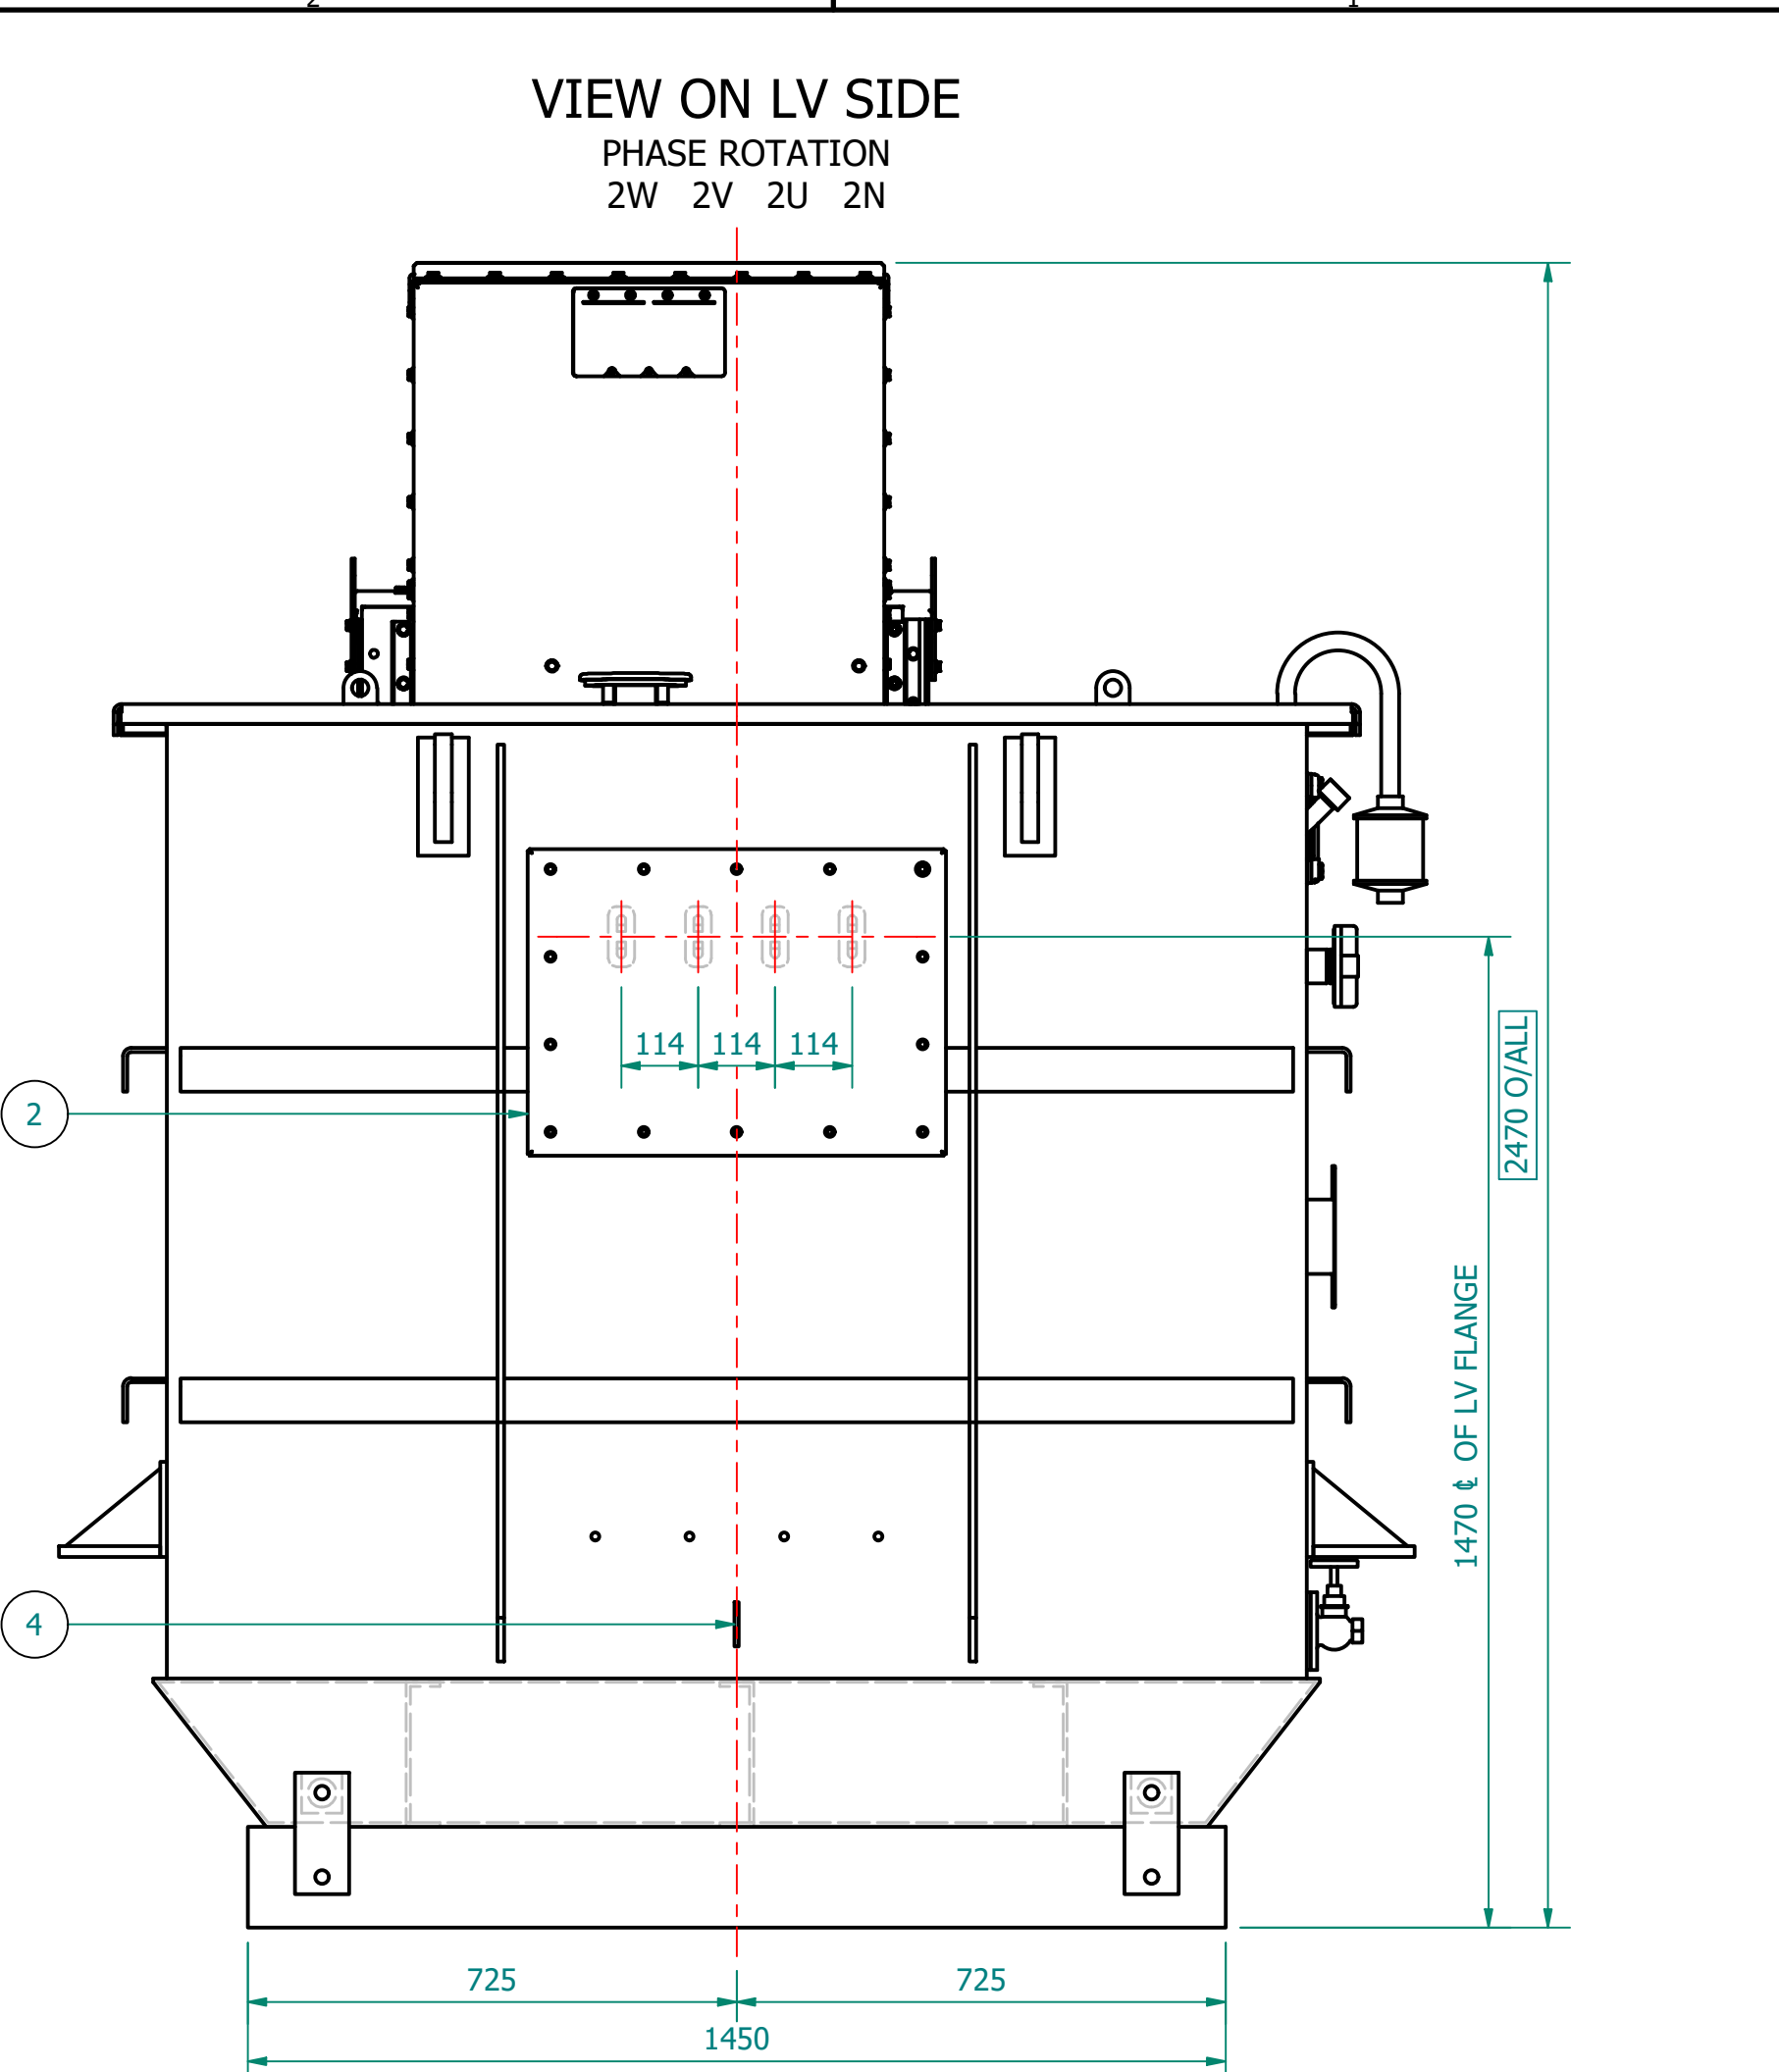
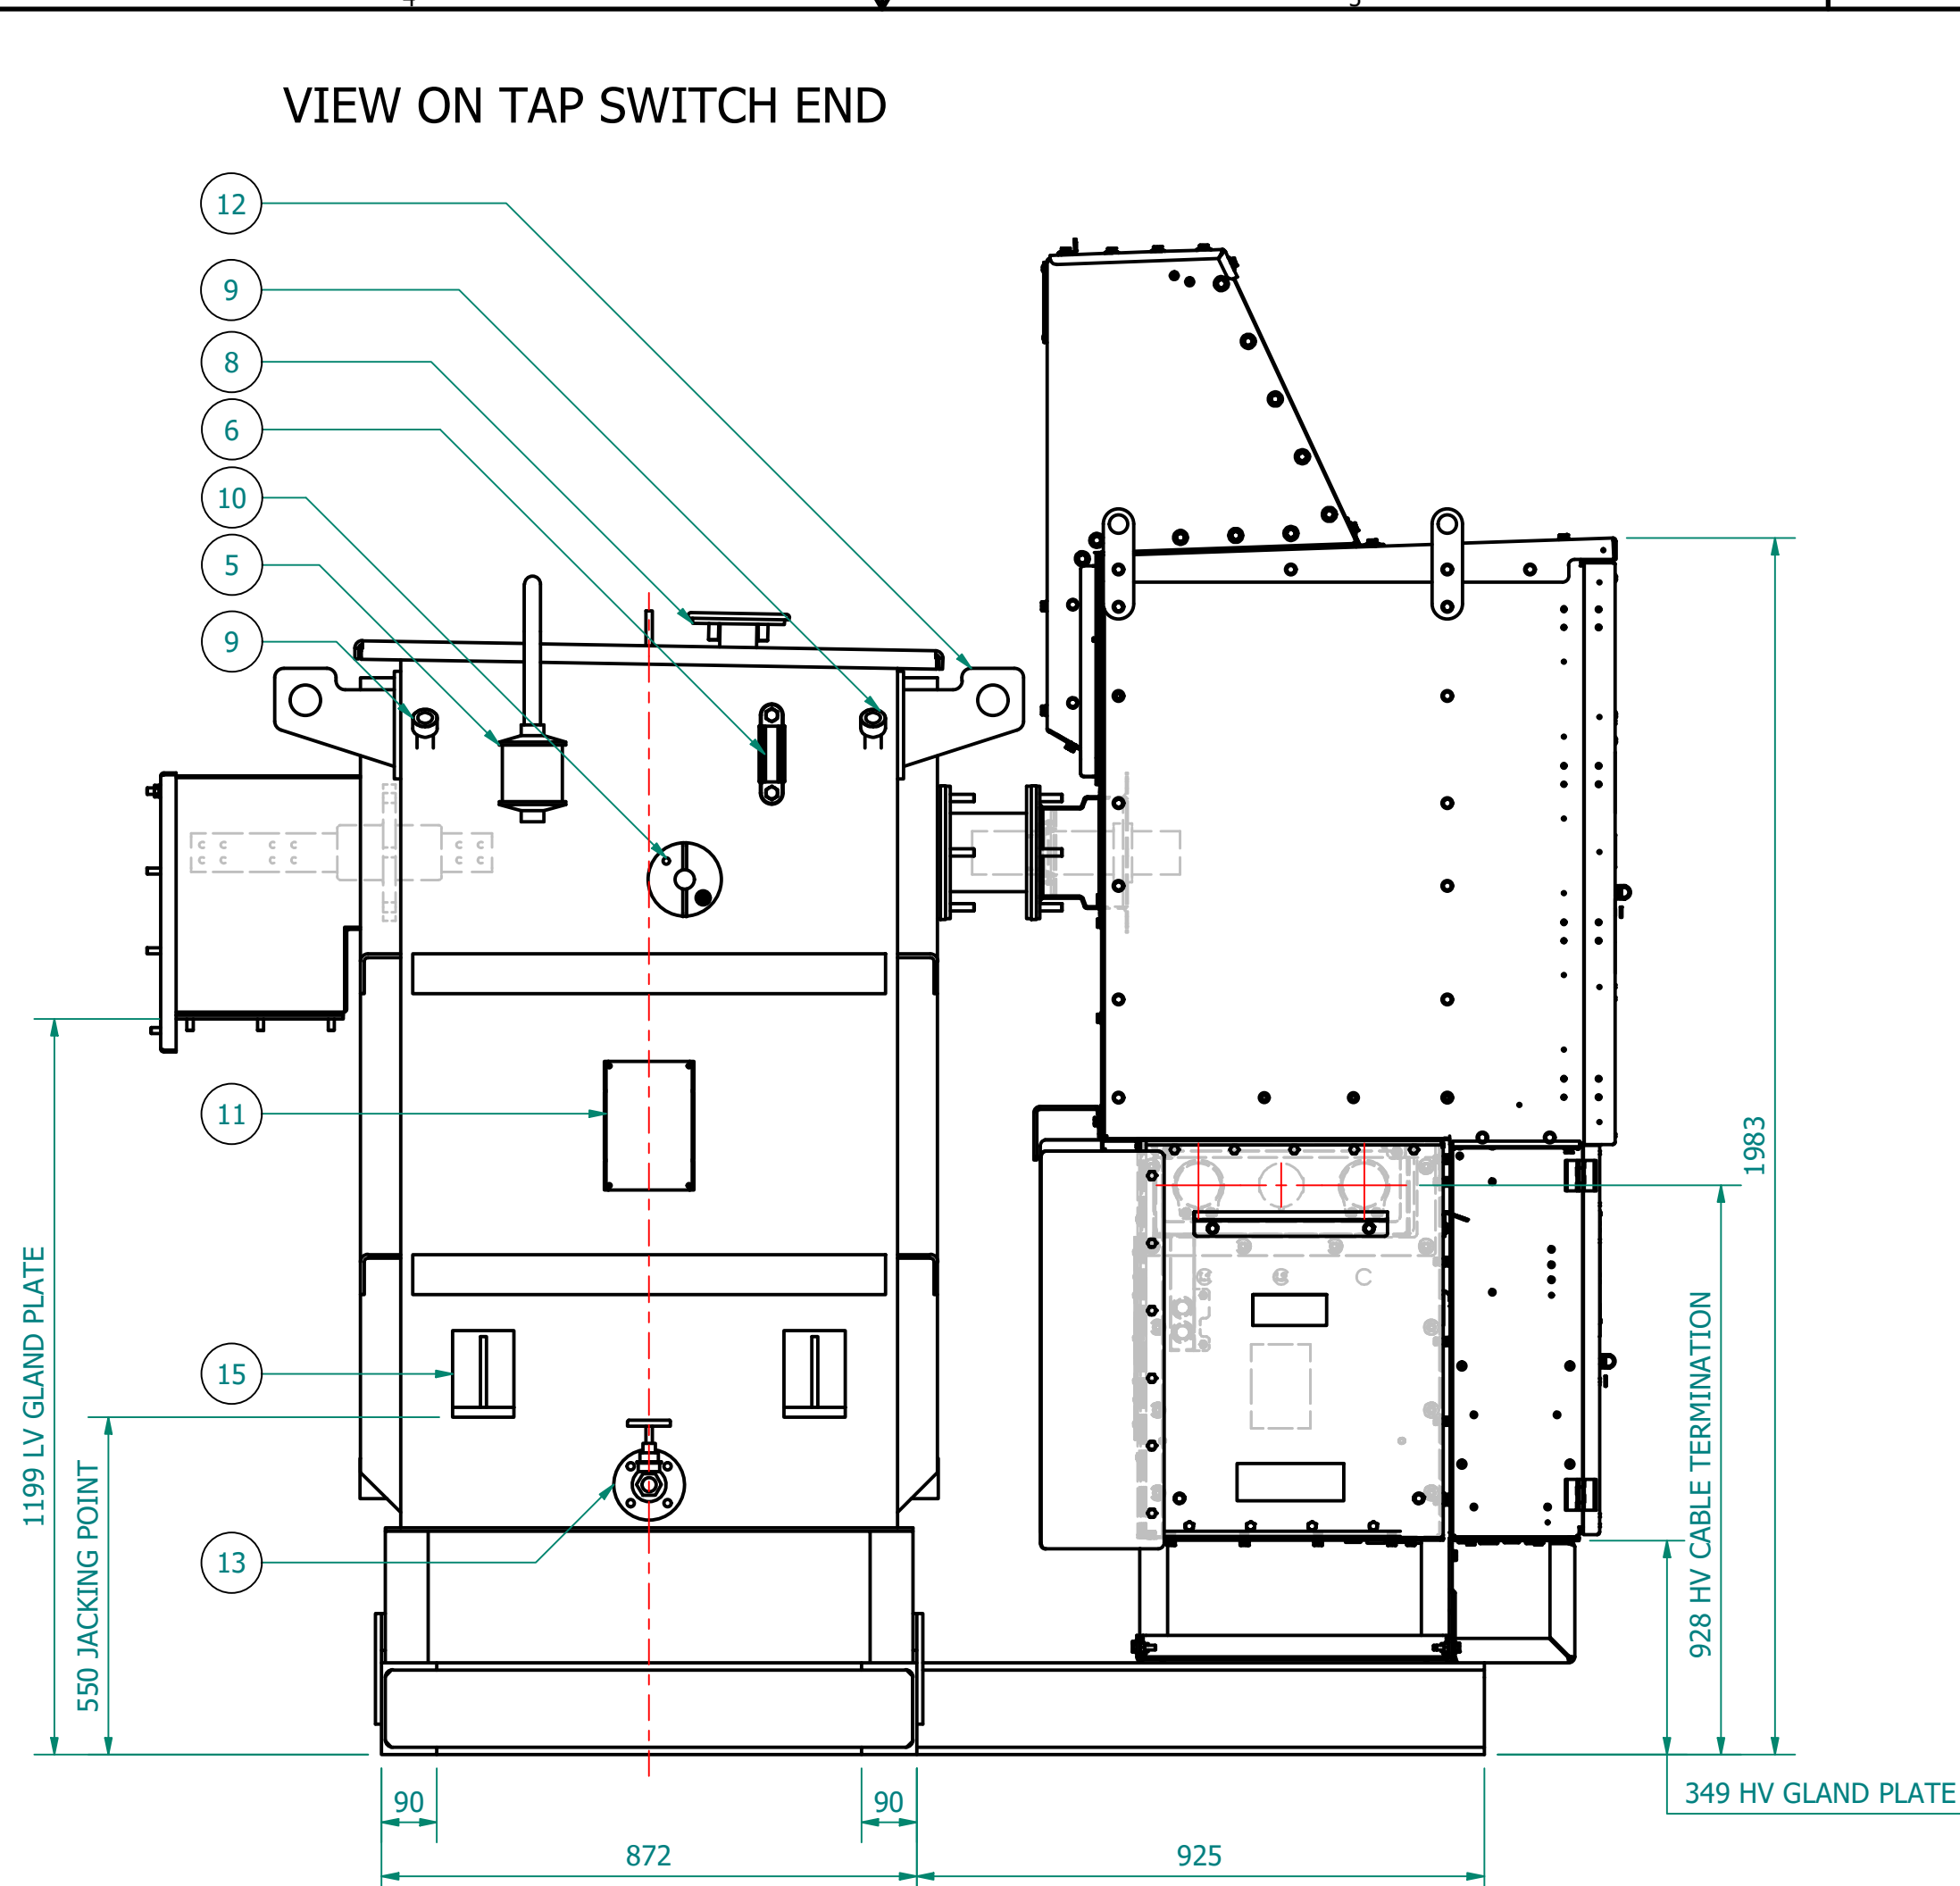


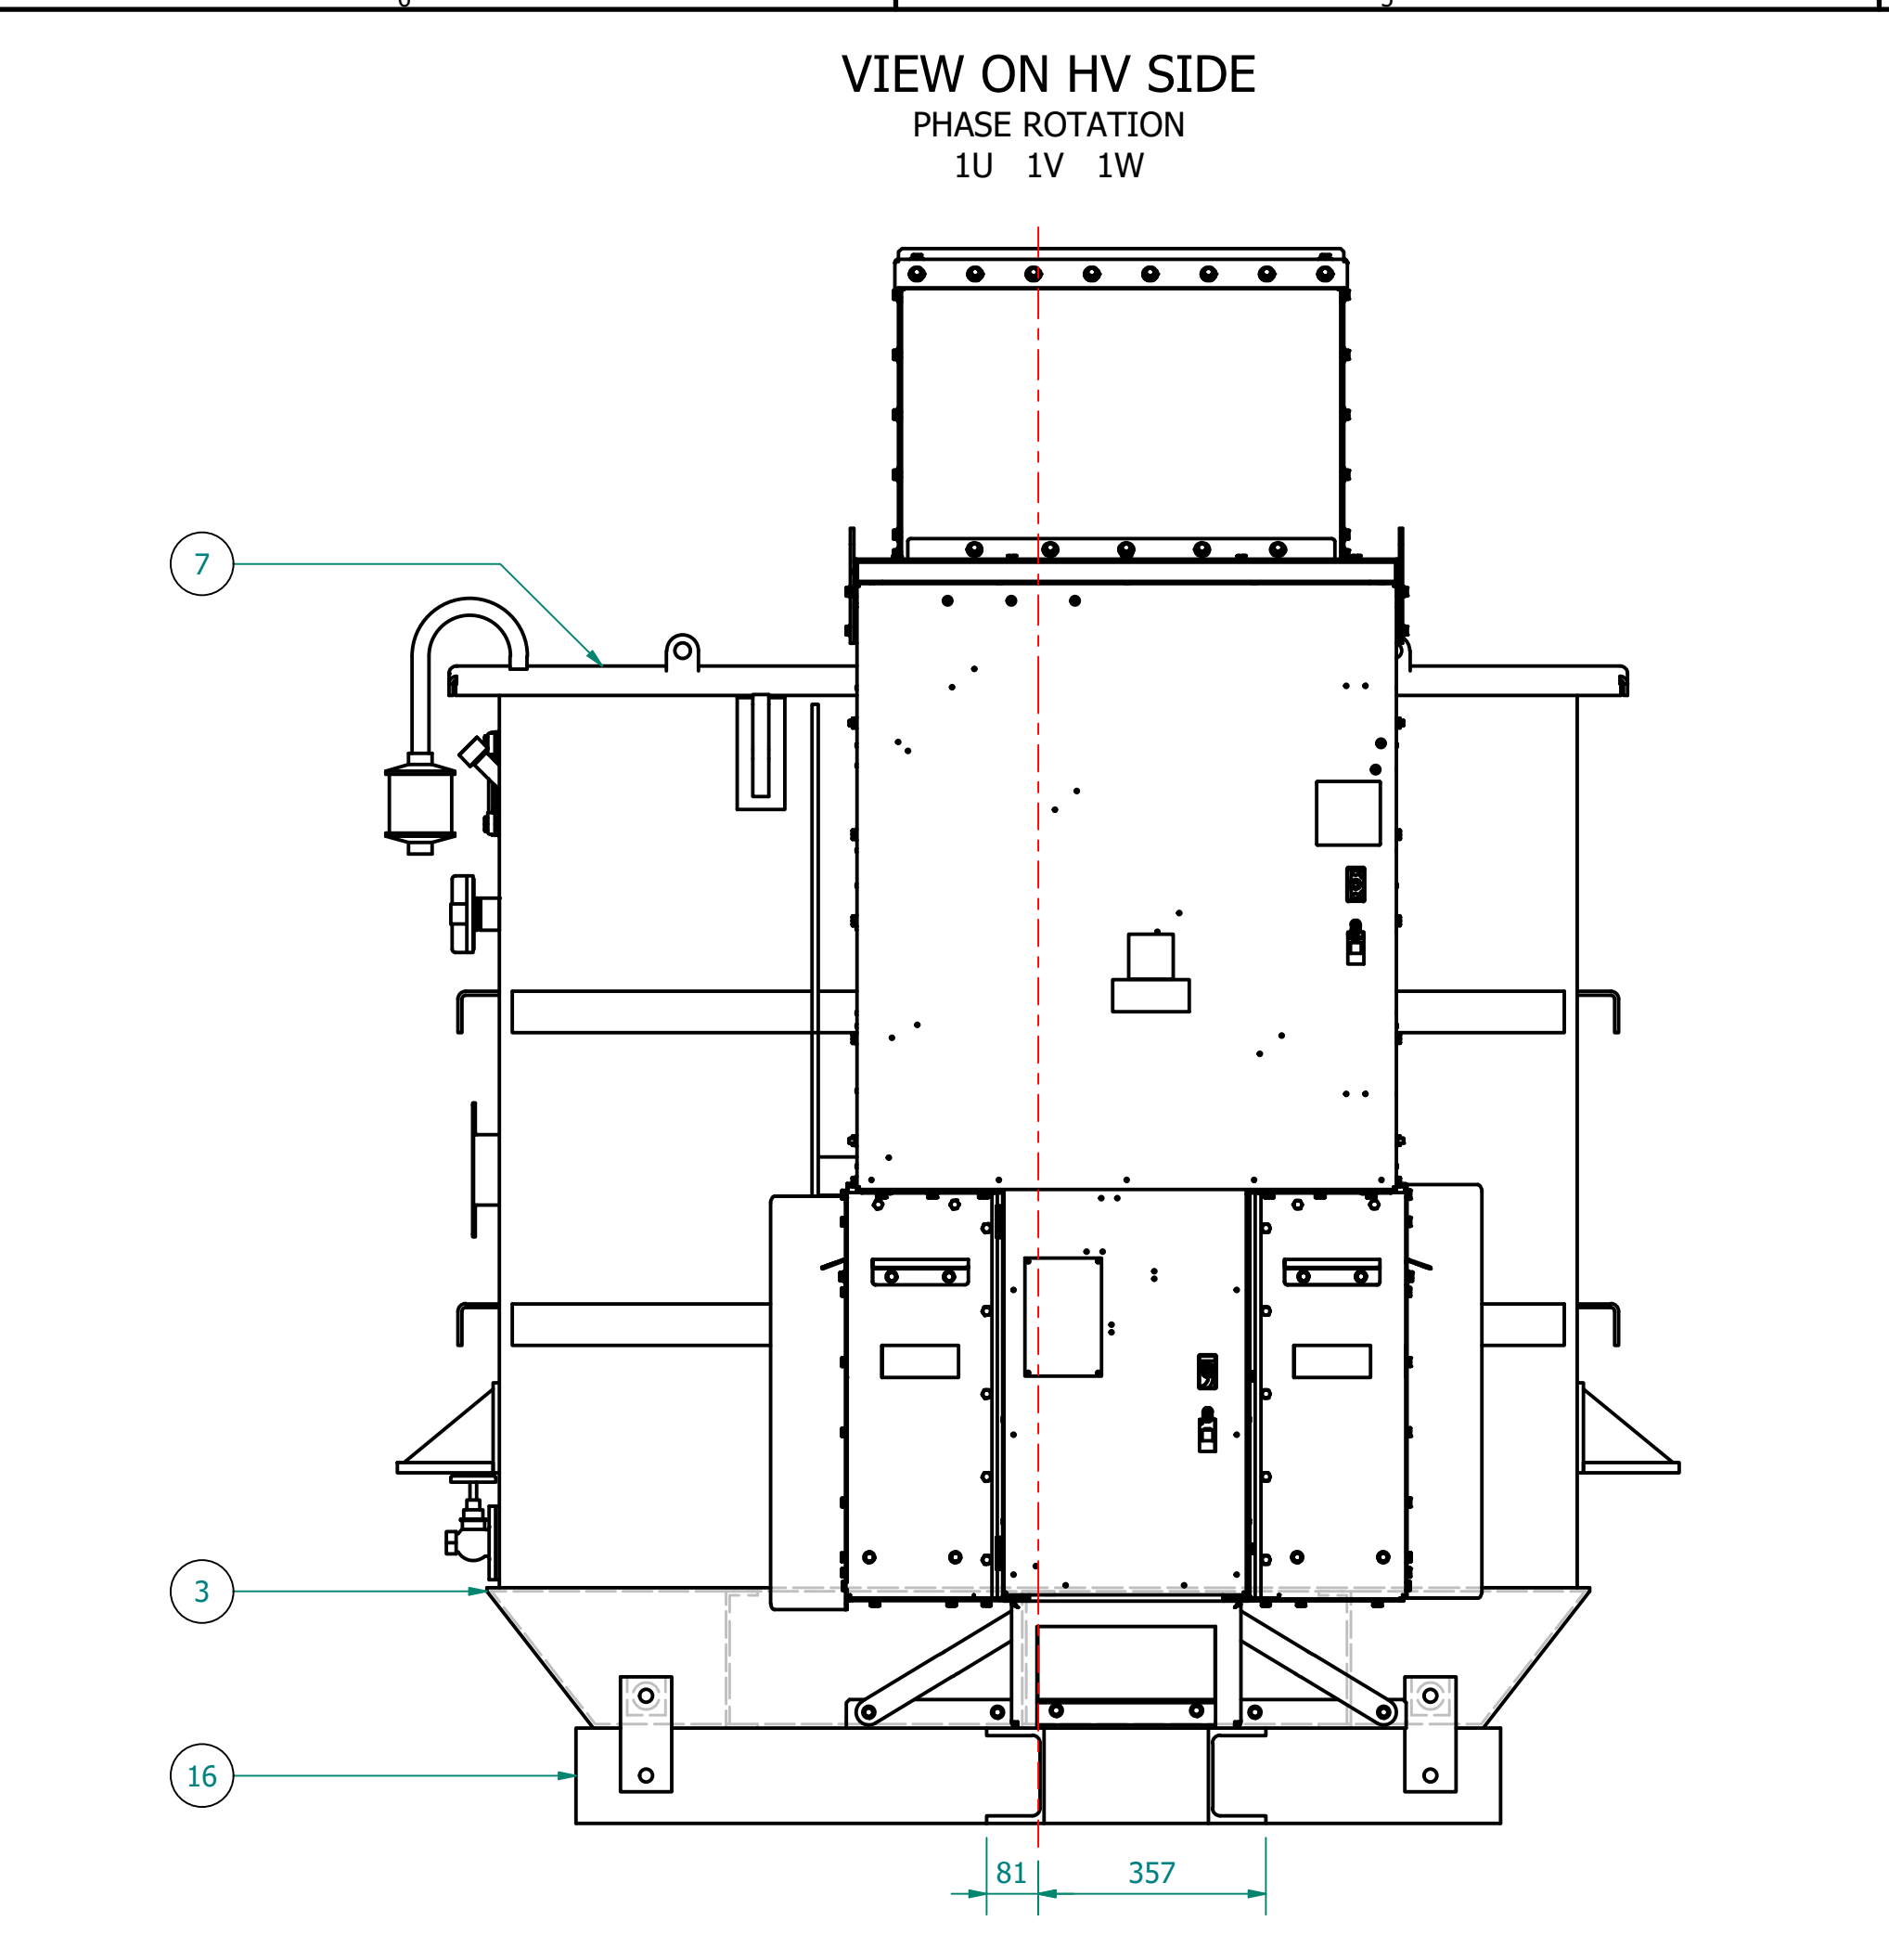

TRANSFORMER WEIGHT & VOLUME		
CORE AND WINDING	kg	2640
TANK AND FITTING	kg	800
COOLING LIQUID VOLUME	L	1155
COOLING LIQUID WEIGHT	kg	940
TOTAL TX WEIGHT	kg	4380
ADDITIONS TO THE TRANSFORMER WEIGHT		
HV UNIT	kg	650
SUPPORT FRAME	kg	--

VIEW OF LV SIDE - CABLE CLEAT STUDS
CABLES MUST BE SUPPORTED IN ACCORDANCE WITH -
CURRENT IET Wiring Regulations BS7671 & IEC 61914

4x M12 x 30 @ 140mm PITCH ~430mm FROM THE GROUND

ESSENTIAL LABELS

ITEM 10 TAP CHANGER WARNING LABEL

ITEM 6 COLD COOLANT LEVEL

ITEM 2 LV WARNING LABEL

ITEM 1 HV WARNING LABEL

LV TERMINAL DETAILS (02)

1700A	A = 12.5 mm	B = 63 mm
2500A	A = 20 mm	B = 63 mm
3150A	A = 35 mm	B = 63 mm
4000A	A = 35 mm	B = 70 mm

800KVA ELECTRICAL RATINGS					
No Load Voltage Ratio at Normal Tap	HV Tappings	Vector Group	Frequency	Full-Load Current at Normal Tap	
				HV Side	LV Side
11000 / 415V	+7.5 to -5.0% IN 2.5% INCREMENTS	Dyn11	50Hz	41.989A	1112.964A
Design Impedance at Normal Tap	No Load Losses at rated Voltage & Frequency	Full Load Losses at rated Current & at 75°C Temp.	Temp. Rise above Ambient 40°C		
			in Oil by Therm.		in Wdg. by Res.
4.75%	425W	4265W	60°C	65°C	
GENERAL NOTES					
1	ALL DIMENSIONS ARE IN 'mm'.				
2	ALL DIMENSIONS/WEIGHTS ARE SUBJECT TO ± 10% TOLERANCE.				
3	ELECTRONIC SCALE - 1:1 (ONLY WRITTEN DIMENSIONS TO BE FOLLOWED).				
4	TOLERANCE ON IMPEDANCE PER IEC:60076.				
5	PAINT SHADE.: 632 As PER BS:381C (SEMI GLOSS) TO ISO12944 - MIN C4H SPEC.				
6	O/ALL DIMS ARE SUBJECT TO EQUIPMENT DOOR OPENING DISTANCES.				
7					
8					
9					

ITEM	QTY	DESCRIPTION
16	1	HV SUPPORT FRAME
15	4	JACKING PADS
14	1	HV THROAT
13	1	DRAIN VALVE (25NB) with MALE PLUG
12	4	TRANSFORMER LIFTING LUGS
11	1	RATING & DIAGRAM PLATE (SS)
10	1	OFF-CIRCUIT TAP SWITCH (6-Position & Padlockable)
9	2	THERMOMETER POCKET (3/4" BSP MALE THREAD)
8	1	OIL FILLING PIPE WITH FLANGED COVER
7	1	TOP COVER with LIFTING LUGS (x2)
6	1	OIL LEVEL GAUGE (with 15°) COLD OIL LEVEL MARK
5	1	ENVIRO GEL BREATHER TYPE R
4	2	EARTHING TERMINAL (FLAT TYPE suitable for M12 Bolt)
3	1	TRANSFORMER BASE (SKID TYPE) c/w HAULAGE HOLES & BRACING
2	1	LV CABLE BOX - 1.1kV, 4-POLE, AIR INSULATION, (FACING-'F', BS:2562) SUITABLE FOR 2 x 1c CABLES PER PHASE & N - MAX. 630mm sq
1	1	HV RMU - 11kV, 200A, GCB, 630A BUS [Schneider RN2AIR], (FACING-'E' BS:2562)

IF IN DOUBT - ASK. REMOVE ALL SHARP EDGES. DO NOT SCALE. DRAWING NOT TO SCALE

	REVISION HISTORY				CURRENT REVISION	REVISION DESCRIPTION		REV 00	PROJECT		DRAWING TITLE		DRAWN BY: RAMESH J	 Westland Square, Leeds, West Yorkshire LS11 5SS, United Kingdom Tel: +44 (0) 113 271 7588 Fax: +44 (0) 113 277 5124 web: www.wilsonpowersolutions.co.uk email: info@wilsonpowersolutions.co.uk		
	REV	REV BY	VERIFIED	APPROVED		ORIGINAL			CUSTOMER		GENERAL ARRANGEMENT DRAWING FOR 800kVA WILSON e4 AMORPHOUS ULTIMATE LOW LOSS 11000/415V, 50Hz, Dyn11, ONAN AL WOUND DISTRIBUTION TRANSFORMER AIRSET					
						REV. BY: RAMESH J			S.O. NUMBER		P.O. NUMBER					
						VERIFIED:			DATE 22-MAY-2026		W.O. NUMBER					
				DESCRIPTION									DATE: 22/05/2026	WPS-E4-800-AL-AIRSET		
														SHEET 1 OF 1		