

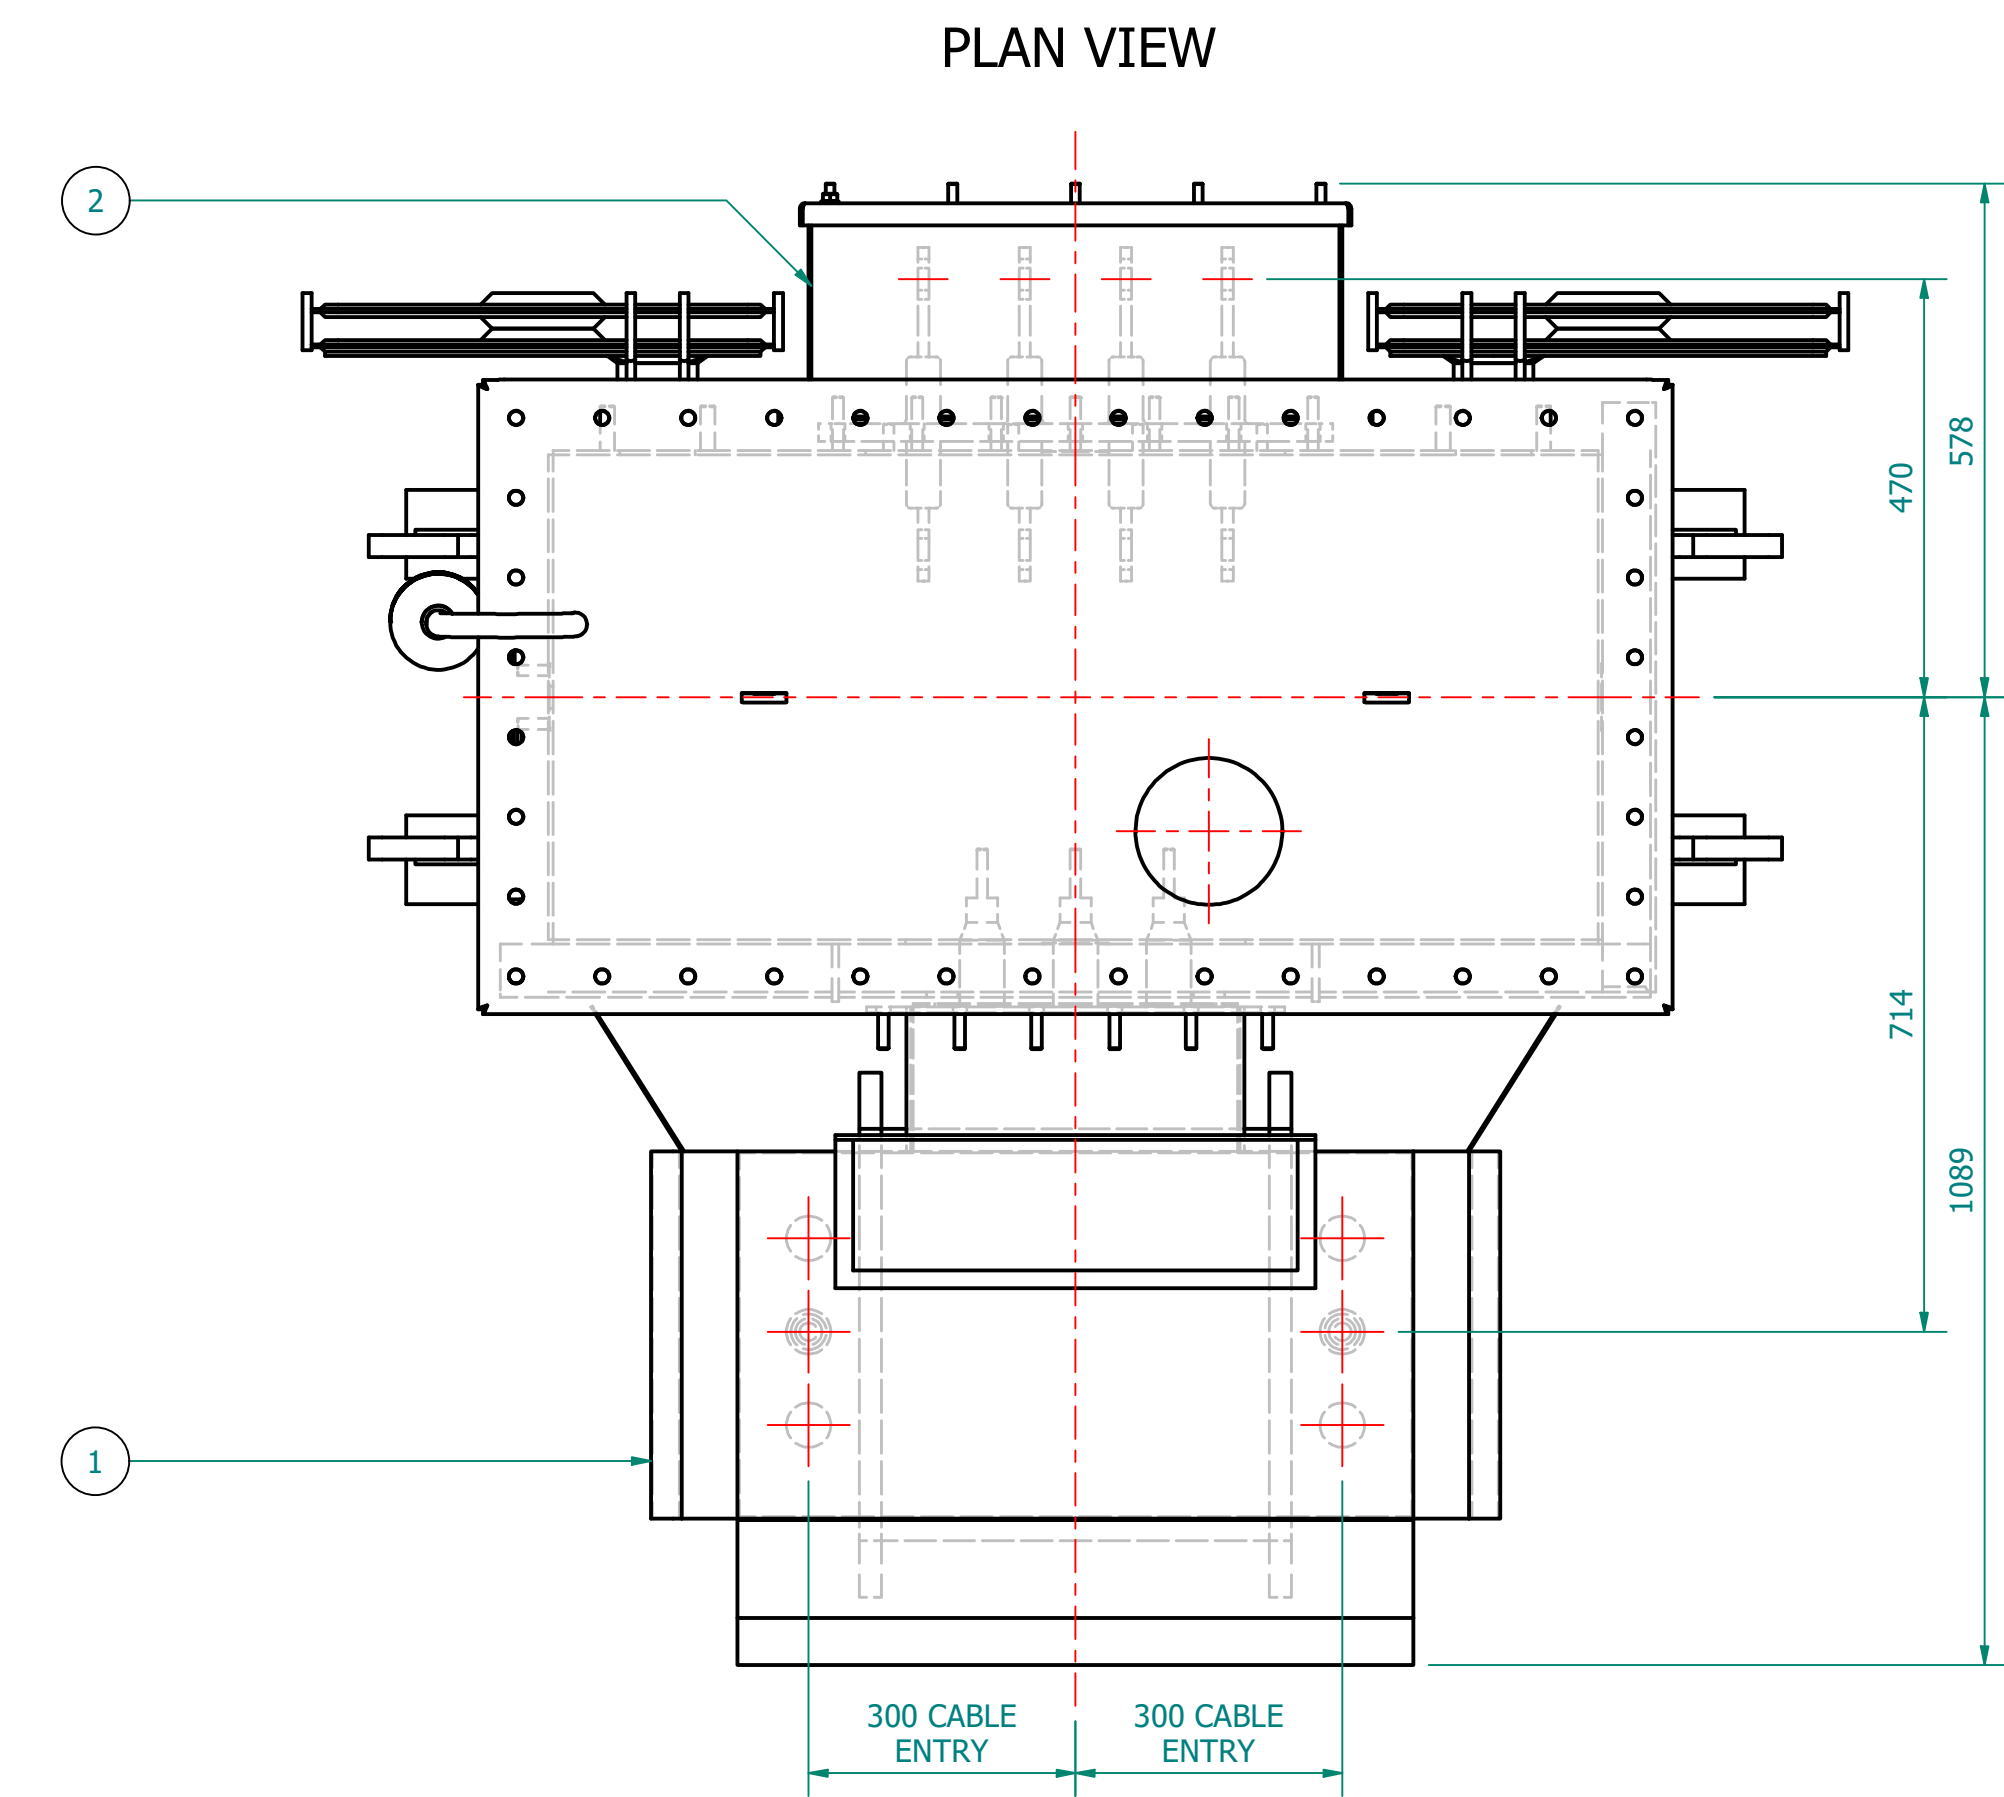
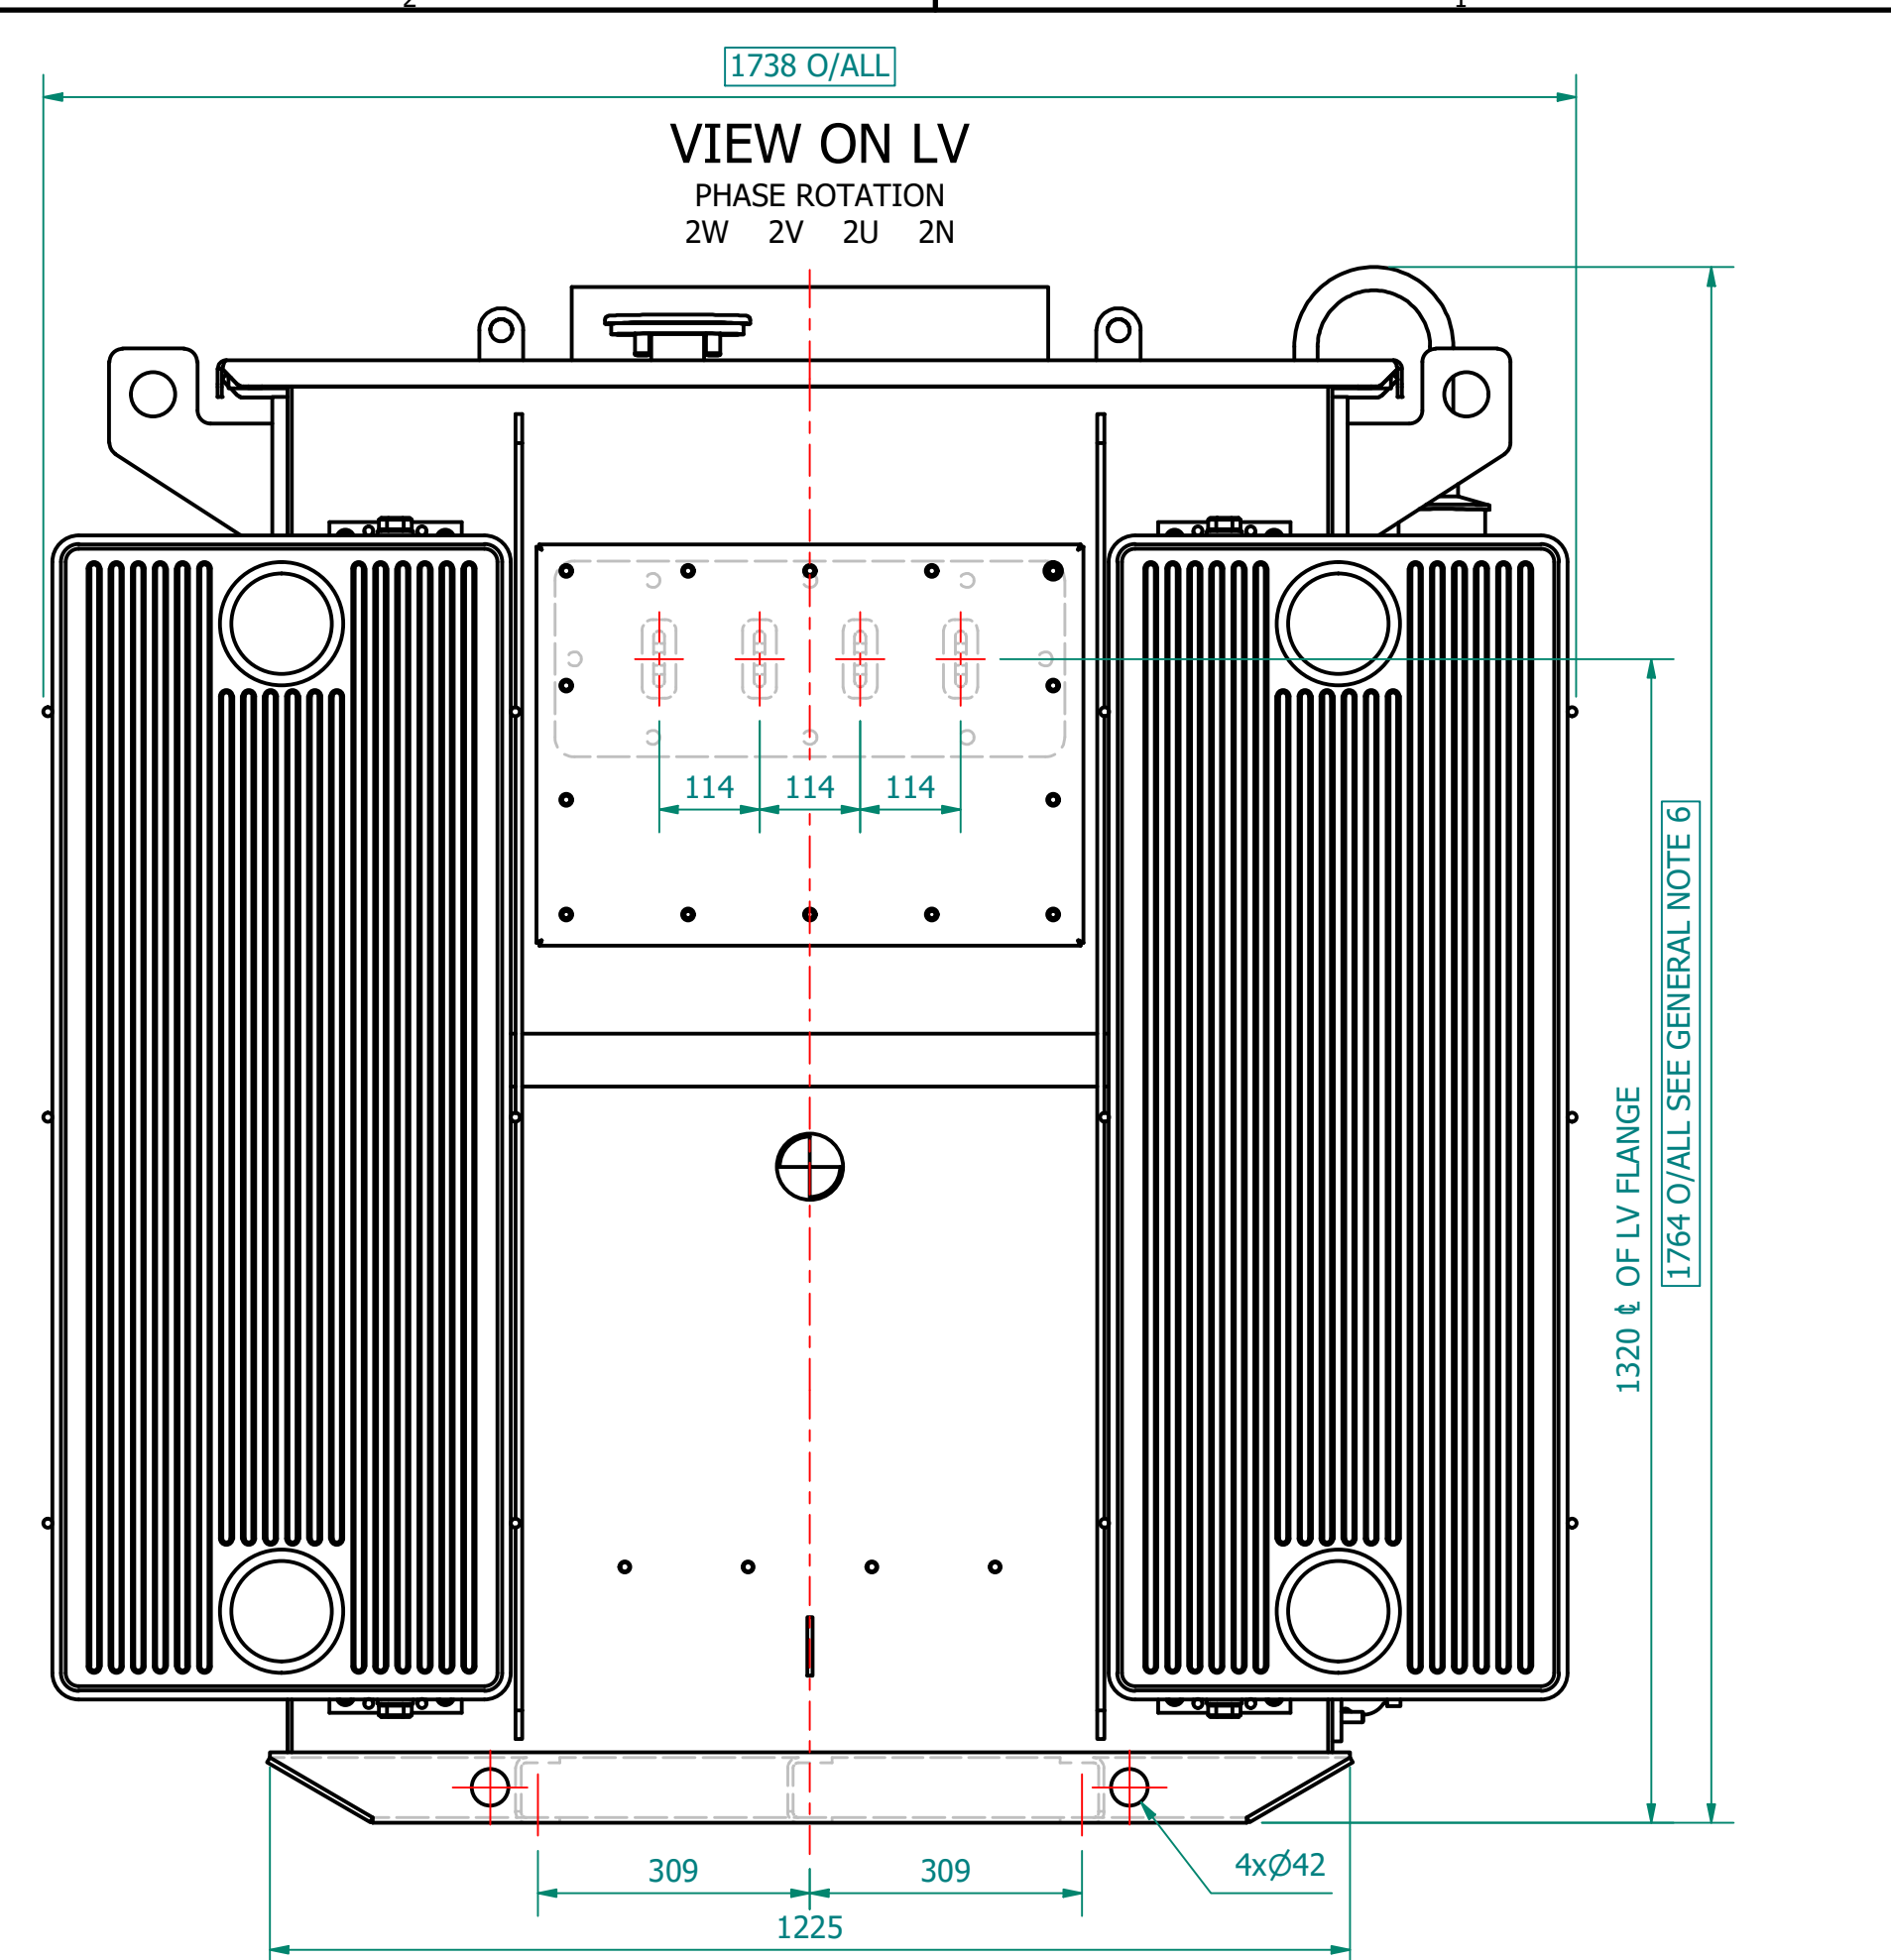
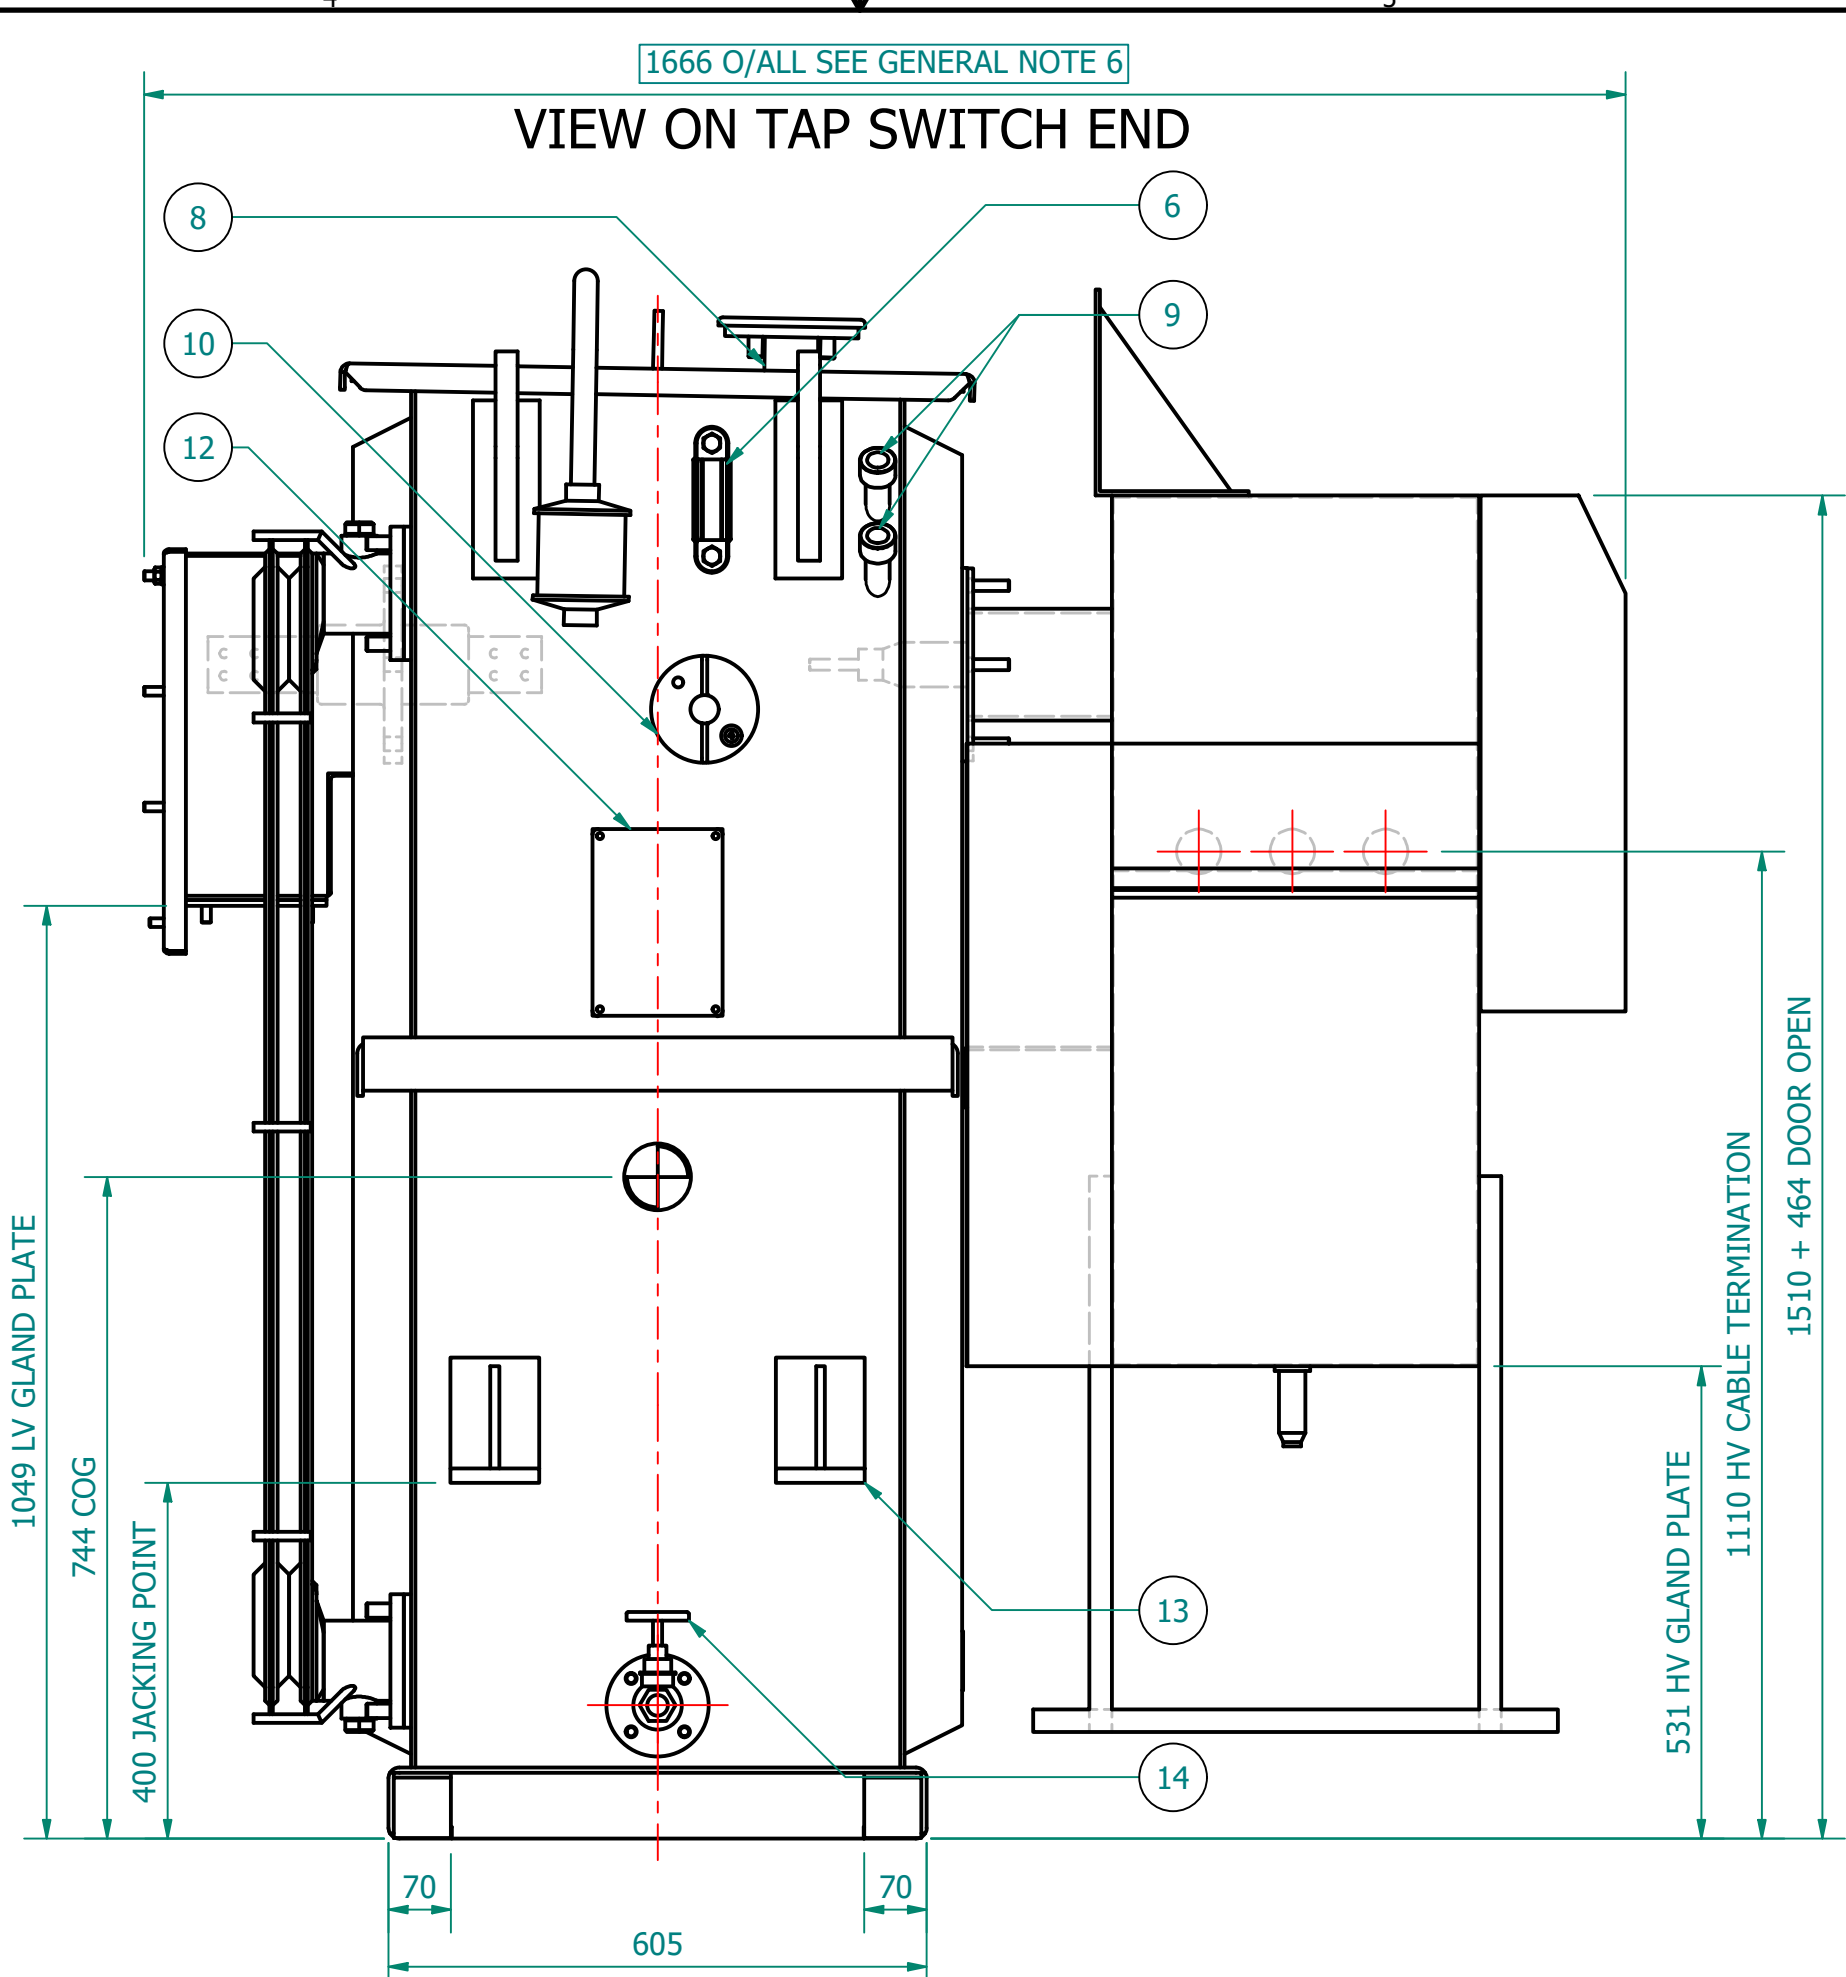


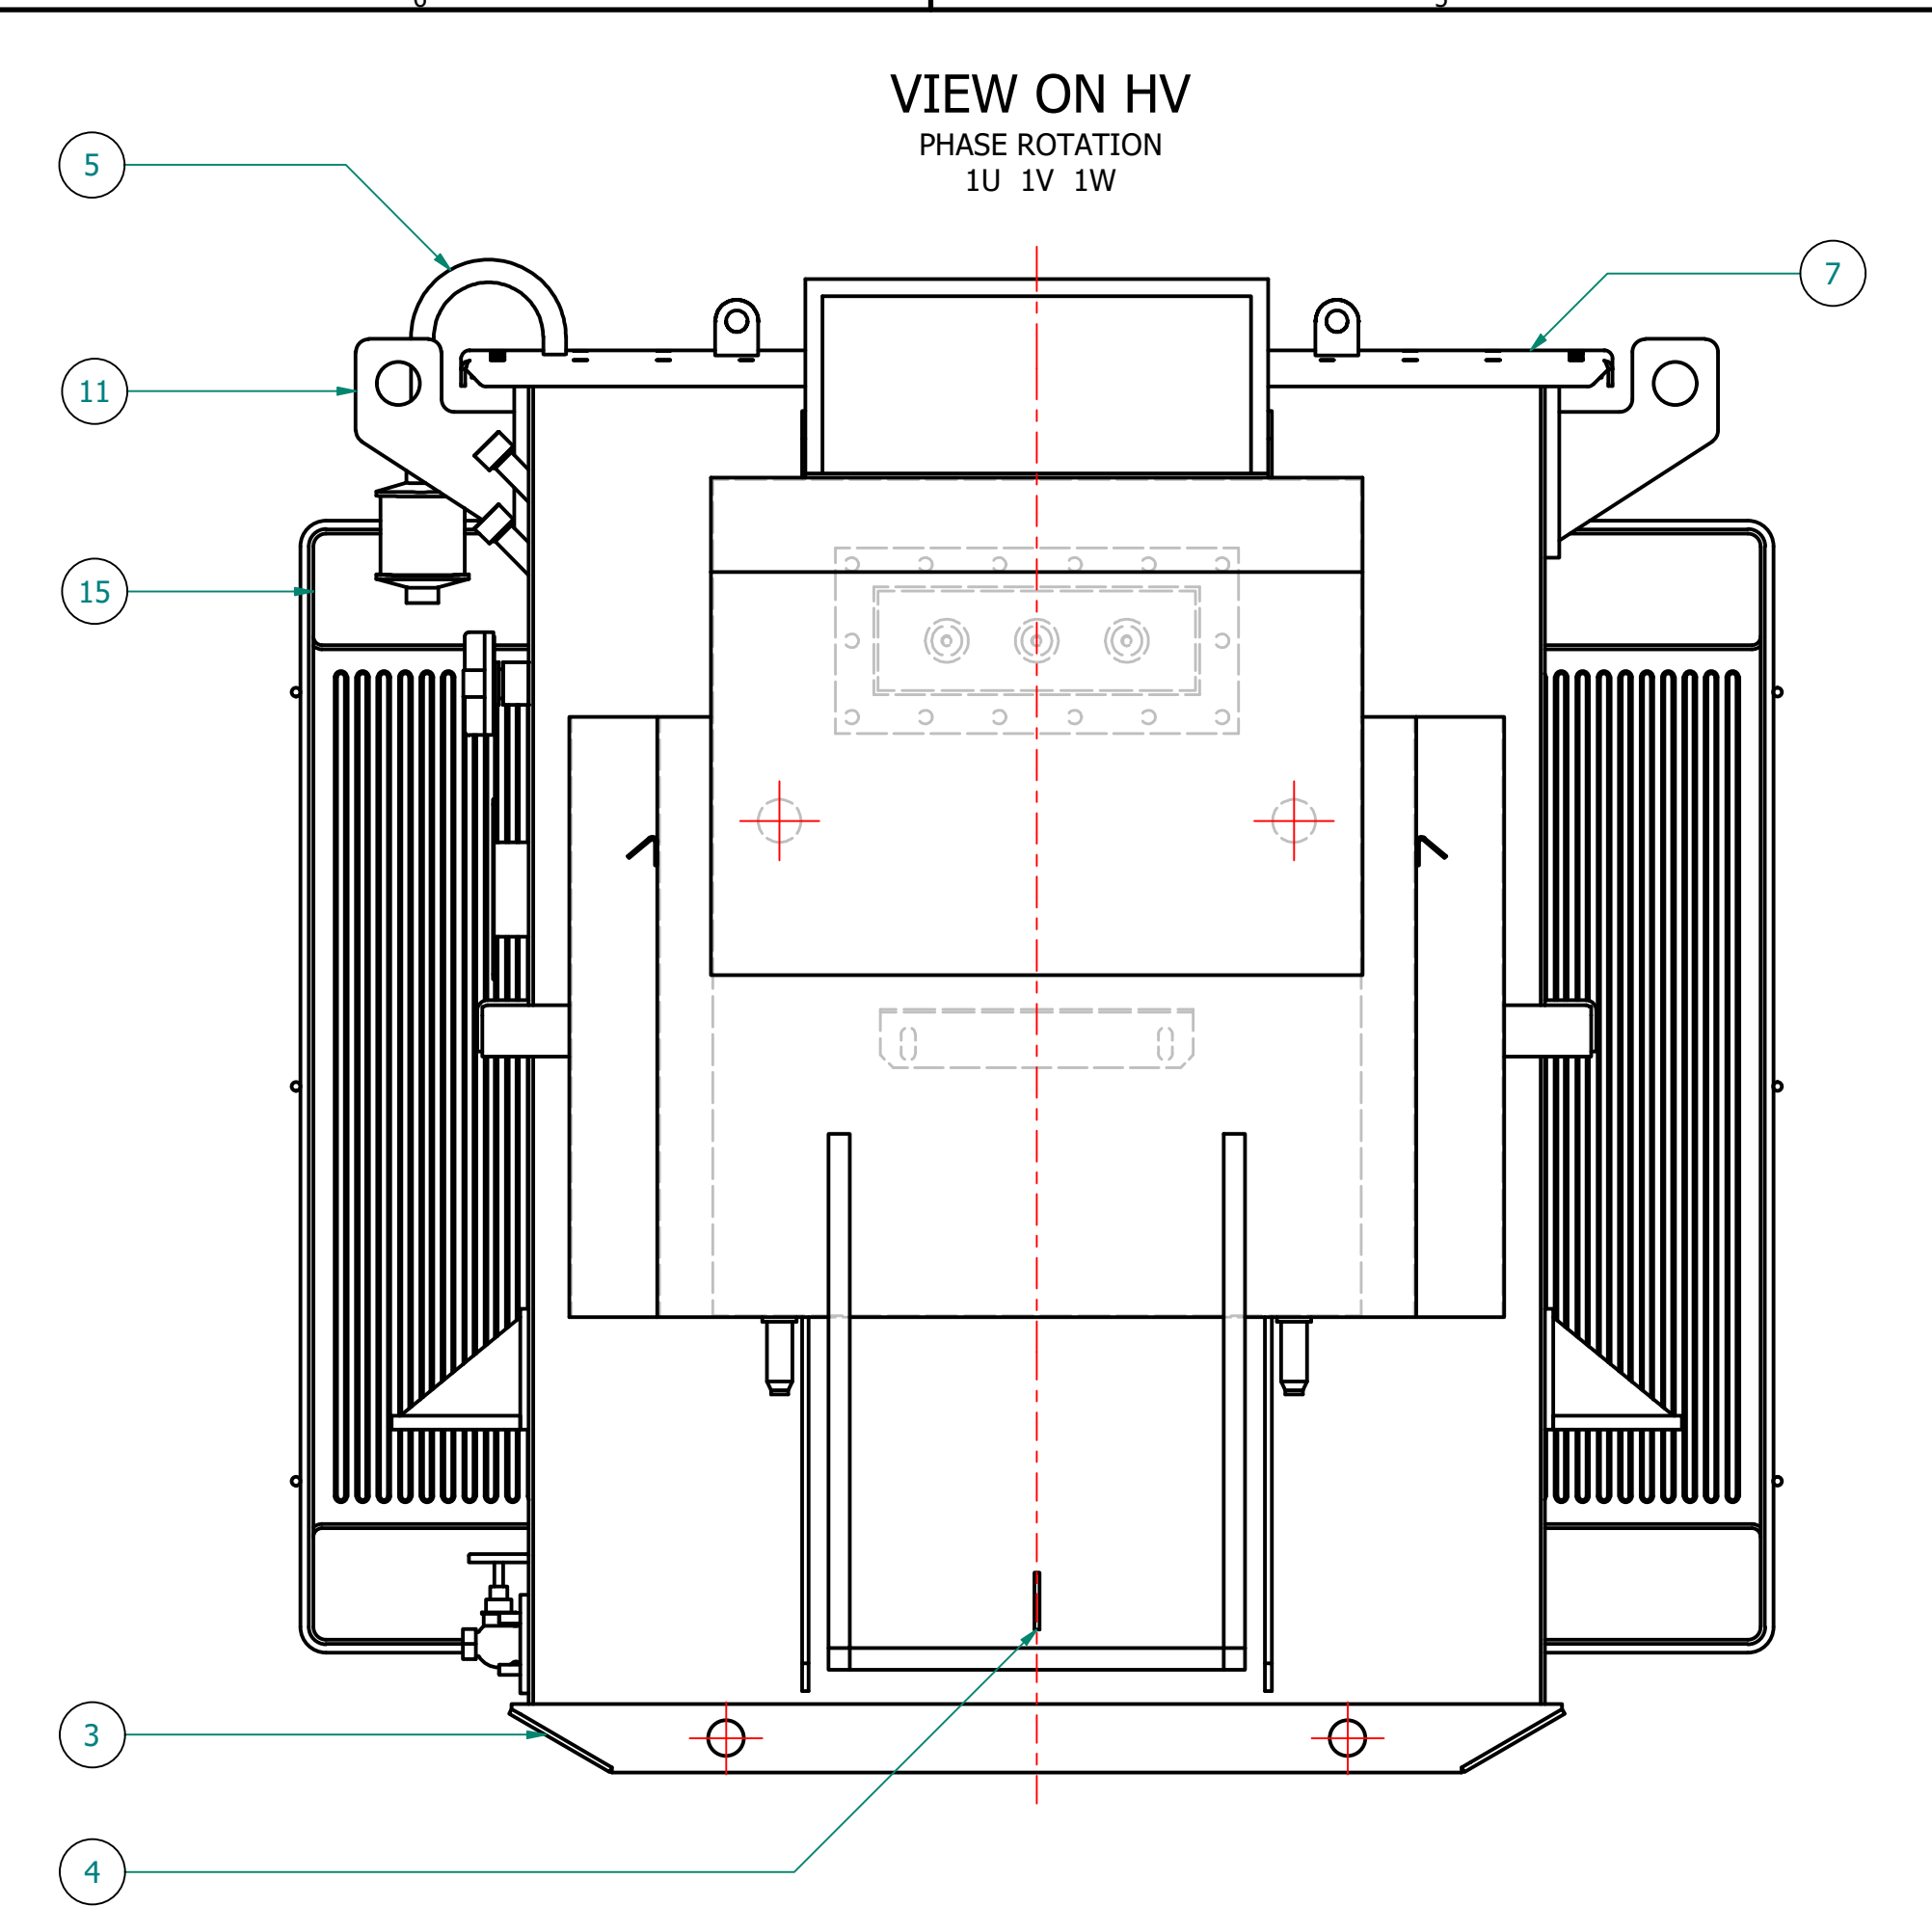

TRANSFORMER WEIGHT & VOLUME		
CORE AND WINDING	kg	1285
TANK AND FITTING	kg	690
COOLING LIQUID VOLUME	L	645
COOLING LIQUID WEIGHT	kg	525
TOTAL TX WEIGHT	kg	2500
ADDITIONS TO THE TRANSFORMER WEIGHT		
HV UNIT	Kg	385

VIEW OF LV SIDE - CABLE CLEAT STUDS
CABLES MUST BE SUPPORTED IN ACCORDANCE WITH
CURRENT IET Wiring Regulations BS7671 & IEC 61914

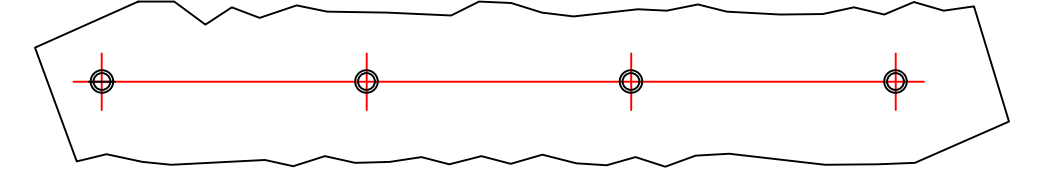


ESSENTIAL LABELS

ITEM 10 TAP CHANGER WARNING LABEL

ITEM 6 COLD COOLANT LEVEL

ITEM 2 LV WARNING LABEL

ITEM 1 HV WARNING LABEL

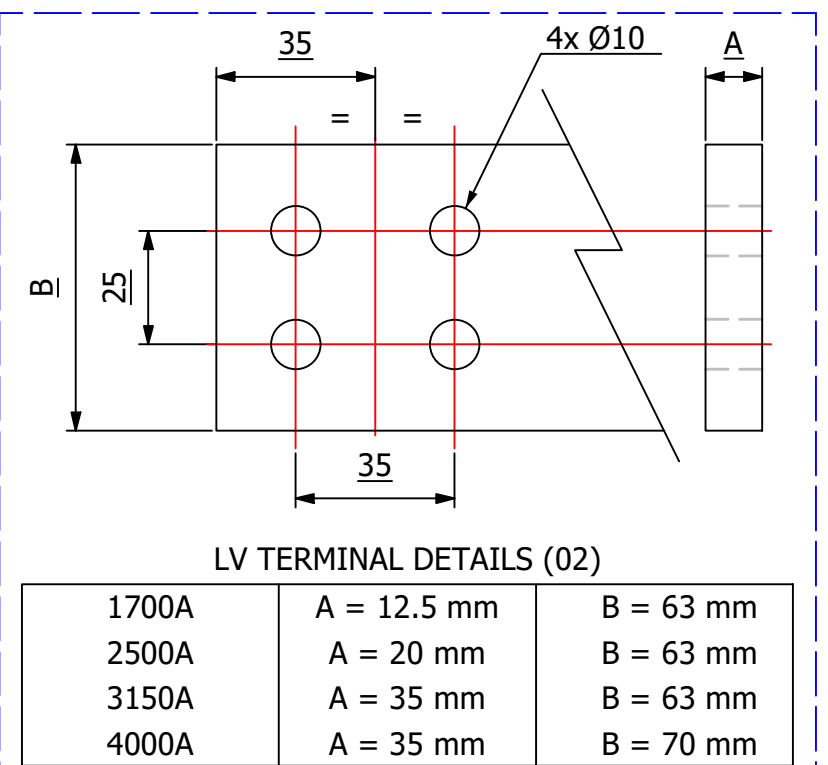

500KVA			ELECTRICAL RATINGS		
No Load Voltage Ratio at Normal Tap	HV Tappings	Vector Group	Frequency	Full-Load Current at Normal Tap	
				HV Side	LV Side
11000 / 433V	+5.0 to -5.0% in 2.5% INCREMENTS	Dyn11	50Hz	26.243A	666.686A
Design Impedance at Normal Tap	No Load Losses at rated Voltage & Frequency	Full Load Losses at rated Current & at 75°C Temp.	Temp. Rise above Ambient 40°C		
			in Oil by Therm.	in Wdg. by Res.	
4.75%	459W	3900W	60°C	65°C	
GENERAL NOTES					
1 ALL DIMENSIONS ARE IN 'mm'.					
2 ALL DIMENSIONS/WEIGHTS ARE SUBJECT TO ± 10% TOLERANCE.					
3 ELECTRONIC SCALE - 1:1 (ONLY WRITTEN DIMENSIONS TO BE FOLLOWED).					
4 TOLERANCE ON IMPEDANCE PER IEC:60076.					
5 PAINT SHADE.: 632 As PER BS:381C (SEMI GLOSS) TO ISO12944 - MIN C4H SPEC.					
6 O/ALL DIM IS SUBJECT TO EQUIPMENT DOOR OPENING DISTANCES.					
7					
8					
9					

ITEM	QTY	DESCRIPTION
15	2	DETACHABLE RADIATORS with AIR-RELEASE & DRAIN PLUG (520W x 1200C x 25 x 40P)
14	1	DRAIN VALVE (25NB) with MALE PLUG
13	4	JACKING PADS
12	1	RATING & DIAGRAM PLATE (SS)
11	4	TRANSFORMER LIFTING LUGS
10	1	OFF-CIRCUIT TAP SWITCH (5-Position & Padlockable)
9	2	THERMOMETER POCKET (3/4" BSP MALE THREAD)
8	1	OIL FILLING PIPE WITH FLANGED COVER
7	1	TOP COVER with LIFTING LUGS (x2)
6	1	OIL LEVEL GAUGE (with 15°) COLD OIL LEVEL MARK
5	1	ENVIRO GEL BREATHING TYPE R
4	2	EARTHING TERMINAL (FLAT TYPE suitable for M12 Bolt)
3	1	TRANSFORMER BASE (SKID TYPE) c/w HAULAGE HOLES & BRACING
2	1	LV CABLE BOX - 1.1kV, 4-POLE, AIR INSULATION, (FACING-'F', BS:2562) SUITABLE FOR 1 x 1c CABLES PER PHASE & N - MAX. 630mm.sq
1	1	HV RMU - 11kV, 200A, GCB, 630A BUS [Schneider RN2d-Tx/21] x PROTECTION, (FACING-'E' BS:2562)

IF IN DOUBT - ASK. REMOVE ALL SHARP EDGES. DO NOT SCALE. DRAWING NOT TO SCALE

LAST DEFINITION				
REV	REV BY	VERIFIED	APPROVED	DESCRIPTION

REVISION DESCRIPTION		REV	PROJECT
ORIGINAL		00	CUSTOMER
			S.O. NUMBER
			P.O. NUMBER
			W.O. NUMBER
REV. BY: M. STOTSJUK		DATE: 06-APR-2021	
VERIFIED:			
APPROVED:			

DRAWING TITLE	
GENERAL ARRANGEMENT DRAWING FOR 500kVA WILSON T2 ECOTRANS 11000/433V, 50Hz, Dyn11, ONAN AL WOUND DISTRIBUTION TRANSFORMER RN2d	

web: www.wilsonpowersolutions.co.uk email: info@wilsonpowersolutions.co.uk

Wilson Power Solutions Ltd.
Westland Square, Leeds,
West Yorkshire LS11 5SS, United Kingdom
Tel: +44 (0) 113 271 7588
Fax: +44 (0) 113 277 5124

DRAWN BY: M. STOTSJUK DATE: 06/04/2021 DRG NO: **WPS-T2-500-AL-006**