
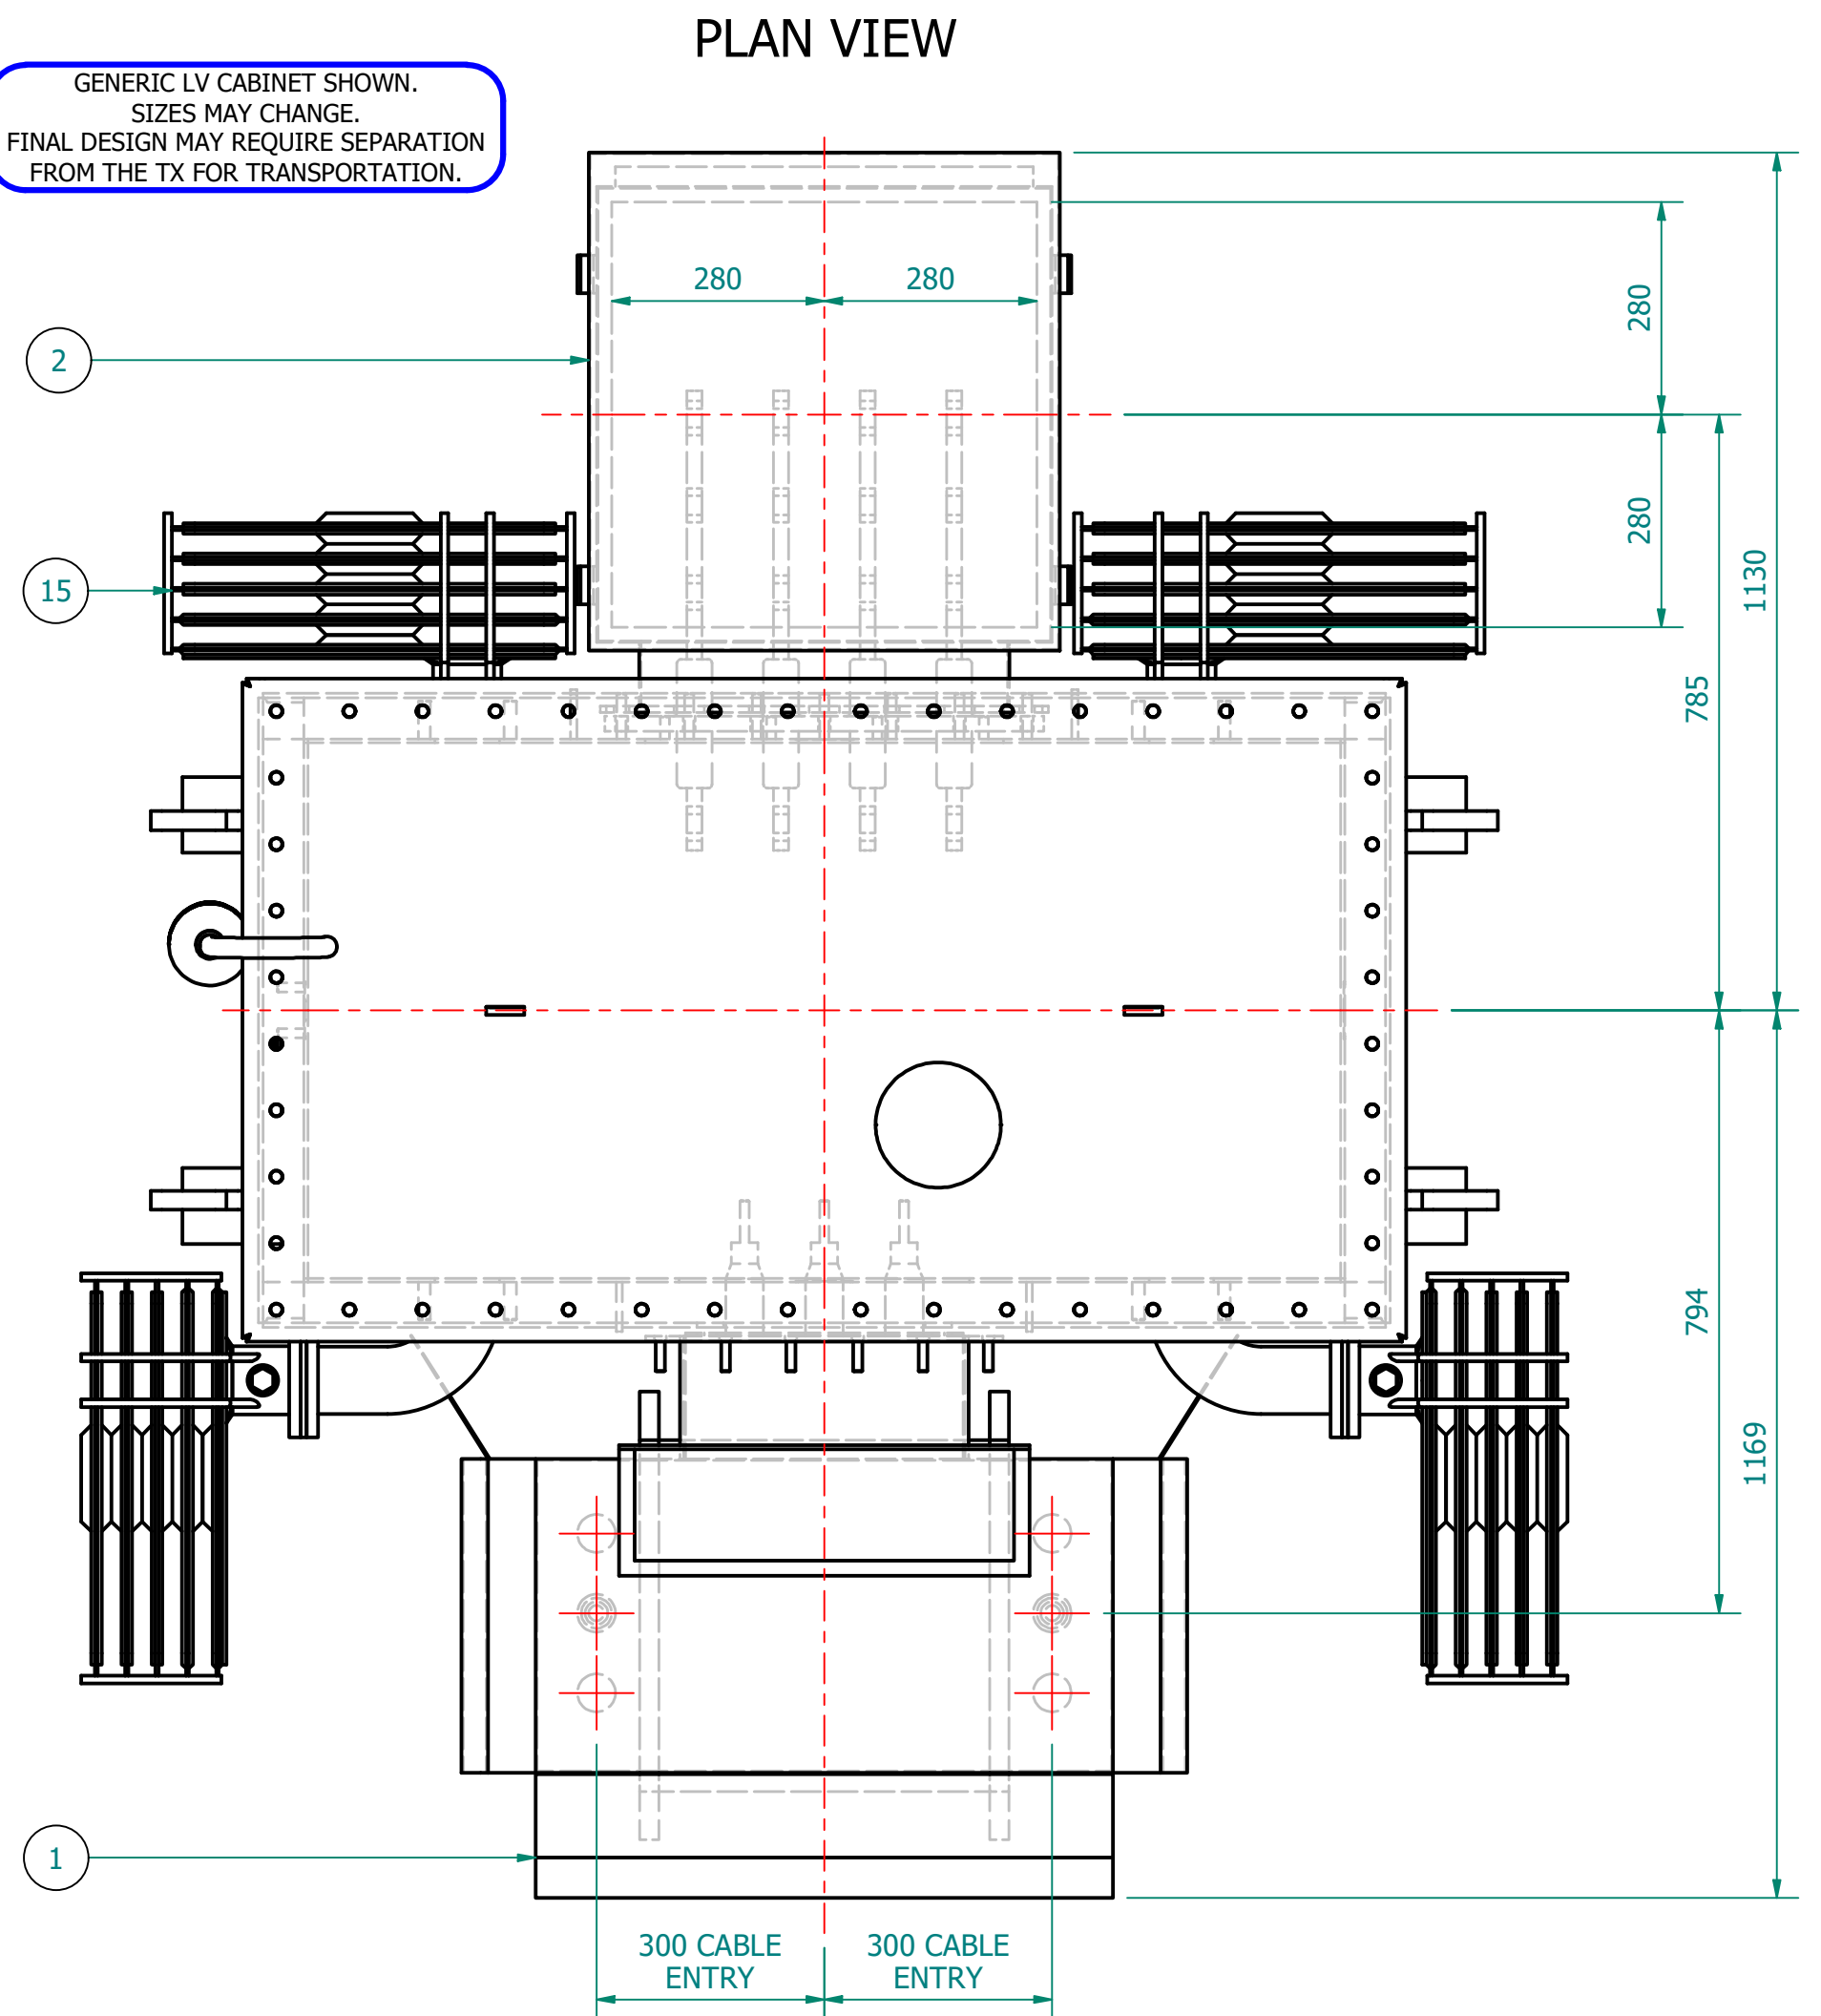
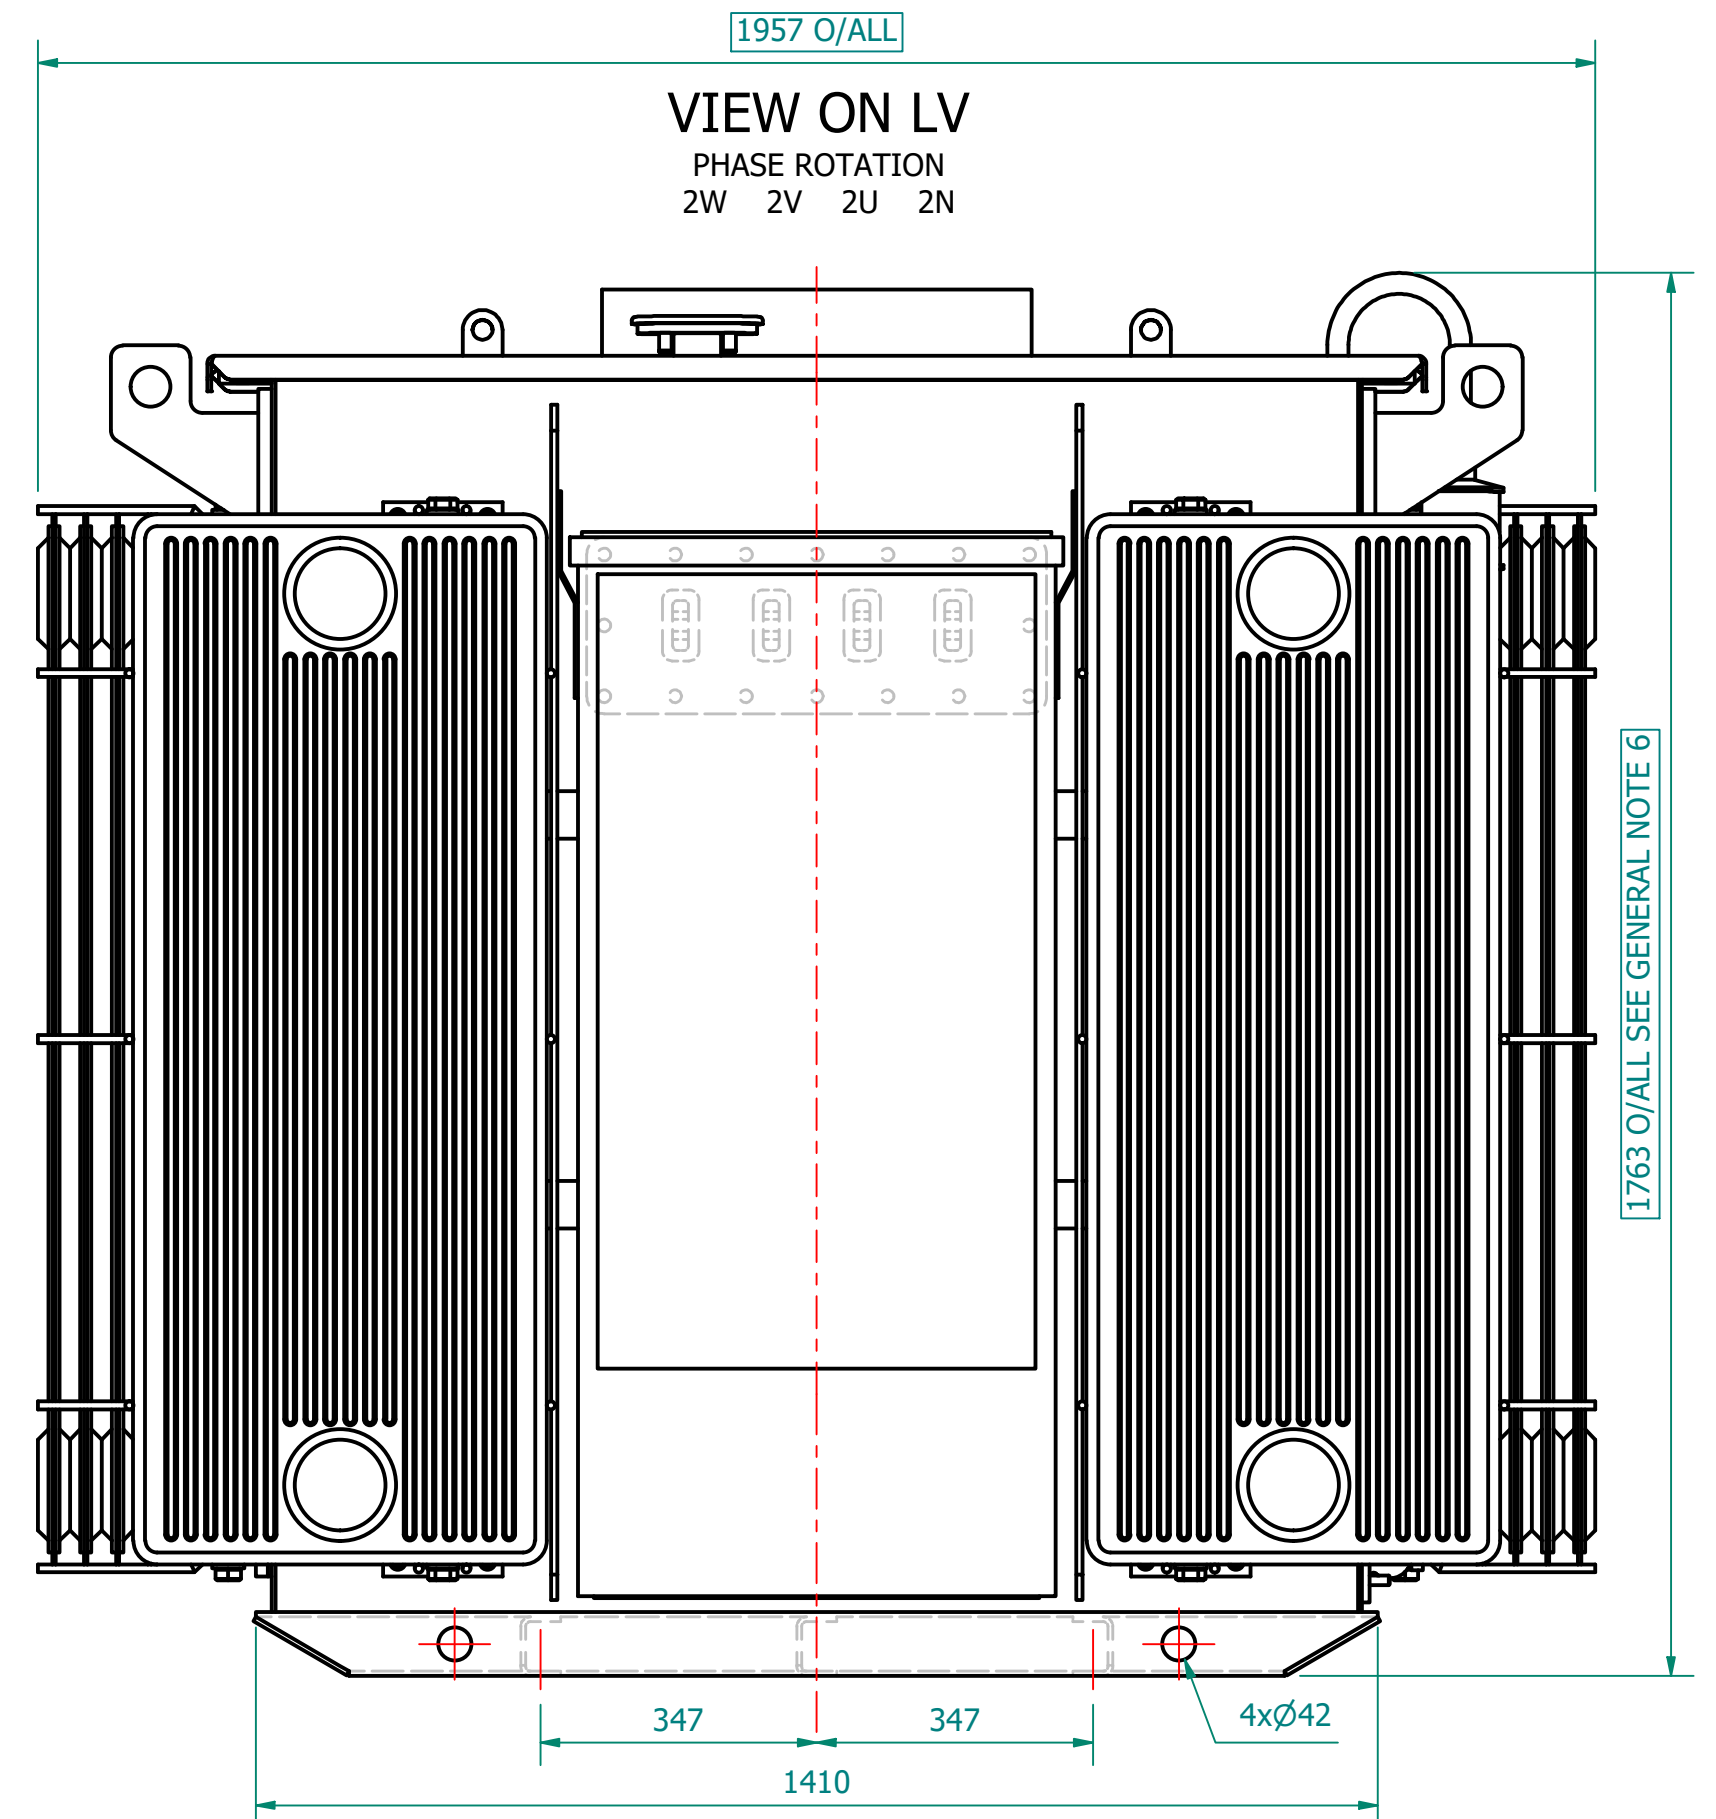
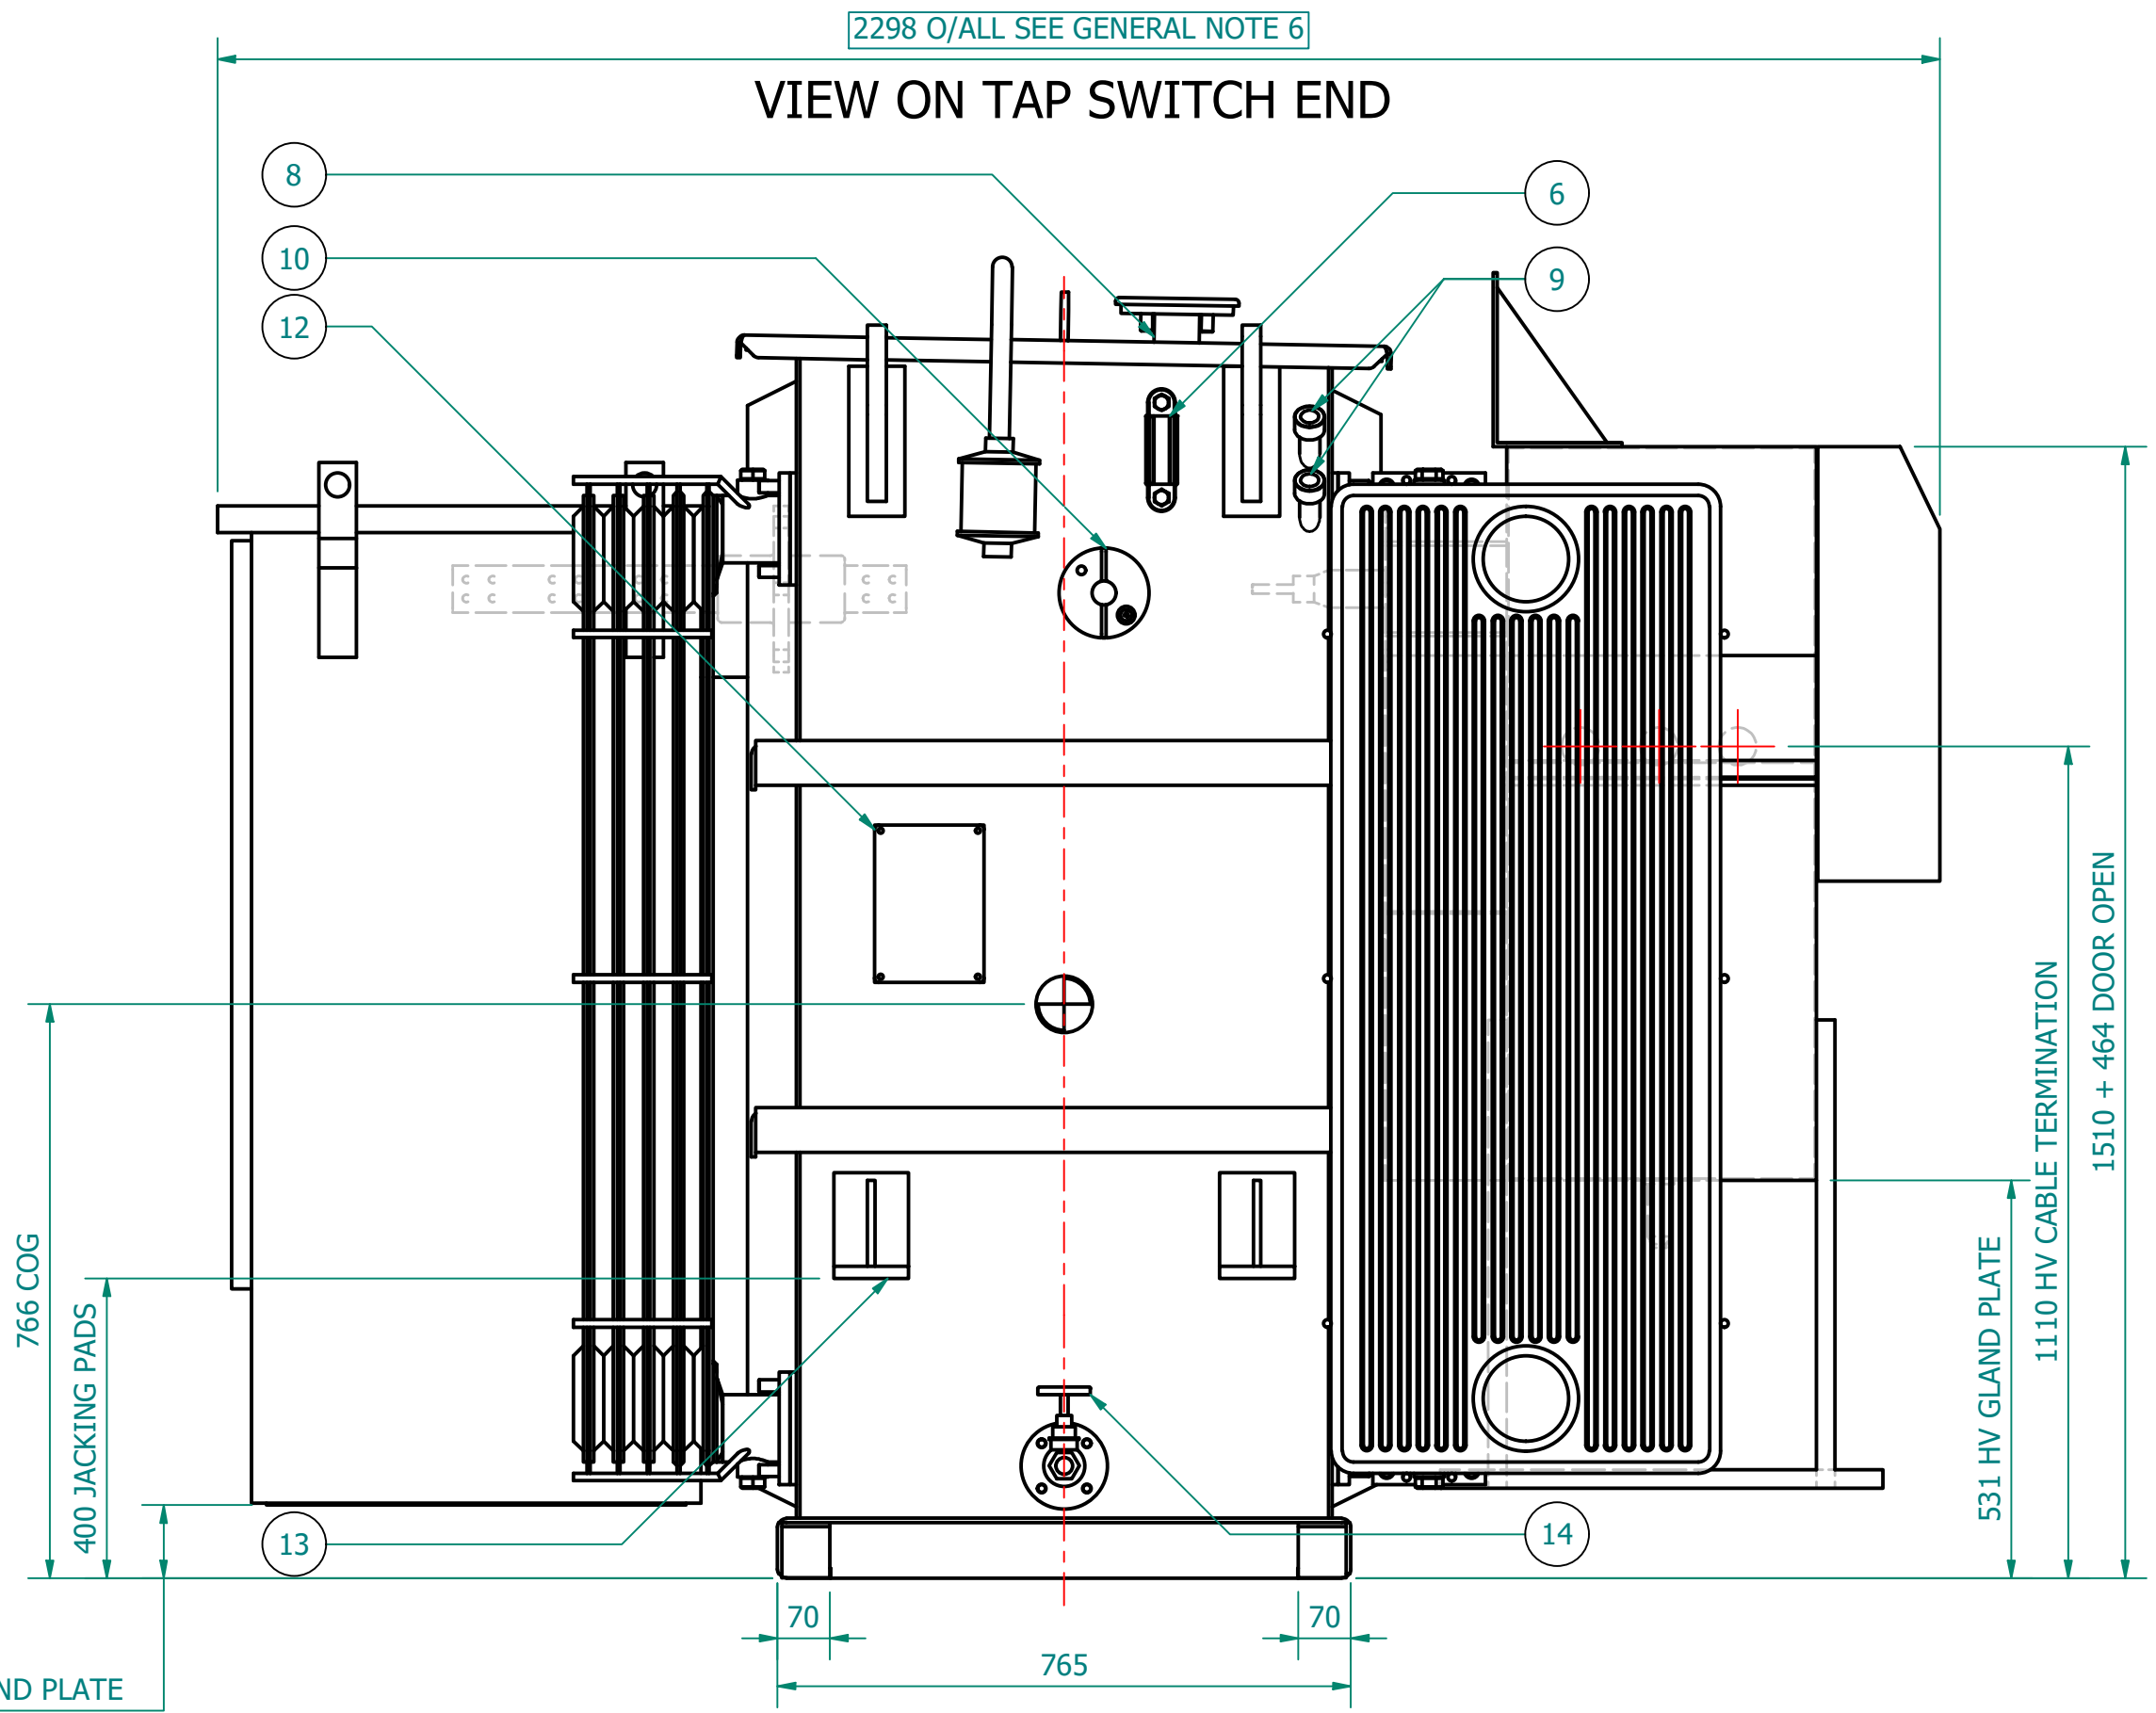


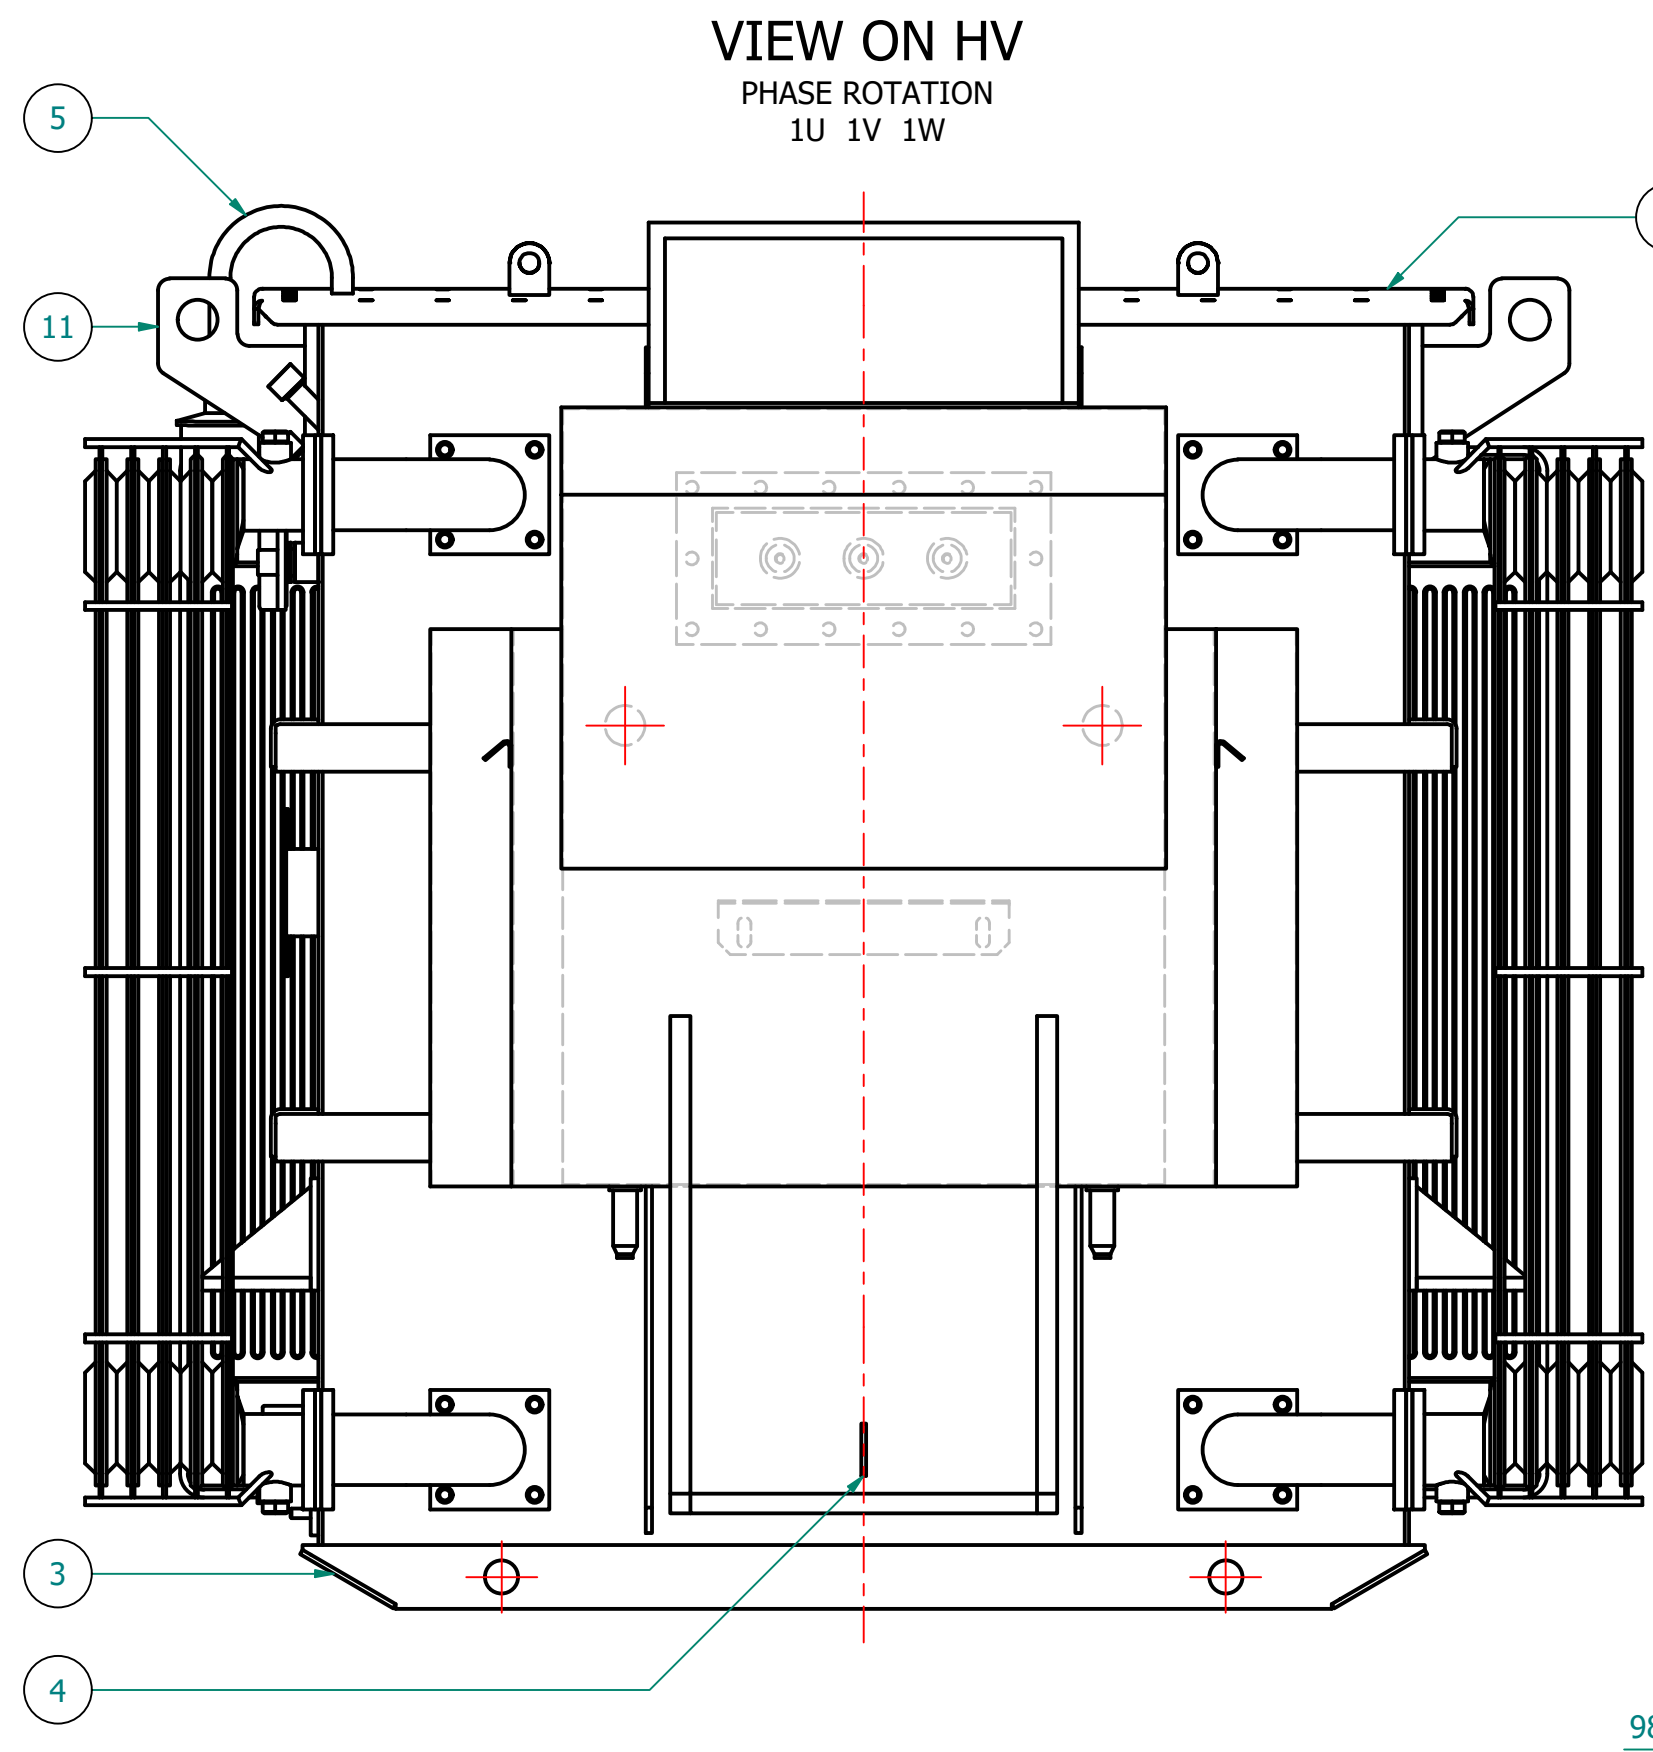

TRANSFORMER WEIGHT & VOLUME		
CORE AND WINDING	kg	2545
TANK AND FITTING	kg	1020
COOLING LIQUID VOLUME	L	900
COOLING LIQUID WEIGHT	kg	735
TOTAL TX WEIGHT	kg	4300
ADDITIONS TO THE TRANSFORMER WEIGHT		
HV UNIT	Kg	385
LV CABINET	kg	-

ESSENTIAL LABELS

- ITEM 10 TAP CHANGER WARNING LABEL
- ITEM 6 COLD COOLANT LEVEL
- ITEM 2 LV WARNING LABEL
- ITEM 1 HV WARNING LABEL

1500kVA		ELECTRICAL RATINGS			
No Load Voltage Ratio at Normal Tap	HV Tappings	Vector Group	Frequency	Full-Load Current at Normal Tap	
				HV Side	LV Side
11000 / 433V	+5.0 to -5.0% in 2.5% INCREMENTS	Dyn11	50Hz	78.730A	2000.059A
Design Impedance at Normal Tap	No Load Losses at rated Voltage & Frequency	Full Load Losses at rated Current & at 75°C Temp.	Temp. Rise above Ambient 40°C		
			in Oil by Therm.		in Wdg. by Res.
5.5%	1015W	11285W	60°C	65°C	
GENERAL NOTES					
1 ALL DIMENSIONS ARE IN 'mm'.					
2 ALL DIMENSIONS/WEIGHTS ARE SUBJECT TO ± 10% TOLERANCE.					
3 ELECTRONIC SCALE - 1:1 (ONLY WRITTEN DIMENSIONS TO BE FOLLOWED).					
4 TOLERANCE ON IMPEDANCE PER IEC:60076.					
5 PAINT SHADE.: 632 AS PER BS:381C (SEMI GLOSS) TO ISO12944 - MIN C4H SPEC.					
6 O/ALL DIM IS SUBJECT TO EQUIPMENT DOOR OPENING DISTANCES.					
7 EXTENDED ELBOWS FITTED TO HV SIDE.					
8					
9					

15	4	DETACHABLE RADIATORS with AIR-RELEASE & DRAIN PLUG (520W x 1200C x 55 x 40P)
14	1	DRAIN VALVE (25NB) with MALE PLUG
13	4	JACKING PADS
12	1	RATING & DIAGRAM PLATE (SS)
11	4	TRANSFORMER LIFTING LUGS
10	1	OFF-CIRCUIT TAP SWITCH (5-Position & Padlockable)
9	2	THERMOMETER POCKET (3/4" BSP MALE THREAD)
8	1	OIL FILLING PIPE WITH FLANGED COVER
7	1	TOP COVER with LIFTING LUGS (x2)
6	1	OIL LEVEL GAUGE (with 15°) COLD OIL LEVEL MARK
5	1	ENVIRO GEL BREATHER TYPE R
4	2	EARTHING TERMINAL (FLAT TYPE suitable for M12 Bolt)
3	1	TRANSFORMER BASE (SKID TYPE) c/w HAULAGE HOLES & BRACING
2	1	LV CABINET, BOTTOM ENTRY, GENERIC - SUBJECT TO CHANGE, (FACING-'F', BS:2562)
1	1	HV RMU - 11kV, 200A, GCB, 630A BUS [Schneider RN2d-Tx/21] x PROTECTION, (FACING-'E' BS:2562)
ITEM	QTY	DESCRIPTION
PARTS LIST		

IF IN DOUBT - ASK. REMOVE ALL SHARP EDGES. DO NOT SCALE. DRAWING NOT TO SCALE

LAST DEFINITION				LAST REVISION				REVISION DESCRIPTION				DRAWING TITLE			
REV	REV BY	VERIFIED	APPROVED	REV	REV BY	VERIFIED	APPROVED	ORIGINAL	00	PROJECT	CUSTOMER	GENERAL ARRANGEMENT DRAWING FOR 1500kVA WILSON T2 ECOTRANS 11000/433V, 50Hz, Dyn11, ONAN/KNAN AL WOUND DISTRIBUTION TRANSFORMER LV CABINET & RN2d			
								REV. BY: M. STOTSJUK	DATE: 08-APR-2021	S.O. NUMBER	P.O. NUMBER				
								VERIFIED:		W.O. NUMBER					
								APPROVED:							
BASED ON:				DRAWN BY: M. STOTSJUK				DATE: 08/04/2021				DRG NO: WPS-T2-1500-AL-A007			